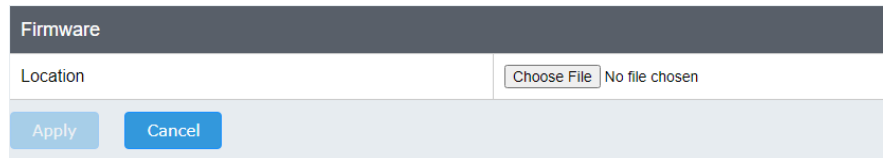


Firmware Upgrade Procedure

Upgrade through user interface

1. Log into to the access point configuration page (default IP is 192.168.10.100 for TEW-940APBO and 192.168.10.50/192.168.10.51 for TEW-940APBO2K or <http://tew-940apbo>)
2. Click on the **Management** and click on **Upload Firmware**.
3. Depending on your web browser, in the **Upload Firmware** section, click **Browse** or **Choose File**.

A screenshot of a web interface for uploading firmware. It features a dark grey header bar with the word "Firmware" in white. Below the header is a light grey form area. On the left side of the form is a text input field labeled "Location". To the right of this field is a button labeled "Choose File" and the text "No file chosen". At the bottom of the form are two buttons: "Apply" (light blue) and "Cancel" (blue).

4. Navigate to the folder on your computer where the unzipped firmware file (*.bin*) is located and select it.
5. Click **Apply**. If prompted, click **Yes** or **OK**. Wait until the firmware upload completed and the device reboots.