



## LMR200 Reverse SMA to N-Type Cable TEW-L202/L208

The LMR200 Reverse SMA to N-Type Cable extends your wireless Antenna up to 2 or 8 meters to provide optimal placement for your antenna outdoors. Connect business networks from building to building wirelessly or provide wireless Internet access for hot spot applications! This cable makes wireless communication possible by providing low loss communication between your access point and antenna.

### FEATURES

- Wi-Fi Compliant with 2.4GHz 802.11 b/g & 5GHz 802.11a Devices for extending wireless networks
- Reverse SMA Female to N-Type Male Connector.
- Optimal placement of your existing Wi-Fi Device permits you to maximize its wireless performance
- Flexible outer conductor allows the tightest bend radius available for any cable of similar size and performance
- Provides flexible Low-loss communication for wireless antenna
- 50dB RF Shielding is 10 dB greater than typical single shielded coax (40 dB).
- Multi-ply bonded outer foil conductor is rated conservatively at > 90 dB.
- Weatherproof cable design for outdoors exposure with best materials for UV resistance
- Polyethylene jacketed cable designed for outdoor use
- Easy and quick deployment into a WLAN environment

### DETAIL VIEW



# LMR200 Reverse SMA to N-Type Cable


## TEW-L202/L208

### SPECIFICATIONS

Construction	
Inner Conductor (Solid BC)	• 0.044 in. (1.12 mm)
Dielectric (Foam PE)	• 0.116 in. (2.95 mm)
Outer Conductor (Aluminum Tape)	• 0.121 in. (3.07 mm)
Over Braid (Tinned Copper)	• 0.144 in. (3.66 mm)
Jacket (PE)	• 0.195 in. (4.95 mm)
Mechanical	
Bend Radius: Installation	• 0.5 in. (12.7 mm)
Bend Radius: Repeated	• 2.0 in. (50.8 mm)
Bending Moment	• 0.2 ft-lb (0.27 N-m)
Weight	• 0.022 lb/ft (0.03 kg/m)
Tensile Strength	• 40 lb (18.2 kg)
Flat Plate Crush	• 15 lb/in. (0.27 kg/mm)
Environment	
Temperature	<ul style="list-style-type: none"> <li>• Operating: -40° C ~ 85° C (-40°F~185°F)</li> <li>• Storage: -70° C ~ 85° C (-94°F~185°F)</li> </ul>

Electrical	
Cut-off Frequency	• 39 GHz
Velocity of Propagation	• 83%
Dielectric Constant	• 1.45
Time Delay	• 1.22 nS/ft (4.02 nS/m)
Impedance	• 50 ohms
Capacitance	• 24.5 pF/ft (80.3 pF/m)
Inductance	• 0.061uH/ft (0.20 uH/m)
Shielding Effectiveness	• > 90 dB
DC Resistance	
Inner Conductor	• 5.36ohms/1000ft (17.6 ohms/km)
Outer Conductor	• 4.9 ohms/1000ft (16.1 ohms/km)
Voltage Withstand	• 1000 Volts DC
Jacket Spark	• 3000 Volts RMS
Peak Power	• 2.5 kW

### ANTENNA CABLE SOLUTION

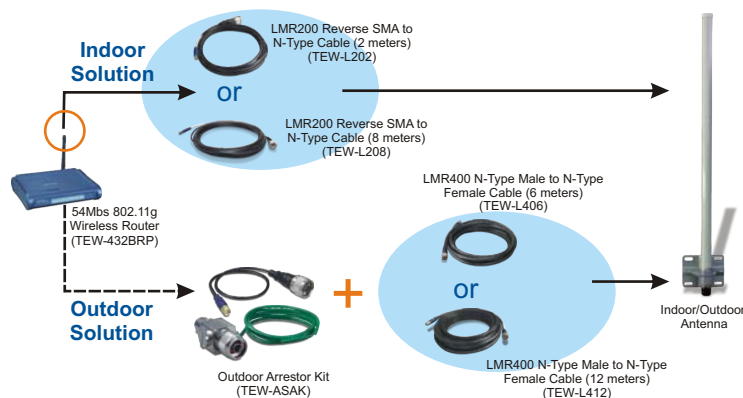

### PACKAGE CONTENTS

- TEW-L202 / TEW-L206
- User's Guide
- Weatherproof Tape

### RELATED PRODUCTS

TEW-AO080	8dBi Outdoor Omni-Directional Antenna
TEW-ASAK	Outdoor Arrestor Kit
TEW-L406/TEW-L412	LMR400 N-Type Male to N-Type Female Cable

### ORDERING INFORMATION

#### TRENDnet

3135 Kashiwa Street, Torrance, CA 90505 USA  
 Tel: 1-888-777-1550  
 Fax: 310-891-1111  
 Web: [www.trendnet.com](http://www.trendnet.com)  
 Email: [sales@trendnet.com](mailto:sales@trendnet.com)

To Order Please Call:

**1-888-326-6061**