



54Mbps 802.11g Wireless 2-Port Multi-Function USB 2.0 Print Server TEW-MP2U

The 54Mbps 802.11g Wireless 2-Port Multi-Function USB 2.0 Print Server (TEW-MP2U) is designed to transform virtually any stand-alone multi-function USB printer into a shared resource on your wireless network. An intuitive utility application and a user-friendly configuration interface provide a seamless user experience. LED indicators, bidirectional support and e-mail notifications allow for easy management. With support for most operating systems, simply connect up to two devices to this product for instant wireless multimedia and file sharing. This product offers a cost effective solution to the challenge of integrating multi-function printer, fax, scanner and storage devices within a wireless

FEATURES


- Wi-Fi compliant with IEEE 802.11b/g devices
- Compliant with USB 2.0 high speed printing
- Supports most USB printers and all-in-one multi-function printers *
- Two USB 2.0 ports and one RJ-45 10/100Mbps auto-negotiation fast Ethernet port
- Supports 64/128-Bit WEP & WPA-PSK encryption
- TCP/IP protocol supports DHCP, SNMP, UPnP, FTP
- Provides two types of storage access modes: netusb mode and server mode
- Supports USB storage devices such as hard drives, flash drives and memory card readers
- Supports auto-connect for printing
- Email notification for adding/removing USB devices or system error messages
- Compliant with Windows 2000/XP/2003 Server/Vista (32-Bit) operation systems
- Windows based utility program and Web based configuration
- Built-in flash memory for easy firmware upgrade
- 3 year limited warranty

54Mbps 802.11g Wireless 2-Port Multi-Function USB 2.0 Print Server TEW-MP2U

SPECIFICATIONS

Hardware	
Standard	• Wired: IEEE 802.3 10Base-T, IEEE 802.3u 100Base-TX • Wireless: IEEE 802.11b/g
Printer Interface	• USB 2.0, 1 1 compliant USB type A port
LAN Port	• 10/100Mbps auto-negotiation UTP/STP Ethernet port
CPU/ SDRAM / Flash ROM	• RDC R3210-G 150MHz / 8MB / 2MB
USB Storage	• NetUSB mode: single-user access, FAT12/16/32 (read/write) and NTFS (read/write) • Server mode (FTP/SMB server): multi-user access. FAT12/16/32 (read/write) and NTFS (read)
Diagnostic LEDs	• Power, link, status, USB1, USB2
TCP/IP Protocol Supported	• DHCP, SNMP, UPnP, FTP
Transport Protocol	• TCP/IP
Supported OS	• Windows 2000/XP/2003 Server/Vista (32-Bit)
Management	• Windows based utility or Web based configuration
Power	• 12V DC 1A external switching power adapter
Power Consumption	• Max: 2.5W (without a peripheral)
Weights	• 110g (3.88oz.)
Product Dimensions (W x H x D)	• 101 x 70 x 26mm (3.98 x 2.76 x 1.02 in.)
Temperature	• Operating: 0°C ~ 50°C (32°F ~ 122°F); Storage: -25°~55°C (-13°~131°F)
Humidity	• 10%~90% (non-condensing)
Certification	• CE, FCC
Wireless	
Frequency	• 2.4 ~ 2.4835GHz
Encryption	• 64/128-Bit WEP, WPA-PSK(TKIP)
Antenna	• Built-in fixed 2dBi antenna
Data Rate	• 802.11b: 11Mbps, 5.5Mbps, 2Mbps, and 1Mbps • 802.11g: 54Mbps, 48Mbps, 36Mbps, 24Mbps, 18Mbps, 12Mbps, 9Mbps and 6Mbps

NETWORKING SOLUTIONS

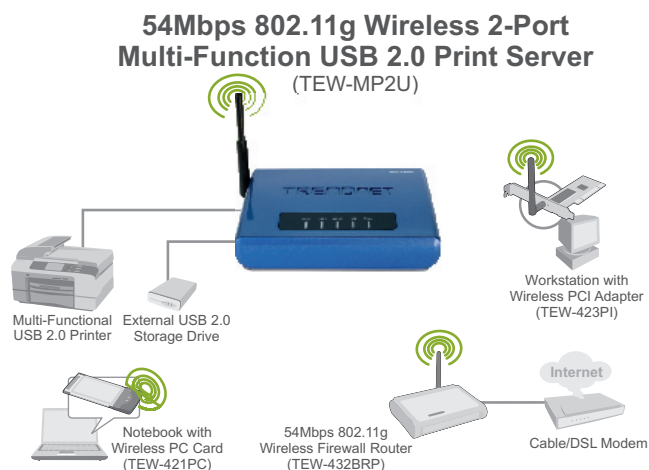

PACKAGE CONTENTS

- TEW-MP2U
- Multi-language quick installation guide
- Utility CD-ROM
- Switching power adapter (12V DC, 1A)

RELATED PRODUCTS

TE100-P1U	10/100Mbps USB 2.0 Print Server
TE100-MP1U	1-Port 10/100Mbps Multi-Function USB 2.0 Print Server
TE100-MP2U	2-Port 10/100Mbps Multi-Function USB 2.0 Print Server

ORDERING INFORMATION

TRENDnet[®]

20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500

Fax: 1-310-961-5511

Web: www.trendnet.com

Email: sales@trendnet.com

To Order Please Call:

1-888-326-6061

