



54Mbps 802.11g Wireless Multi-Port Print Server TEW-P21G (B1.0R)

TEW-P21G is a wireless print server that transforms virtually a stand-alone networkable USB or Parallel printer into a shared network printer. The TEW-P21G is compatible with IEEE 802.11g 54Mbps network and it has two USB 2.0 and one Parallel printer port. Network professionals can easily manage the print server using Web Browser and utilize the TEW-P21 to promote productivity in a workgroup environment with low equipment cost.

- FEATURES**
- Wi-Fi compliant with IEEE 802.11b/g devices
 - Built-in 1 Parallel (DB 25) and 2 USB 2.0 (type A) printer port
 - One RJ-45 10/100Mbps Auto-MDIX Fast Ethernet Port
 - Advanced wireless encryption: WEP, WPA-PSK, WPA2-PSK
 - LPR printing for Windows
 - IPP Printing for Windows 7/Vista/2003 Server/XP/2000
 - Printing over email and email notification
 - Supports Windows Graphical Devices Interface (GDI) printers*
 - Supports SNMP v1.0 and MIB II (RFC-1213)
 - Supports Macintosh Rendezvous Zero Configuration**
 - Windows-based setup wizard and configuration utility
 - Web-based (HTTP) configuration
 - Built-in flash memory for easy firmware upgrade
 - 3-Year limited Warranty

* GDI feature is only compatible with HP GDI printer

** Mac Systems are only compatible with Post-Script printers


54Mbps 802.11g Wireless Multi-Port Print Server

TEW-P21G (B1.0R)

SPECIFICATIONS

Hardware	
Standards	• Wired: IEEE 802.3 10Base-T, IEEE 802.3u 100Base-TX • Wireless IEEE 802.11b/g
Printer Interface	• 2 x USB 2.0 type A port • 1 x Parallel DB25 (female) port
LAN Port	• 10/100Mbps Auto-MDIX RJ-45 Port
LED	• Power, LAN, WLAN, USB1, USB2, LPT
CPU/ SDRAM / Flash ROM	• RDC R2880 100MHz / 8MByte / 2MByte
Transport Protocol	• TCP/IP, SMB, NetBEUI, AppleTalk
TCP/IP Protocol Supported	• BOOTP, SNMP, Telnet, TFTP, FTP, LPD, RARP, DHCP, IPP
OS Support	• Windows 7(32/64-bit)/Vista(32/64-bit)/2003 Server/XP(32/64-bit)/2000/ME/98SE • Netware 5.x NDPS LPR Remote Printing (TCP/IP) • HP-UX Unix, Sun OS, Solaris, SCO Unix, AIX • Unixware, Linux & Mac OS (AppleTalk)
Management	• Windows utility or Web browser configuration
Power	• 5V DC 2.5A External Power Adapter
Dimensions	• 195 x 120 x 30mm (7.7 x 4.7 x 1.25 inches) Not including antenna.
Weight	• 300 g (0.75lb)
Temperature	• Operating: 0° C ~50° C (32° F~122° F) • Storage: -25° C ~55° C (-13° F~131° F)
Humidity	• Max. 90% (non-condensing)
Certification	• CE, FCC
Wireless	
Frequency	• 2.4 ~ 2.4835 GHz (Industrial Scientific Medical Band)
Module Technique	• 802.11b: CCK (11 and 5Mbps), DQPSK (2Mbps), DBPSK (1Mbps) • 802.11g: OFDM
Encryption	• 64/128-Bit WEP, WPA-PSK, WPA2-PSK(TKIP/AES)
Antenna	• 2dBi detachable Antenna (Reverse SMA Connector)
Data Rate	• 802.11g: up to 54Mbps • 802.11b: up to 11Mbps
Channel	• 1~11 Channels (FCC), 1~13 Channels (ETSI)

NETWORKING SOLUTIONS

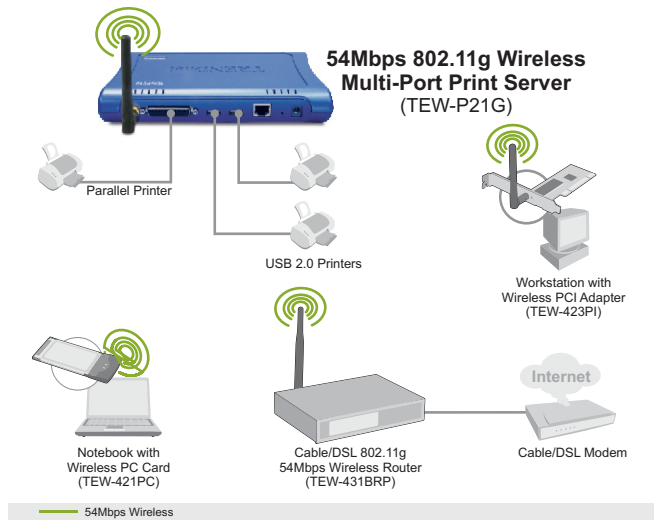

PACKAGE CONTENTS

- TEW-P21G
- Multi-Language Quick Installation Guide
- CD-ROM (Utility & User's Guide)
- Power Adapter (5V DC, 2.5A)

RELATED PRODUCTS

TEW-P1UG	54Mbps 802.11g Wireless USB 2.0 Print Server
TEW-P1PG	54Mbps 802.11g Wireless Parallel Print Server
TE100-P1U	10/100Mbps USB 2.0 Print Server

ORDERING INFORMATION

TRENDnet®

20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500

Fax: 1-310-961-5511

Web: www.trendnet.com

Email: sales@trendnet.com

To Order Please Call:

1-888-326-6061

