



56K (V.92) High Speed USB 2.0 Data/TAM /Voice Modem TFM-560U

The TFM-560U High Speed USB 2.0 Fax Modem delivers fast access to the Internet with more efficient upload and download speeds. The V.92/V.44 standard modem offers the highest possible data transfer rates and reliable fax transmissions. The modem utilizes the latest V.92 standard providing Internet connection features such as Quick Connect, Modem-on-Hold, and 48Kbps upload rates.

FEATURES


- Compliant with USB 2.0 and USB 1.1 Specifications
- Compliant with V.92, V.90, V.44 Standards
- Supports V.44 and V.92 Quick Connect, PCM Upstream and Modem On Hold Features
- Up to 56Kbps Data Download Speed and 48Kbps Data Upload Speed
- Hosts Signal Processing for both controller and data -pump
- Supports TAM (Telephone Answering Machine) via Sound Card
- Video Phone ready (Interface to H.324 Video Conferencing Support)
- Compatible with Windows 98SE/ME/2000/XP/2003 Server
- Support ITU-T T.31 Class 1 fax with transfer rate up to 14.4kbps
- USB Bus-Powered method and Low Power consumption
- Includes Data/Fax/Voice Communication Software
- LED Display
- 3-Year Warranty

56K (V.92) High Speed USB 2.0 Data/TAM/Voice Modem TFM-560U

SPECIFICATIONS

Hardware	
Standard	<ul style="list-style-type: none">• USB 2.0• USB 1.1
Interface	<ul style="list-style-type: none">• 1 x USB 2.0 /1.1 (Type A), 1 x RJ-11 Port (Phone Line)
Data Mode	<ul style="list-style-type: none">• V.92 & V.90, V.34, V.32(bis), V.22(bis), V.22, V.23, V.21, Bell 212A, Bell 103
Error Correction	<ul style="list-style-type: none">• V.42, LAPM & MNP 2-4
Data Compression	<ul style="list-style-type: none">• V.44, V.42(bis) & MNP5
Fax Mode	<ul style="list-style-type: none">• ITU-T V.17, V.29, V.27ter and V.21 ch2, ITU-T T.31 Class1 Fax
Power Management	<ul style="list-style-type: none">• USB Bus-Powered
Power Consumption (Input 3.3VDC)	<ul style="list-style-type: none">• Idle Mode: 65mW, Operating Mode: 134mW
Dimensions	<ul style="list-style-type: none">• 100 x 35 x 23mm (3.94 x 1.38 x 0.91in.)
Weight	<ul style="list-style-type: none">• 25g (0.88oz.)
Temperature	<ul style="list-style-type: none">• Operating: 0°C~ 40°C (32°F~ 104°F) • Storage: -20°C~ 60°C (-4°F~140°F)
Humidity	<ul style="list-style-type: none">• 10%~90% (non-condensing)
Certifications	<ul style="list-style-type: none">• FCC, CE

NETWORKING SOLUTIONS

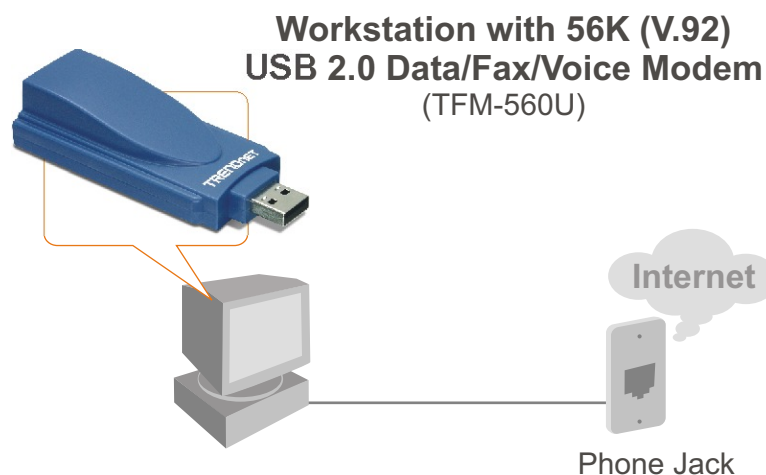

PACKAGE CONTENTS

- TFM-560U
- Multi-Language QIG
- Driver CD-ROM
- RJ-11 Telephone Cable

RELATED PRODUCTS

TFM-PCIV92A	56K (V.92) High Speed Internal PCI Data/Fax/Voice Modem
TFM-560X	External 56K (V.90) High Speed Voice/Fax Modem

ORDERING INFORMATION

TRENDnet®

20675 Manhattan Place, Torrance, CA 90501 USA
Tel: 1-310-961-5500
Fax: 1-310-961-5511
Web: www.trendnet.com
Email: sales@trendnet.com

To Order Please Call:

1-888-326-6061

