





## Outdoor IP66 Steel Enclosure with Lockable Hinged Door

TI-CA2 (v1.0R)

- Wall mount
- IP66 weather rated
- Use with TRENDnet's industrial switches, fiber converters, and PoE injectors
- Rugged steel construction
- Hinged door with waterproof door lock
- Removable bottom plate
- Mounting hardware included

The TRENDnet Outdoor IP66 Steel Enclosure with Lockable Hinged Door, model TI-CA2, is well suited for use with TRENDnet's line of industrial switches, fiber converters, and PoE injectors. The internal mounting plate provides a safe and convenient way to install a DIN-Rail for mounting industrial devices while protecting them from the elements. A wide operating temperature range of -40° – 60° C (-40° – 140° F) allows for installations in extreme hot or cold environments. This durable steel enclosure with lockable hinged door protects devices from exposure to the elements.

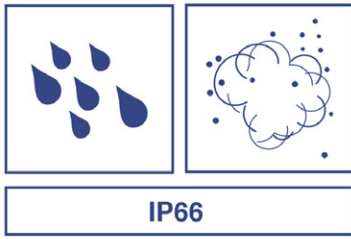

### Outdoor Rated

IP66 rated for outdoor use with TRENDnet industrial switches, fiber converters, and PoE injectors.


### Internal Mounting Plate

The internal mounting plate provides a safe and convenient way to install a DIN-Rail for mounting industrial devices while protecting them from the elements.

### Wide Temperature Range

A wide operating temperature range of -40° – 60° C (-40° – 140° F) allows for installations in extreme hot or cold environments.

## NETWORKING SOLUTION

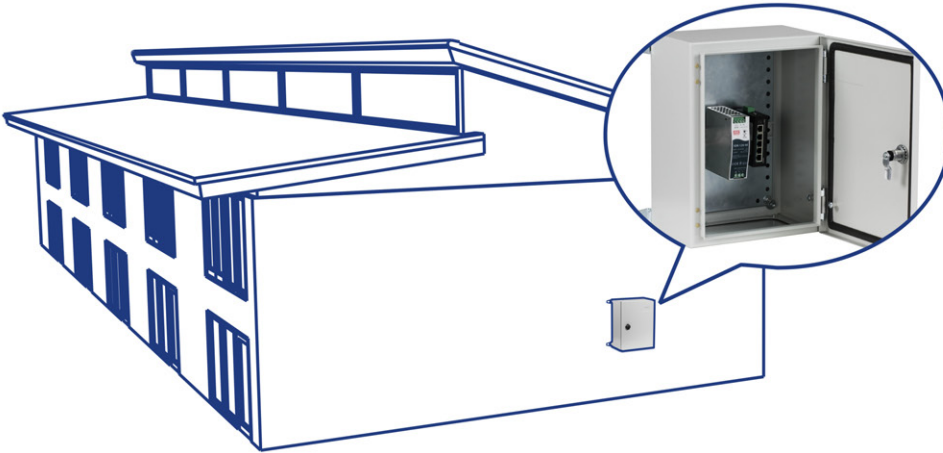

IP66 weather rated



## FEATURES



### Outdoor Rated

IP66 rated for outdoor use with TRENDnet industrial switches, fiber converters, and PoE injectors



### Wall Mount

Designed to be installed on vertical surfaces with the removable bottom plate facing downward



### Internal Mounting Plate

Internal mounting plate provides a safe and convenient way to install a DIN-Rail for mounting industrial devices while protecting them from the elements



### Wide Temperature Range

A wide operating temperature range of  $-40^{\circ} - 60^{\circ} \text{ C}$  ( $-40^{\circ} - 140^{\circ} \text{ F}$ ) allows for installations in extreme hot or cold environments



### Housing Design

Rugged steel construction with IP66 weather sealed lockable hinged door

## SPECIFICATIONS

### Hardware

- IP66
- 1.6mm SPHC hot rolled steel case
- 1.66mm SGCC hot dip galvanized steel (mounting plate)
- FIPFG sealing
- Waterproof door lock
- Removable bottom plate
- Wall mount

### Operating Temperature

- $-40^{\circ} - 60^{\circ} \text{ C}$  ( $-40^{\circ} - 140^{\circ} \text{ F}$ )

### Operating Humidity

- Max. 95% non-condensing

### Dimensions

- 400 x 300 x 200mm (15.75 x 11.8 x 7.9 in.)

### Weight

- 9.5kg (21 lb.)

### Warranty

- 3 year

### Package Contents

- TI-CA2
- Quick Installation Guide

All references to speed are for comparison purposes only. Product specifications, size, and galvanized shape are subject to change without notice, and actual product appearance may differ from that depicted herein.