




2-Port PS/2 Audio KVM Switch TK-208K

The 2-Port PS/2 KVM Switch with Audio lets you control multimedia PCs with just one keyboard, monitor, mouse, microphone, and a set of speakers. The KVM switch not only allows you to share your monitor, keyboard and mouse but you can also share microphone and speakers. With just a simple press of a button, this KVM switch eliminates the hassle of cable swapping and switching between 2 PCs. With its Hot-Plug, Auto-Scan, and Hot-Key operating features, the TK-208K is the perfect choice for managing 2 PCs. Separate KVM cables are included.

FEATURES

- Use one keyboard, monitor, and mouse to control two computer
- 2-Port PS/2 KVM switch with 1 set of Mic/Speaker port.
- 2 sets of PS/2, VGA and Audio & Microphone Cables
- Support Microsoft Intellimouse, Optical Mouse, Logitech Net Mouse and more
- Support very High Video Quality, up to 300MHz 2048 x 1536 VGA resolution
- Support Windows 98/98SE/ME/2000/XP/2003 Server and Linux
- Hot-Plug feature, add PC or remove the connected PC for maintenance without powering down the KVM Switch or other PC's.
- No software required, easy PC selection via Push Button or Hot-Key Commands
- Auto-Scan Mode for monitoring PC's.
- Keyboard status restored when switching between PCs.
- LED display for easy status monitoring
- PS/2 Interface Power method
- 2-Year Warranty

Console Port

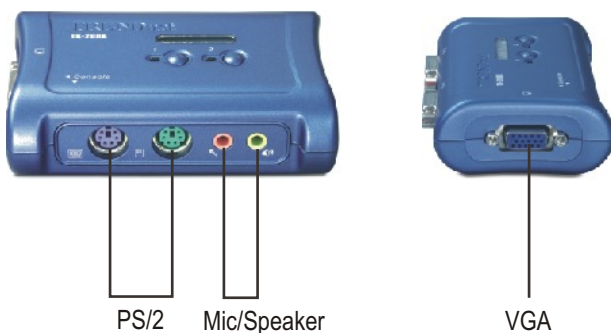

PC Port




2-Port PS/2 Audio KVM Switch TK-208K

SPECIFICATIONS

Hardware	
Computer Connections	• 2
KVM Cable	• 2 Sets of 1.2M (4ft) KVM & Audio Cables
Cable Connectors	
KVM	<ul style="list-style-type: none"> • To Console: 1 x 15-pin HDB type VGA (Male) • To PC: 1 x PS/2 Keyboard 6-pin Mini Din (Male), 1 x PS/2 Mouse 6-pin Mini Din (Male), 1 X VGA HDB 15-pin (Male)
Audio	<ul style="list-style-type: none"> • To Console: 2 x USB (Type Mini B) • To PC: 1 x 3.5mm audio in/out jack, 1 x 3.5mm microphone in/out jack
Console Connectors (All Female)	<ul style="list-style-type: none"> • 1 x PS/2 Keyboard 6-pin Mini Din (Female) • 1 x PS/2 mouse 6-pin Mini Din (Female) • 1 x VGA/SVGA HDB 15-pin (Female) • 1 x 3.5mm audio in/out jack • 1 x 3.5mm microphone in/out jack
Port Selection	• Push Buttons and Hot-Key Commands
Auto-Scan Interval	• 10 seconds
Keyboard State	• Saved and Restored
Power Type	• PS/2 Interface Power
Dimensions	• 98 x 70 x 2.8 mm (3.86 x 2.76 x 1.1 in.)
Weight	• 108 g (3.8 oz)
Temperature	<ul style="list-style-type: none"> • Operating: 0°C ~ 40°C (32°F ~104°F) • Storage: -20°C ~ 60°C (-4°F ~140°F)
Humidity	• 0%~90%, Non-Condensing
Certifications	• CE, FCC

NETWORKING SOLUTIONS

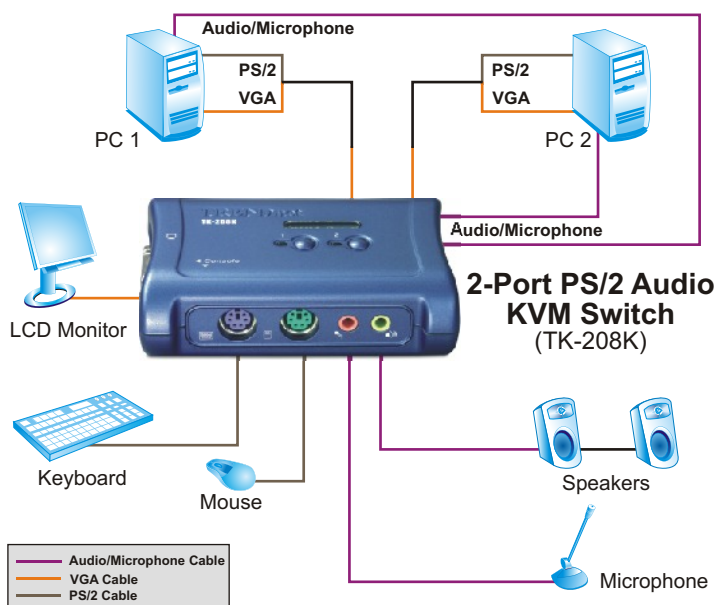

PACKAGE CONTENTS

- TK-208K
- Multi-Language User's Guide
- 2 sets of KVM & Audio Cables

RELATED PRODUCTS

TK-205K	2-Port PS/2 KVM Switch
TK-207K	2-Port USB KVM Switch
TK-210K	2-Port USB Hub and PS/2 KVM Switch with Audio

ORDERING INFORMATION

TRENDnet[®]

20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500

Fax: 1-310-961-5511

Web: www.trendnet.com

Email: sales@trendnet.com

To Order Please Call:

1-888-326-6061

