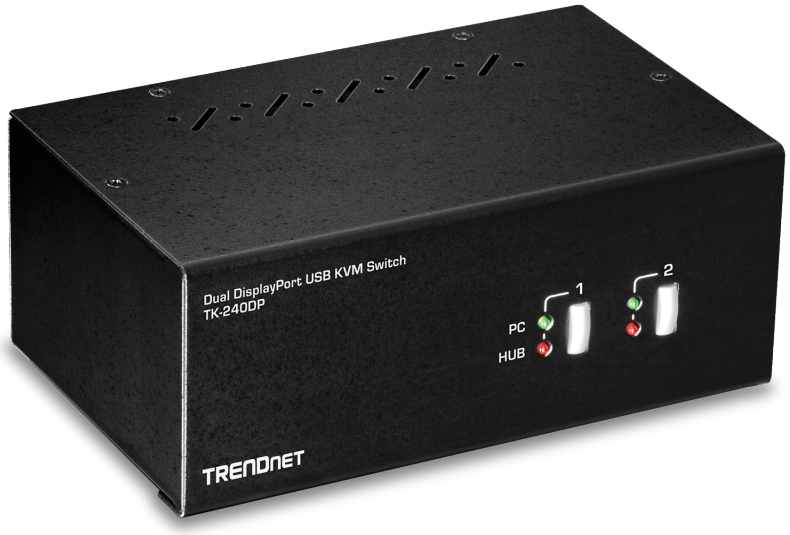

2-Port Dual Monitor DisplayPort KVM Switch

TK-240DP (v3.0R)

- Dual Monitor DisplayPort™ 1.2 KVM
- 3.5mm speaker and microphone connections
- Designed for use with Dual DisplayPort systems
- Supports 4K UHD resolutions up to 3840 x 2160 @ 60Hz
- Up to 2560 x 1440 @ 144Hz
- 2-Port USB 2.0 hub for storage devices and printers
- Required cabling (TK-CP06) sold separately
- No CD installation required

TRENDnet's 2-Port Dual Monitor DisplayPort KVM Switch, model TK-240DP, allows you to control two computers with one set of console controls. Experience up to 4K UHD resolutions, no driver installation required. The TK-240DP is designed for dual monitor systems with USB mouse and keyboard connections, and features a two-port USB hub to share storage devices or printers between computers.



DisplayPort Monitor
Designed to connect to two DisplayPort monitors

4K UHD Resolution
Supports resolutions up to 4K UHD (3840 x 2160 @ 60Hz)



USB 2.0 Hub
Two additional USB ports to connect storage drives and printers

NETWORKING SOLUTION

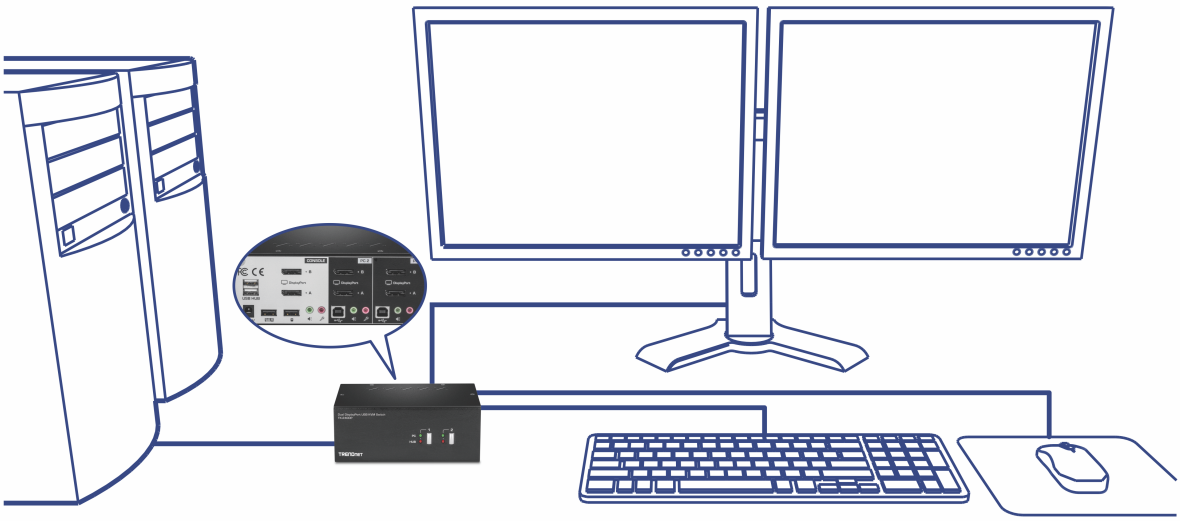

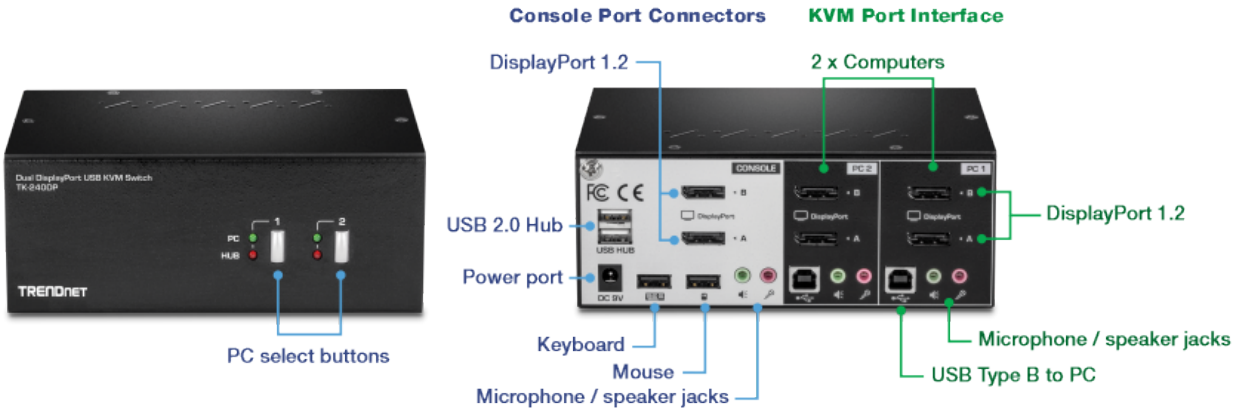

FEATURES

Computers
Control up to 2 computers

4K UHD
Supports resolutions up to 4K UHD (3840 x 2160 @ 60Hz)

Audio Support
Full audio support maximizes work station productivity

USB Mouse & Keyboard
True Transparent USB (TTU) emulation technology supports most keyboard and mouse designs

DisplayPort Monitor
Designed to connect to two DisplayPort monitors

Housing
Rugged metal enclosure

USB 2.0 Hub
Two additional USB ports to connect storage drives and printers

Hot Keys
Hot Key command shortcuts

SPECIFICATIONS

Console Port Connectors
- Keyboard: USB Type A
- Mouse: USB Type A
- Monitors: 2 x DisplayPort 1.2
- 2-port USB 2.0 Hub
- Speaker jack: 3.5mm
- Microphone jack: 3.5mm

KVM Port Interface (up to 2)
- Keyboard/Mouse: USB Type B
- Monitors: 2 x DisplayPort 1.2
- Speaker jack: 3.5mm
- Microphone jack: 3.5mm

Computer Interface (up to 2)
- Keyboard/Mouse: USB Type A
- Monitors: 2 x DisplayPort 1.2
- Speaker jack: 3.5mm
- Microphone jack: 3.5mm

Monitor Resolution
- Up to 1920 x 1080 @ 144Hz
- Up to 1920 x 1200 @ 144Hz
- Up to 1920 x 1440 @ 144Hz
- Up to 2560 x 1440 @ 144Hz
- Up to 3440 x 1440 @ 60Hz
- Up to 3840 x 2160 @ 60Hz

Switching Control
- Front panel push buttons
- Keyboard hot key commands

Operating Temperature
- 0° – 40° C (32° – 104° F)

Operating Humidity
- Max. 90% non-condensing

Power
- Input: 100 – 240V AC, 50/60Hz, 0.8A
- Output: 9V DC, 2A external power adapter
- Max. consumption: 0.7W

Dimensions
- 163 x 100 x 66mm (6.4 x 3.9 x 2.6 in.)

Weight
- 750g (1.65 lbs.)

Certifications
- CE
- FCC

Warranty
- 2 year

Package Contents
- TK-240DP
- Quick Installation Guide
- Power adapter (9V DC, 2A)

20675 Manhattan Place • Torrance • CA 90501 • USA • T: 1-888-326-6061 • F: 1-310-961-5511 • sales@trendnet.com • www.TRENDnet.com

TRENDnet is a registered trademark. Other Brands and product names are trademarks of their respective holders. Information provided in this document pertain to TRENDnet products and is subject to change at any time, without notice. For the most recent product information please visit http://www.trendnet.com. Copyright © TRENDnet. All Rights Reserved.

Updated: 2/01/2026