





4-Port Rack Mount KVM Switch TK-401R

TRENDnet's TK-401R 4-Port KVM Switch allows you to manage up to 4 PCs with just one keyboard, monitor, and mouse. Switch between multiple PCs with a simple press of a button! Eliminate the hassle of cable swapping. Save money and space with the TK-401R. This KVM Switch also comes with a rack-mount kit for mounting on EIA-19" rack in the equipment room and computer lab. Rich in features such as Hot-Plug, Auto-Scan, and Hot-Key operations; TRENDnet TK-401R is the perfect choice for managing multiple Pcs.

- FEATURES Support Microsoft Intellimouse, Microsoft Intellimouse Explorer, Logitech NetMouse, Optical Mouse, and other MS compatible
 - PS/2 Keyboard/Mouse emulation
 - Support DOS, Windows 3.x/95/98/ME/NT/2000/XP, Netware, Unix, Linux, and more
 - Very high video quality up to 1920 x 1440 resolution and 200Mhz bandwidth
 - No software required easy PC selection via Push Buttons and Hot-Key Operation
 - Hot-Plug feature add or remove PC's without powering off the KVM switch or other Pc's
 - Auto-Scan Mode for monitoring PCs, with configurable scan interval from 5~99 seconds
 - Keyboard status restored when switching between Pcs
 - LED Display for easy status monitoring
 - Beeping sound for port switching confirmation
 - EIA-19" rack-mountable (hardware included)
 - 2-Year Warranty

BENEFITS

Integration Friendly:

Does not require driver/software for the installation and operation. Switching between PC's with the Push Buttons and Hot-Key operations.

Flexible:

Hot-Plug feature – add PC's or remove connected PC's without powering off the KVM Switch or the other PC's.

Cost Effective:

Manage multiple PC's with single keyboard, monitor, and mouse. Save on equipment cost, utility, and space.

Performance:


Support very High Video Quality up to 1920 x 1440 with 200Mhz bandwidth. Keyboard status is saved for each PC.

4-Port Rack Mount KVM Switch TK-401R

SPECIFICATIONS

Hardware	
Computer Port	4 ports: Keyboard and Mouse: PS/2 type mini Din 6-pin (female)
	VGA: HDDB 15-pin (female)
Console Port	1 port: Keyboard and Mouse: PS/2 type mini Din 6-pin (female)
	VGA: HDDB 15-pin (female)
PC Selection	Hot-Keys and Push Buttons
LED Segment	Two LED indicators per port (PC Link green and PC Active red)
Auto-Scan Interval	• 5 ~ 99 seconds
Keyboard State	Saved and restored
Video Bandwidth	• 200MHz
Power Adapter (Optional)	External AC Power adapter, 12V DC, 1A (or 9V DC, 1A)
Dimensions	• 220 x 100 x 44.5 mm (8.7 x 4 x 1.77 inches)
Weight	Approximately 1 Kg. (2.2 lbs)
Temperature	• Operating: 0°~ 40°C (32°~ 104°F)
	• Storage: -20°~ 60°C (-4°~ 140°F)
Operating Humidity	• 0%~80% (non-condensing)
Certifications	• FCC, CE

NETWORKING SOLUTIONS

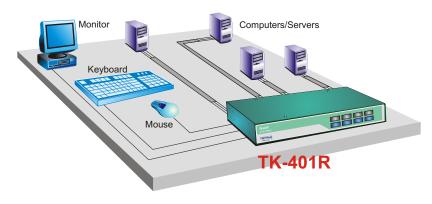

RELATED PRODUCTS

TK-401R	4-Port Rack Mount KVM Switch
TK-801R	8-Port Rack Mount KVM Switch
TK-200	2-Port KVM Switch Kit
TK-200K	2-Port KVM Switch Kit
TK-400	4-Port KVM Switch
TK-400K	4-Port KVM Switch Kit
TK-800R	8-Port Rack Mount KVM Switch
TK-C06	6 Feet KVM Cable (male-to-male)
TK-C10	10 Feet KVM Cable (male-to-male)

ORDERING INFORMATION

TRENDNET

3135 Kashiwa Street, Torrance, CA 90505 USA

Tel: 1-310-891-1100 Fax: 1-310-891-1111 Web: www.trendnet.com Email: sales@trendnet.com

To Order Please Call:

1-888-326-6061

