



TK-403KR 4-Port KVM Switch

TRENDnet's TK-403KR 4-port KVM encompasses all your multimedia and multitasking needs into one cost effective solution. Manage multiple PC's effectively while enjoy audio-rich features with one set of monitor, keyboard, mouse, microphone, and speakers.



FEATURES

- 4-Port PS/2 Audio KVM Switch with Audio and Microphone switching
- PS/2 style keyboard and mouse control
- Simultaneous/Independent Switching of Audio-Microphone and PC channel
- Supports Microsoft IntelliMouse, IntelliMouse Explorer, Logitech NetMouse and more
- Additional advanced support for High-End Logitech Wired/Wireless/Optical Mice
- High Quality of up to 2048 x 1536 VGA Resolution
- Direct Channel Selection and Operation using Push Buttons or Hot-Key Commands
- Mouse Reset Hot-Key Support for non-PnP OS such as WinNT 4.0 and Linux
- Auto-Scan Mode for monitoring PCs and Beeping Sound for Switching Confirmation
- Supports DOC, Windows 95/98(SE)/ME/2000/XP, Linux and more
- Plug & Play and Hot-Pluggable
- EIA-19" (1U) Rack-Mountable (kit included)
- 2-Year Warranty

BENEFITS

- **Integration Friendly:**
Does not require driver/software for the installation and operation. Switch between PCs with the push button or Hot-Key operation.
- **Flexible:**
Hot-Plug feature, add PCs or remove connected PCs without powering off the KVM switch or the other PCs.
- **Cost Effective:**
Manage two PCs with single keyboard, monitor, mouse and speakers/microphone. Save on equipment cost, utility, and space.
- **Performance:**
Support High Quality 2048 x 1536 resolution



TK-403KR

4-Port KVM Switch

SPECIFICATIONS

PC Port Connector:

- 4 x PS/2 Keyboard 6-pin Mini Din (Female) + Audio
- 4 x PS/2 Mouse 6-pin Mini Din (Female) + Microphone
- 4 x VGA HDB 15-pin (Female)

Console Ports Connector:

- 1 x PS/2 Keyboard 6-pin Mini Din (Female)
- 1 x PS/2 Mouse 6-pin Mini Din (Female)
- 1 x VGA HDB 15-pin (Female)
- 1 x 3.5mm Audio in/out jack
- 1 x 3.5mm Microphone in/out jack

PC Selection:

- Push Buttons or Hot-Key Commands

Auto Scan Intervals:

- 5~100 seconds (default 5 seconds)

Keyboard/Mouse Emulation:

- PS/2

Cable:

- 4 sets of Audio KVM Cable (1.8m/6ft)
To KVM
- PS/2 Keyboard 6-pin Mini Din (Male)
- PS/2 Mouse 6-pin Mini Din (Male)
- VGA HDB 15-pin (Male)
To PC
- PS/2 Keyboard 6-pin Mini Din (Male)
- PS/2 Mouse 6-pin Mini Din (Male)
- VGA HDB 15-pin (Male)
- Audio connector (Male)
- Microphone connector (Male)

Display Resolution:

- 2048 x 1536

Power:

- Bus-Powered,
Optional Adapter : 9V DC, 500mA
(not included)

Dimensions:

- 255 x 117.5 x 45mm
(10 x 4.6 x 1.8 inches)

Weight:

- 1000 g (35.2 oz.)

Temperature:

- Operating: 0° ~ 40°C (32° ~ 104° F);
Storage: -20° ~ 60°C (-4° ~ 140° F)

Humidity:


- 0%~90% RH, Non-Condensing

Certifications:

- FCC, CE



NETWORKING SOLUTIONS

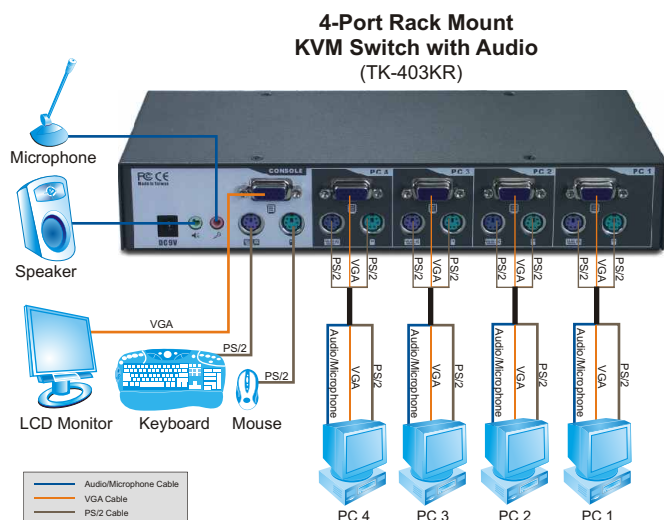

To Order Please Call:
1-888-326-6061

RELATED PRODUCT

- TK-206i: 2-Port USB KVM Switch
- TK-209i: 2-Port USB and PS/2 KVM Switch with Audio
- TK-210K: 2-Port USB and PS/2 KVM Switch with Audio

ORDERING INFORMATION

TRENDware International, Inc.
3135 Kashiwa Street
Torrance, CA. 90505. USA
Tel: 310-891-1100
Fax: 310-891-1111
Web: www.TRENDNET.com
Email: sales@trendware.com

