



4-Port USB KVM Switch Kit w/ Audio TK-409K (v1.2R)

The 4-Port USB KVM Switch with Audio lets you manage 4 computers with just one set of keyboard, monitor, mouse, and a set of speakers/Microphone. The device comes with 4 sets of USB KVM and Audio cables, no additional equipment required. Its compact size makes it ideal for home and business environment.

FEATURES

- Manage up to 4 computers/servers with one set of console device
- USB keyboard/mouse emulation with 4 sets of detachable KVM cables
- Compliant with Windows 98(SE)/ME/2000/XP/2003 Server/Vista, Linux, and Mac OS
- High video quality, up to 2048 x 1536 VGA resolution
- Multi-Platform supports for PCs, Macintosh G3/G4/G5, iMac and Mac Mini
- Listen to music from one computer while working on the other
- Auto-Scan & LED display for computer monitoring
- Computer selection by face panel push buttons, keyboard hot key commands or Windows-based client switching software
- User definable hot key (Windows only)
- Plug & Play and hot-pluggable
- USB interface power method
- 2-year limited warranty



SPECIFICATIONS

HARDWARE


Connections	<ul style="list-style-type: none">• 4 computers
USB Interface	<ul style="list-style-type: none">• USB 1.1 compliant
KVM Cable	<ul style="list-style-type: none">• 2 sets of 1.2m (4ft.) KVM cables, 2 sets of 1.2m (4ft.) audio cables• 2 sets of 1.8m (6ft.) KVM cables, 2 sets of 1.8m (6ft.) audio cables
Cable Interface (all male)	<ul style="list-style-type: none">• To KVM<ul style="list-style-type: none">• 1 x VGA/SVGA HDB 15-pin• 1 x 3.5mm speaker jack• 1 x 3.5mm microphone in jack• To Computer<ul style="list-style-type: none">• 1 x USB (type A)• 1 X VGA/SVGA HDB 15-pin• 1 x 3.5mm speaker jack• 1 x 3.5mm microphone jack
PC Port Connectors (all female)	<ul style="list-style-type: none">• 4 x VGA/SVGA HDB 15-pin• 4 x 3.5mm speaker jack• 4 x 3.5mm microphone jack
Console Port Connectors (all female)	<ul style="list-style-type: none">• 1 x USB Keyboard (type A)• 1 x USB Mouse (type A)• 1 x VGA/SVGA HDB 15-pin• 1 x 3.5mm speaker jack• 1 x 3.5mm microphone jack
Computer Selection	<ul style="list-style-type: none">• Face panel push buttons, keyboard hot key commands or Windows-based client switching software
Auto-Scan Interval	<ul style="list-style-type: none">• 10 ~ 60 seconds
Power Type	<ul style="list-style-type: none">• USB interface power
Dimensions	<ul style="list-style-type: none">• 167 x 80 x 28mm (6.6 x 3.2 x 1.1in.)
Weight	<ul style="list-style-type: none">• 185g (6.5oz.)
Temperature	<ul style="list-style-type: none">• Operating: 0°C ~ 40°C (32°F ~104°F)• Storage: -20°C ~ 60°C (-4°F ~140°F)
Humidity	<ul style="list-style-type: none">• 0%~90%, non-condensing
Certifications	<ul style="list-style-type: none">• CE, FCC

4-Port USB KVM Switch Kit w/ Audio

TK-409K [v1.2R]



NETWORKING SOLUTIONS

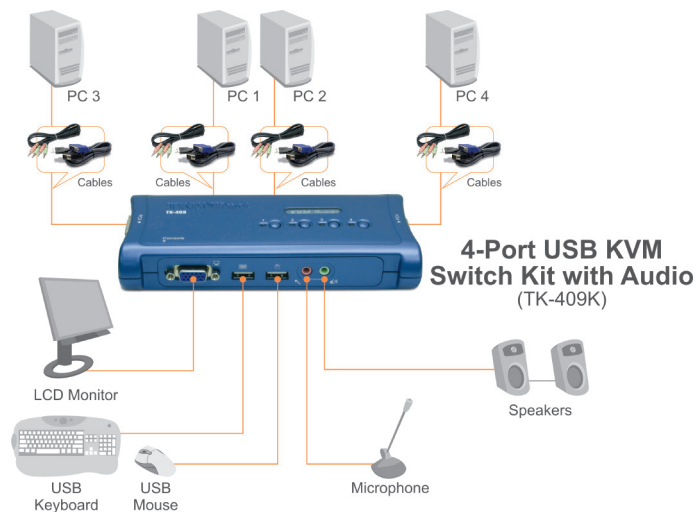

PACKAGE CONTENTS

TK-409K

Multi-Language Quick Installation Guide

CD-ROM (Utility)

4 sets of USB KVM Cables (2 x 1.2m/4ft., 2 x 1.8m/6ft.)

4 sets of Audio Cables (2 x 1.2m/4ft., 2 x 1.8m/6ft.)

RELATED PRODUCTS

TK-209K	2-Port PS/2 KVM Switch Kit w/ Audio
TK-407K	4-Port USB KVM Switch Kit
TK-408K	4-Port PS/2 KVM Switch Kit with Audio

CONTACT INFORMATION

TRENDnet

20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500

Fax: 1-310-961-5511

Web: www.trendnet.com

Email: sales@trendnet.com

1-888-326-6061

