




## 4-Port Dual Monitor DisplayPort KVM Switch

TK-440DP (v3.0R)

- Dual Monitor DisplayPort™ 1.2 KVM
- 3.5mm speaker and microphone connections
- Designed for use with Dual DisplayPort systems
- Supports 4K UHD resolutions up to 3840 x 2160 @ 60Hz
- Up to 2560 x 1440 @ 144Hz
- 2-Port USB 2.0 hub for storage devices and printers
- Required cabling sold separately (TK-CP06)
- No CD installation required

TRENDnet's 4-Port Dual Monitor DisplayPort KVM Switch, model TK-440DP, allows you to control four computers with one set of console controls. Experience up to 4K UHD resolutions, no driver installation required. The TK-440DP is designed for dual monitor systems with USB mouse and keyboard connections, and features a two-port USB hub to share storage devices or printers between computers.

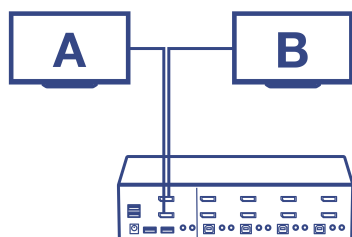

## Dual Monitor

Designed to connect to two DisplayPort monitors.



## 4K UHD Resolution



Supports resolutions up to 4K UHD (3840 x 2160 @ 60Hz).




## USB 2.0 Hub

Two additional USB ports to connect storage drives and printers.

## NETWORKING SOLUTION

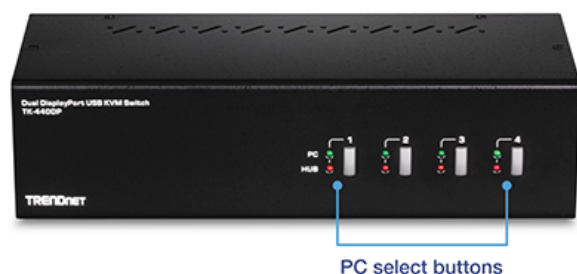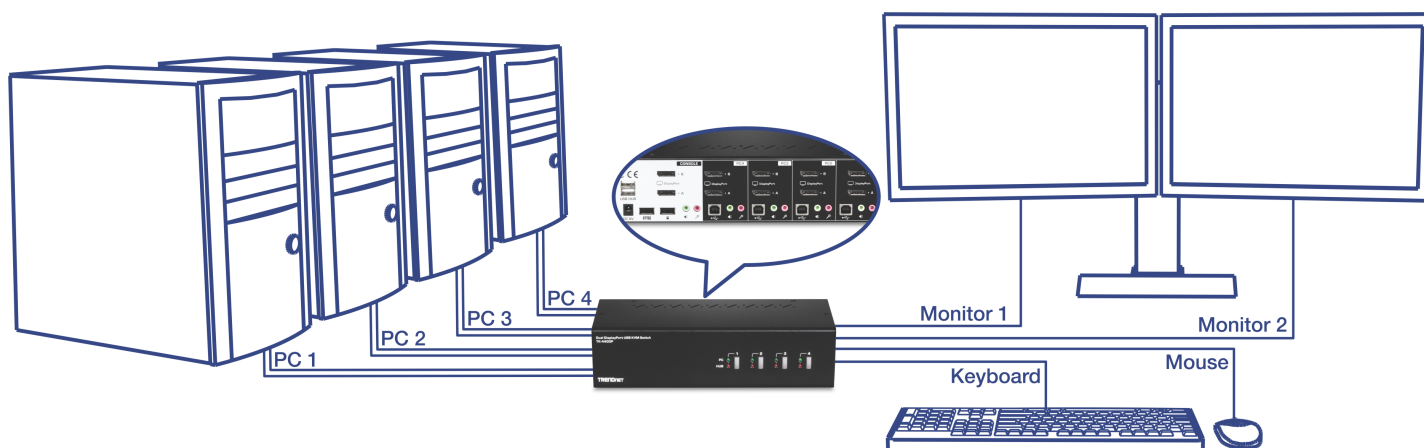

PC select buttons

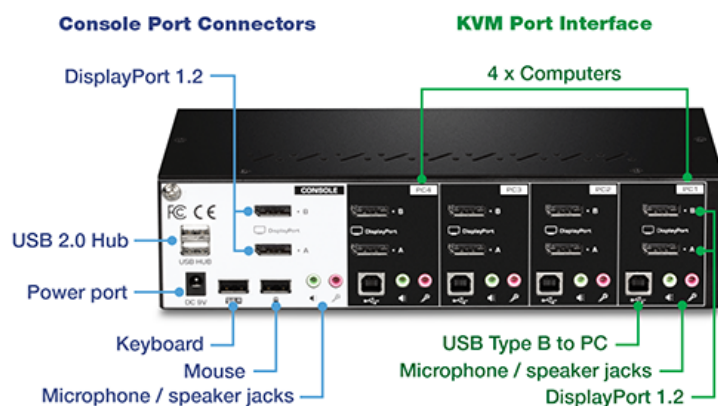

### Console Port Connectors

### KVM Port Interface

DisplayPort 1.2  
USB 2.0 Hub  
Power port  
Keyboard  
Mouse  
Microphone / speaker jacks  
4 x Computers  
USB Type B to PC  
Microphone / speaker jacks  
DisplayPort 1.2

## FEATURES



### 4-Port Dual Monitor KVM

Control up to four computers with dual monitor support



### DisplayPort Monitor

Designed to connect to two DisplayPort monitors



### 4K UHD

Supports resolutions up to 4K UHD (3840 x 2160 @ 60Hz)



### Audio Support

Full audio support maximizes work station productivity



### USB Mouse & Keyboard

True Transparent USB (TTU) emulation technology supports most keyboard and mouse designs



### Housing

Rugged metal enclosure



### USB 2.0 Hub

Two additional USB ports to connect storage drives and printers



### Hot Keys

Hot Key command shortcuts



### Easy Installation

Simple setup with driverless installation

## SPECIFICATIONS

### Console Port Connectors

- Keyboard: USB Type A
- Mouse: USB Type A
- Monitors: 2 x DisplayPort 1.2
- 2-port USB 2.0 Hub
- Speaker jack: 3.5mm
- Microphone jack: 3.5mm

### KVM Port Interface

- Keyboard/Mouse: USB Type B
- Monitors: 2 x DisplayPort 1.2
- Speaker jack: 3.5mm
- Microphone jack: 3.5mm

### Computer Interface (up to 4)

- Keyboard/Mouse: USB Type A
- Monitors: 2 x DisplayPort 1.2
- Speaker jack: 3.5mm
- Microphone jack: 3.5mm

### Monitor Resolution

- Up to 1920 x 1080 @ 144Hz
- Up to 1920 x 1200 @ 144Hz
- Up to 1920 x 1440 @ 144Hz
- Up to 2560 x 1440 @ 144Hz
- Up to 3440 x 1440 @ 60Hz
- Up to 3840 x 2160 @ 60Hz

### Switching Control

- Front panel push buttons
- Keyboard hot key commands

### Operating Temperature

- 0° – 40° C (32° – 104° F)

### Operating Humidity

- Max. 90% non-condensing

### Power

- Input: 100 – 240V AC, 50/60Hz, 0.8A
- Output: 9V DC, 2A external power adapter
- Max. consumption: 0.7W

### Dimensions (L x W x H)

- 254 x 100 x 66mm (10 x 3.9 x 2.6 in.)

### Weight

- 1.2kg (2.7 lbs.)

### Warranty

- 2 year

### Certifications

- CE
- FCC

### Package Contents

- TK-440DP
- Quick Installation Guide
- Power adapter (9V DC, 2A)