



## 8-Port Rack Mount KVM Switch TK-801R

TRENDnet's TK-801R 8-Port KVM Switch allows you to manage 8 PC's with just one keyboard, monitor, and mouse. Switch between PC's with a simple press of a button! Eliminate the hassle of cable swapping and save money and space with TRENDnet's TK-801R. With its rack-mount size and slim one unit height, it is perfect for mounting on EIA-19" rack in the Equipment Room and Computer Lab. Rich in features such as, Hot-Plug, Auto-Scan, and Hot-Key Operation, TRENDnet's TK-801R is the perfect choice for managing multiple Pc's.

### FEATURES

- Support Microsoft Intellimouse, Microsoft Intellimouse Explorer, Logitech NetMouse, Optical Mouse, or other fully compatible MS Mouse
- PS/2 Keyboard/Mouse emulation
- Support DOS, Windows 3.x/95/98/ME/NT/2000/XP, Netware, Unix, Linux, and more
- Very high video quality – up to 1920 x 1440 resolution and 200Mhz bandwidth
- No software required – easy PC selection via Push Buttons and Hot-Key Operation
- Hot-Plug feature – add or remove PC's without powering off the KVM switch or other Pc's
- Auto-Scan Mode for monitoring PCs, with configurable scan interval from 5~99 seconds
- Keyboard status restored when switching Pcs
- LED Display for easy status monitoring
- Beeping sound for port switching confirmation
- EIA-19" rack-mountable (hardware included)
- 2-Year Warranty

### BENEFITS

#### **Integration Friendly:**

Does not require driver/software for the installation and operation. Switching between PC's with the Push Buttons and Hot-Key operations.

#### **Flexible:**

Hot-Plug feature – add PC's or remove connected PC's without powering off the KVM Switch or the other PC's.

#### **Cost Effective:**

Manage multiple PC's with single keyboard, monitor, and mouse. Save on equipment cost, utility, and space.

#### **Performance:**

Support very High Video Quality up to 1920 x 1440 with 200Mhz bandwidth. Keyboard status is saved for each PC.


# 8-Port Rack Mount KVM Switch

## TK-801R

### SPECIFICATIONS

Hardware	
Computer Port	<ul style="list-style-type: none"> <li>• 8 ports</li> <li>• Keyboard and Mouse: PS/2 type mini Din 6-pin (female)</li> <li>• VGA: HDBB 15-pin (female)</li> </ul>
Console Port	<ul style="list-style-type: none"> <li>• 1 port</li> <li>• Keyboard and Mouse: PS/2 type mini Din 6-pin (female)</li> <li>• VGA HDBB 15-pin (female)</li> </ul>
PC Selection	<ul style="list-style-type: none"> <li>• Hot-Keys and Push Buttons</li> </ul>
LED Segment	<ul style="list-style-type: none"> <li>• Two LED indicators per port - PC Link (green) and PC Active (red)</li> </ul>
Auto-Scan Interval	<ul style="list-style-type: none"> <li>• 5~99 seconds</li> </ul>
Keyboard State	<ul style="list-style-type: none"> <li>• Saved and restored</li> </ul>
Video Bandwidth	<ul style="list-style-type: none"> <li>• 200MHz</li> </ul>
Power Adapter (Optional)	<ul style="list-style-type: none"> <li>• External AC Power adapter, 12VDC, 1A (or 9VDC, 1A)</li> </ul>
Dimensions	<ul style="list-style-type: none"> <li>• 410 x 165 x 45 mm (16.14 x 6.5 x 1.77 inches)</li> </ul>
Weight	<ul style="list-style-type: none"> <li>• Approximately 2.2 Kg. (4.85 lbs)</li> </ul>
Temperature	<ul style="list-style-type: none"> <li>• Operating: 0°~40°C (32°~ 104°F)</li> <li>• Storage: -20°~60°C (-4°~ 140°F)</li> </ul>
Operating Humidity	<ul style="list-style-type: none"> <li>• 0~80%, Non-Condensing</li> </ul>
Certifications	<ul style="list-style-type: none"> <li>• FCC, CE</li> </ul>

### NETWORKING SOLUTIONS

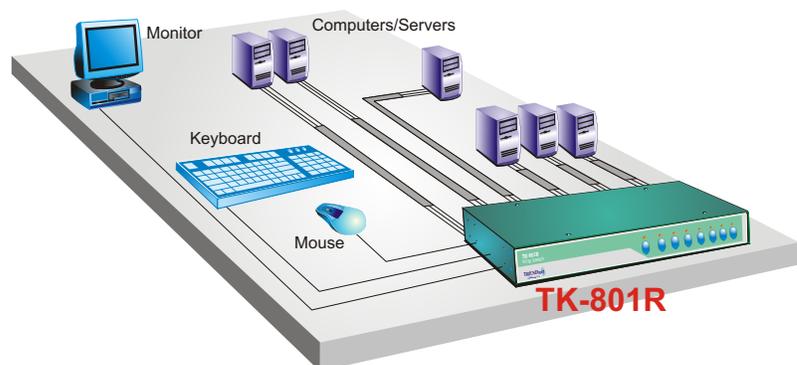

### RELATED PRODUCTS

TK-802R	8-Port Stackable Rack Mount KVM Switch with OSD
TK-801R	8-Port Rack Mount KVM Switch
TK-200K	2-Port KVM Switch Kit
TK-400K	4-Port KVM Switch Kit
TK-401R	4-Port Rack Mount KVM Switch
TK-C06	6 Feet KVM Cable (male-to-male)
TK-C10	10 Feet KVM Cable (male-to-male)

### ORDERING INFORMATION

**TRENDnet**

20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500

Fax: 1-310-961-5511

Web: [www.trendnet.com](http://www.trendnet.com)

Email: [sales@trendnet.com](mailto:sales@trendnet.com)

To Order Please Call:

**1-888-326-6061**

