



Firmware Upgrade Procedure

1. Save the downloaded firmware file (.zip) to your PC
2. Right click on the downloaded file and select **Extract All** or **Extract Here** option
 - a. Make sure to remember the location where the extracted file will be saved.
3. Log into to the switch configuration page
Default URL/IP address <http://192.168.10.200>
Default User Name: admin Default Password: admin
4. Navigate to the **Tools** section, click on **Firmware Upgrade** and select the **via HTTP** option.
5. Click **Upgrade** and wait for the timer to complete.

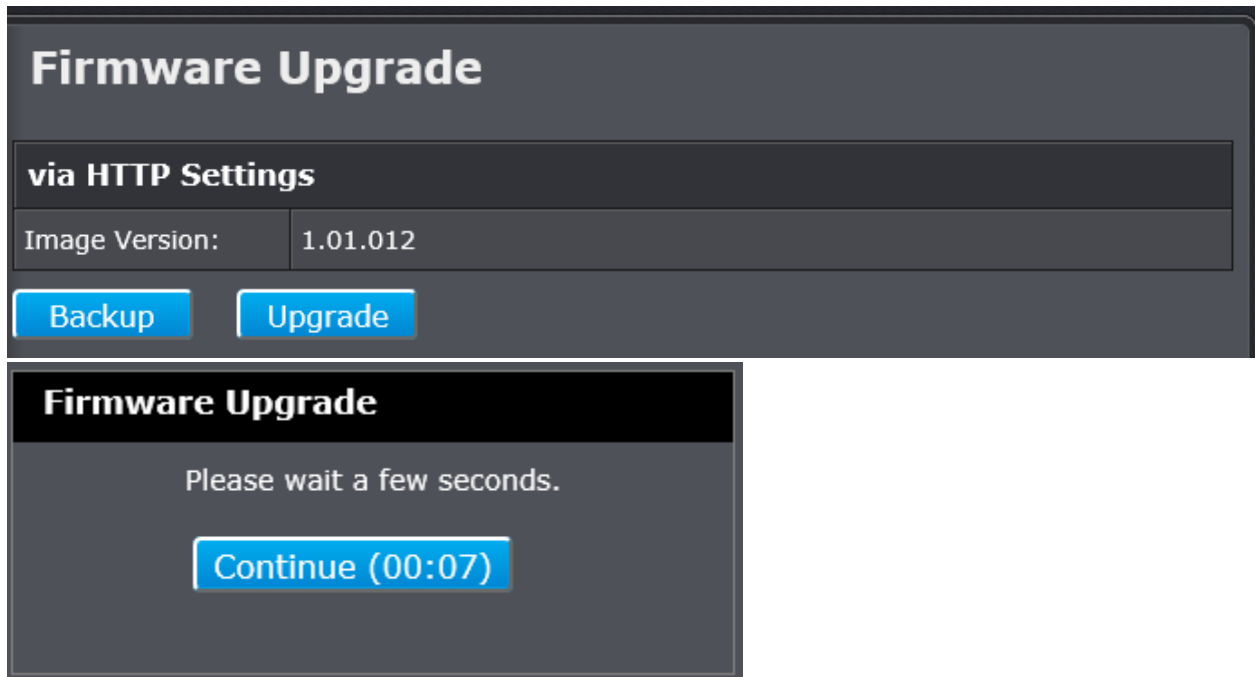

The screenshot shows the 'Firmware Upgrade' page with the 'via HTTP Settings' tab selected. It displays the 'Image Version' as '1.01.012'. Below this, there are two buttons: 'Backup' and 'Upgrade'. A modal dialog box is open in the foreground, titled 'Firmware Upgrade', with the text 'Please wait a few seconds.' and a 'Continue (00:07)' button.

6. At the Firmware Upgrade page, click **Browse** and select firmware file (.bin) from the extracted files and click the **Upgrade** button to start the firmware upgrade process.

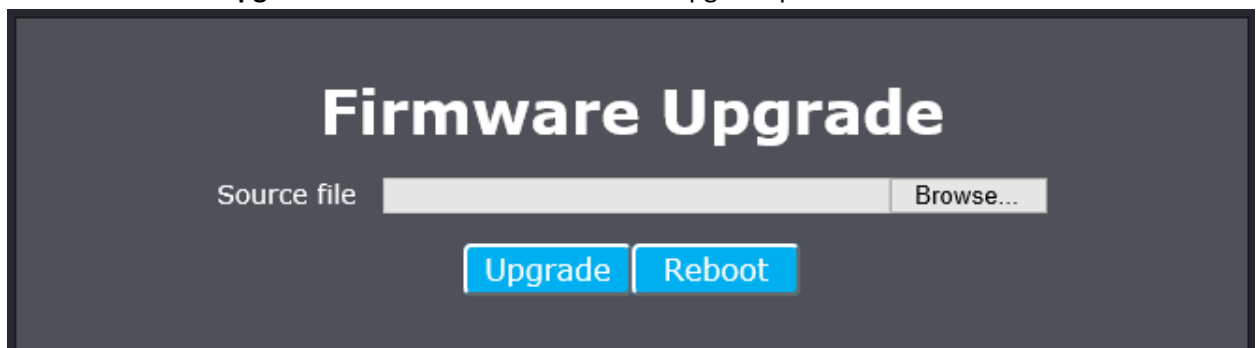

The screenshot shows the 'Firmware Upgrade' page with the 'Source file' field and a 'Browse...' button. Below these are two buttons: 'Upgrade' and 'Reboot'.

7. Wait until the firmware upload has completed and the device reboots.
8. The firmware upgrade is complete.