



TRENDnet 7-Port Multi-Gig PoE+ Switch, 5 x 1G RJ-45 PoE+ BASE-T Ports, 2 x 2.5G RJ-45 PoE+ Ports, 20Gbps Switching Capacity, Wall Mountable, Network Ethernet Switch, Lifetime Protection, Black, TPE-TG327

TPE-TG327 (v1.0R)


- DEVICE INTERFACE: 5 x Gigabit PoE+ ports; 2 x 2.5GBASE-T PoE+ ports (10Mbps/100Mbps/1Gbps/2.5Gbps); LED Indicators
- 2.5G PORTS: This 7 Port Multi-Gig PoE+ Ethernet switch is equipped with two 2.5GBASE-T RJ-45 ports that provide multi-gigabit speeds capable of up to 2.5Gbps over existing Cat5e or better cabling.
- POE: The PoE+ switch has 5 x Gigabit RJ-45 ports with a 70W PoE power budget
- FANLESS DESIGN: The compact fanless design of the 2.5G network switch lowers energy consumption costs and eliminates operating noise
- EASY INSTALLATION: No configuration needed, simply connect network devices to the Gigabit PoE+ Ethernet switch
- SWITCHING CAPACITY: 20Gbps switching capacity
- COMPATABILITY: 2.5G ports are backwards compatible with 100/1000Mbps devices and the switch is compatible with existing Cat5e or better cabling.
- WALL MOUNTABLE: Features a convenient wall mountable design for greater installation flexibility
- LIFETIME PROTECTION: TRENDnet LIFETIME PROTECTION: The TPE-TG327 multi-gig PoE+ switch comes with Lifetime TRENDnet Manufacturer Protection. Renewed or refurbished products come with a 90 day Amazon Renewed Guarantee.
- Lifetime Warranty
- NDAA / TAA compliant (U.S. and Canada only)

TRENDnet's 7-Port Multi-Gig PoE+ Switch, model TEG-TG327, is an affordable 2.5G PoE+ switch that provides advanced high-bandwidth performance, ease of use, and reliability. The TEG-TG327 multi-gig switch offers two dedicated 2.5G PoE+ ports and five dedicated 1G PoE+ ports for high-speed network connections with a 20Gbps switching capacity. Having a sturdy compact metal housing and fanless design, the multi-gig PoE+ switch is a cost-effective solution for high-speed network connections. A 70W total PoE power budget on this affordable multi-gig PoE+ switch supplies up to seven PoE+ devices with up to 30W per port.









2.5G Ports

Equipped with two 2.5GBASE-T RJ-45 PoE+ ports that provide multi-gigabit speeds capable of up to 2.5Gbps over existing Cat5e or better cabling.


Fanless

Convenient fanless design lowers power consumption and energy costs, and eliminates distracting operating noise.

Wall Mountable

Well-suited for desktop installations, but also features a convenient wall-mountable design for greater installation flexibility.

NETWORKING SOLUTION

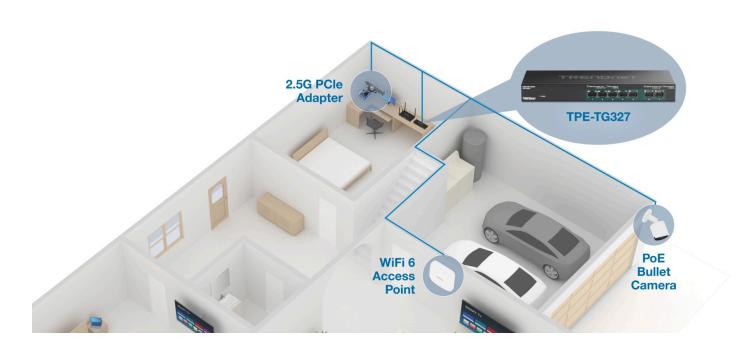



FEATURES



Network Ports

Provides 5 x 1G PoE+ ports and 2 x 2.5G PoE+ ports for high-speed network connections



2.5G PoE+ Ports

Connect 2.5GBASE-T supported devices at 2.5Gbps for increased throughput over existing Cat5e or better cabling



Fanless

Fanless design on this 2.5G PoE switch lowers energy consumption and eliminates operating noise



Jumbo Frame

Sends larger packets, or Jumbo Frames (up to 15KB) for increased performance



Housing Design

Sturdy metal housing on this affordable 2.5G PoE+ switch is also compact and lightweight




Wall Mountable

Well-suited for desktop installations, but also features convenient-wall mountable design for greater installation flexibility



LED Indicators

LED indicators conveniently convey port status on this affordable 2.5G PoE+ switch

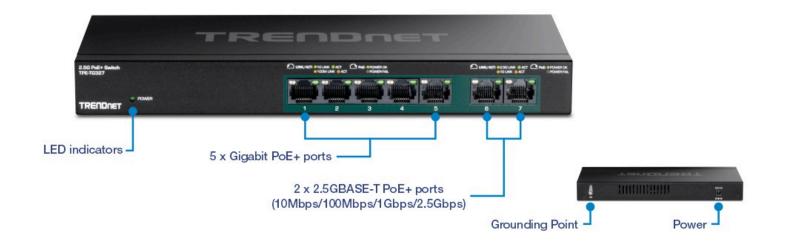



SPECIFICATIONS

Standards

- IEEE 802.3x
- IEEE 802.3z
- IEEE 802.3ab
- IEEE 802.3af
- IEEE 802.3at
- IEEE 802.3bz

Device Interface

- 5 x Gigabit PoE+ ports
- 2 x 2.5GBASE-T PoE+ ports (1Gbps/2.5Gbps)
- LED indicators

Data Transfer Rate

- · Gigabit: 2000Mbps (full duplex)
- 2.5 Gigabit: 5Gbps (full duplex)

Performance

- Data RAM Buffer: 384KBSwitch Capacity: 20Gbps
- MAC Address Table: 2K entries
- Forwarding rate: 14.88Mpps (64-byte packet size)
- · Jumbo Frame: 15KB

Special Features

- Wall mountable
- Fanless

Power

- Input: 100 240V AC, 50/60Hz
- Output: 55V/1.67A
- Max. consumption: 8W (no PD)

PoE

- PoE budget: 70W
- PoE Mode A: Pins 1, 2, 3, and 6 for power
- Over current protection
- Short circuit protection

MTBF

• 830,917 hours

Operating Temperature

• 0° – 50° C (32° – 122° F)

Operating Humidity

• Max. 90% non-condensing

Dimensions

• 286 x 102 x 27mm (11.3 x 4 x 1 in.)

Weight

• 0.9kg (2 lbs.)

Certifications

- CE
- FCC

Warranty

Lifetime

Package Contents

- TPE-TG327
- Quick Installation Guide
- Power brick (55V, 1.67A)
- Power cord (1.8m /6 ft.)

All references to speed are for comparison purposes only. Product specifications, size, and shape are subject to change without notice, and actual product appearance may differ from that depicted herein.

TRENDnet offers a lifetime warranty for all of its metal-enclosed network switches that have been purchased in the United States/Canada on or after 1/1/2015. Cooling fan and internal power supply carry a one-year warranty.