






## 5-Port Unmanaged 2.5G PoE+ Switch

TPE-TG350 (v1.0R)

- 5 x 2.5GBASE-T ports
- 55W PoE power budget
- IEEE 802.3bz (2.5G) compliant
- Supports IEEE 802.3at/af PoE standards
- Backwards compatible with 10/100/1000Mbps devices
- 25Gbps switching capacity
- Fanless design eliminates noise
- Wall mountable for installation flexibility

Expand your network's bandwidth and reduce traffic bottlenecks with TRENDnet's Unmanaged 2.5G PoE+ Switches. These 2.5G PoE+ switches come equipped with 2.5GBASE-T RJ-45 ports that provide higher gigabit speeds capable of up to 2.5Gbps over your existing Cat5e or better cabling. Each high-speed 2.5G PoE+ switch features a durable metal enclosure and can be mounted to the wall for setup flexibility. The fanless design lowers energy consumption and eliminates distracting operating noise. TRENDnet's reliable 2.5G PoE+ switches are cost-effective solutions to increase your network's throughput. A 55W total PoE power budget on this PoE+ switch supplies up to four PoE+ devices with up to 30W per port.



### 2.5G Ports

Equipped with 2.5GBASE-T RJ-45 ports that provide higher gigabit speeds capable of up to 2.5Gbps over existing Cat5e or better cabling.



### Wall Mountable

The 2.5G PoE+ switches feature a metal housing with a convenient wall mountable design for greater installation flexibility.

### PoE+

A 55W total PoE power budget on this PoE+ switch supplies up to four PoE+ devices with up to 30W per port.

## NETWORKING SOLUTION

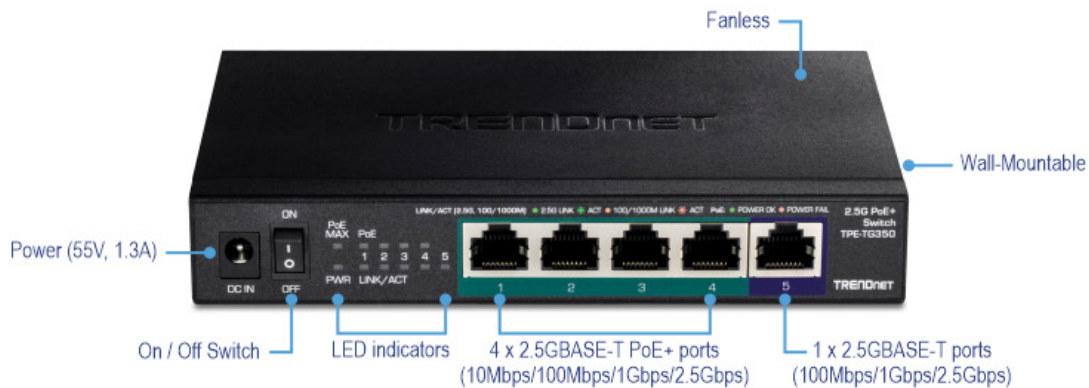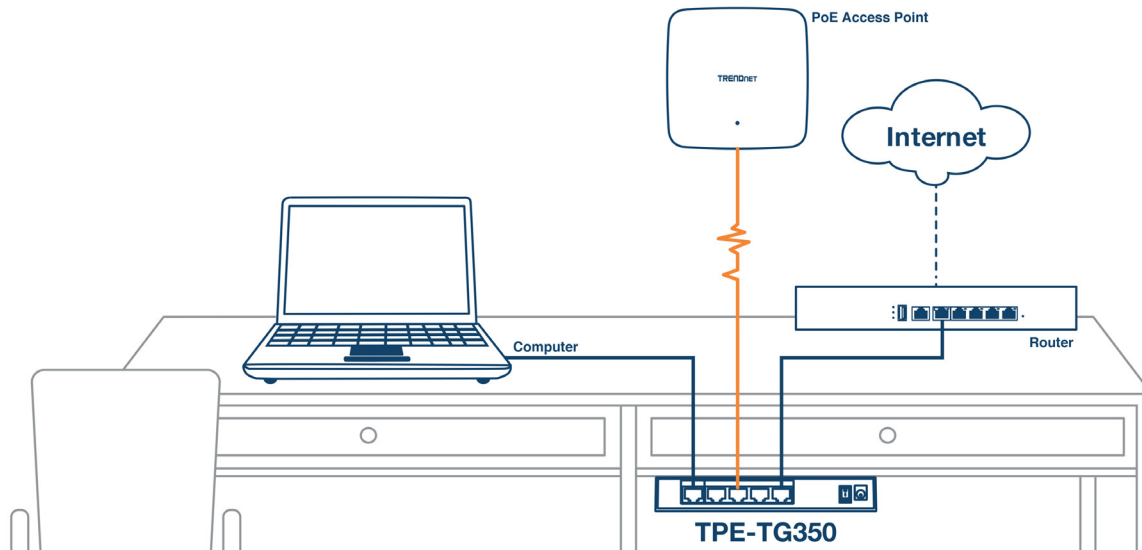

## FEATURES



### Easy Installation

No configuration needed, simply connect network devices to the 2.5G PoE+ switch



### PoE+

A 55W total PoE power budget supplies up to four PoE+ devices with up to 30W per port



### 2.5G Ports

Equipped with 2.5GBASE-T RJ-45 ports that provide higher gigabit speeds capable of up to 2.5Gbps over existing Cat5e or better cabling



### Fanless

Fanless design lowers energy consumption and eliminates operating noise



### Housing Design

Sturdy metal housing



### Wall Mountable

Features a convenient wall mountable design for greater installation flexibility



### Jumbo Frame

Sends larger packets, or Jumbo Frames (up to 12KB) for increased performance



### LED Indicators

LED indicators convey port status

## SPECIFICATIONS

### Standards

- IEEE 802.3
- IEEE 802.3u
- IEEE 802.3x
- IEEE 802.3z
- IEEE 802.3ab
- IEEE 802.3af
- IEEE 802.3at
- IEEE 802.3bz

### Device Interface

- 4 x 2.5GBASE-T PoE+ ports (10Mbps/100Mbps/1Gbps/2.5Gbps)
- 1 x 2.5GBASE-T ports (100Mbps/1Gbps/2.5Gbps)
- LED indicators

### Data Transfer Rate

- Ethernet: 10 Mbps (half duplex), 20 Mbps (full duplex)
- Fast Ethernet: 100 Mbps (half duplex), 200 Mbps (full duplex)
- Gigabit: 2000 Mbps (full duplex)
- 2.5 Gigabit: 5Gbps (full duplex)

### Performance

- Data RAM Buffer: 1.5MB
- Switch Capacity: 25Gbps
- MAC Address Table: 16K entries
- Forwarding rate: 18.6Mpps (64-byte packet size)
- Jumbo Frame: 12KB

### Special Features

- Wall-Mountable
- Fanless

### Power

- Input: 100 – 240V AC, 50/60Hz
- Output: 55V/1.3A
- Max. consumption: 7.83W (no PD)

### PoE

- PoE budget: 55W
- PoE Mode A: Pins 1, 2, 3, and 6 for power
- Over current protection
- Short circuit protection

### MTBF

- 830,917 hours

### Operating Temperature

- 0° – 40° C (32° – 104° F)

### Operating Humidity

- Max. 90% non-condensing

### Dimensions

- 286 x 102 x 27mm (11.3 x 4 x 1 in.)

### Weight

- 0.9kg (2 lbs.)

### Certifications

- CE
- FCC

### Warranty

- 3 year

### Package Contents

- TPE-TG350
- Quick Installation Guide
- Power Brick (55V, 1.3A)
- Power Cord (1.5m /4.9 ft.)