



3-Port 200Mbps Powerline AV Adapter TPL-305E (V1.0R)

The 3-Port 200Mbps Powerline AV Adapter uses any electrical outlet to create a secure high speed building-wide network. Connect computers, printers, gaming consoles, televisions, and DVRs to the three Ethernet ports on the bottom of the adapter.

Connect one adapter to your network and plug another adapter in to any outlet on your electrical system for instant high speed network access. Synchronize adapters quickly using the convenient one-touch connect button. Use up to 16* adapters to network devices in different rooms without running new cabling.

LED displays convey device and port status for easy troubleshooting. Advanced AES encryption secures your network. This adapter is ideal for use in buildings that interfere with wireless networking signals.

Features

- 200Mbps building-wide networking over an existing connected electrical system
- 3 x 10/100Mbps Auto-MDIX Ethernet Ports
- One-touch Sync button networks adapters quickly
- Connect one 200Mbps** Powerline AV Adapter to the Internet and then plug in up to 15* additional Powerline AV adapters for instant building connectivity
- Share data intensive files, play games, download music and more at faster data transfer rates
- Advanced 128-bit AES encryption to ensure total network security
- Power Save mode reduces electrical consumption by 70%
- Neighbor network support for up to 4 overlapping networks
- Tri-color LED Indicator
- Network signal transmits up to 300 meters (984ft.)
- Auto QoS support through traffic classification and multiple priority queuing
- Optional management utility compatible with Windows 7 (32/64-bit), Vista (32/64-bit), and XP (32/64-bit) operating systems
- 3-year limited warranty

* Maximum of 16 adapters (nodes) recommended for streaming video across your network. Additional adapters may decrease performance.

** 200Mbps is the maximum theoretical Powerline data rate. Actual throughput will vary depending on environment.

*** Networked Powerline devices need to be plugged into power outlets that are on the same electrical system.


**** GFCI outlets and AFCI circuit breakers may degrade Powerline network signals.

3-Port 200Mbps Powerline AV Adapter TPL-305E (V1.0R)

SPECIFICATIONS

Hardware	
Standards	<ul style="list-style-type: none">• IEEE 802.3, IEEE 802.3x, IEEE 802.3u, HomePlug® AV, IEEE 1901
Interface	<ul style="list-style-type: none">• 3 x 10/100Mbps Auto-MDIX RJ-45 ports, Power prong• Power prong:<ul style="list-style-type: none">• A: North America Type B (NEMA 5-15)• EU: Euro Type C (CEE 7/16)• FR: French Type E (CEE 7/5)
Frequency Band	<ul style="list-style-type: none">• 2 ~ 28 MHz
Modulation	<ul style="list-style-type: none">• OFDM Symbol Modulation on link synchronization, 1024/256/64/8 - QAM, QPSK, BPSK, ROBO Carrier
Protocol	<ul style="list-style-type: none">• TDMA, and CSMA/CA
Speed	<ul style="list-style-type: none">• Powerline: Up to 200Mbps** • Ethernet: Up to 200Mbps (Full Duplex mode)
Utility OS Compatibility	<ul style="list-style-type: none">• Windows 7 (32/64-bit), Vista (32/64-bit), XP(32/64-bit)
Nodes	<ul style="list-style-type: none">• Up to 64 (max.) • Recommended: Up to 16* per powerline network
Overlapping Powerline Networks	<ul style="list-style-type: none">• Up to 4 (per electrical system)
Coverage	<ul style="list-style-type: none">• Up to 300m (984ft.)
Security	<ul style="list-style-type: none">• 128-bit AES (Advanced Encryption Standard)
LED	<ul style="list-style-type: none">• Power (PWR), Ethernet Link/Act (1-3)• Powerline (PL) with Connection Quality Indication: • Best (Green) • Better (Amber) • Good (Red) • No connection (Off)• Ethernet Connection (1-3) • Solid • Blinking • Off
Buttons	<ul style="list-style-type: none">• Sync, Reset
Dimension (L x W X H)	<ul style="list-style-type: none">• A: 103 x 74 x 57 mm (4.1 x 2.9 x 2.2 in.) • EU/FR: 103 x 74 x 72 mm (4.1 x 2.9 x 2.8 in.)
Weight	<ul style="list-style-type: none">• A: 165 g (5.8 oz) • EU/FR: 170 g (6.0 oz)
Power Source	<ul style="list-style-type: none">• 100~240V AC, 50~60Hz
Consumption	<ul style="list-style-type: none">• Active mode: 3.2 Watts (max.) • Standby mode: 0.9 Watts (max.)
Temperature	<ul style="list-style-type: none">• Operating: 0° ~ 40° C (32° ~ 104° F) • Storage: -20° ~ 70° C (-4° ~ 158° F)
Humidity	<ul style="list-style-type: none">• Max. 90% (non-condensing)
Certifications	<ul style="list-style-type: none">• CE, FCC, HomePlug® AV

NETWORKING SOLUTIONS

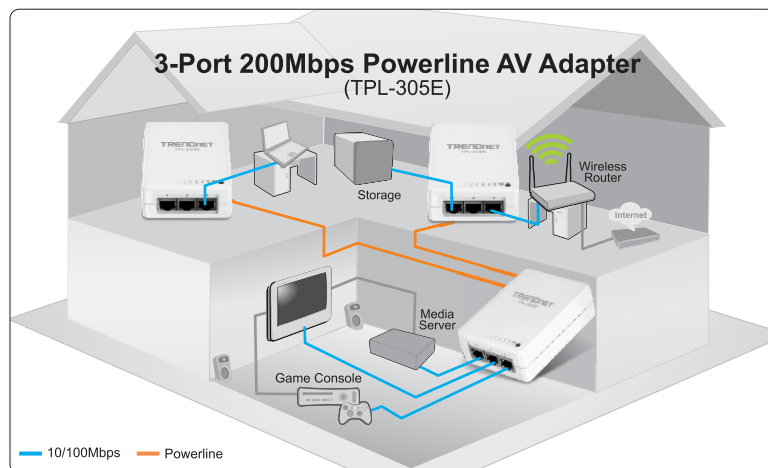

PACKAGE CONTENTS

- TPL-305E
- Multi-Language Quick Installation Guide
- CD-ROM (Utility and User's Guide)
- Network cable (1.5 m / 5 ft.)

RELATED PRODUCTS

TPL-304E	200Mbps Powerline AV Adapter with Bonus Outlet
TPL-310AP	200Mbps Powerline AV Wireless N Access Point
TPL-401E	500Mbps Powerline AV Adapter

CONTACT INFORMATION

TRENDNET®

20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500

Fax: 1-310-961-5511

Web: www.trendnet.com

Email: sales@trendnet.com

1-888-326-6061