

TS-D40G Henorik Attached Storage Rent for to 2000 TRENDuct

10/100Mbps 40GB Network Attached Storage Server with Single Port Print Server

TRENDnet's TS-D40G, a compact-size, auto-sensing 10/100Mbps, 40 Gigabyte network attached storage (NAS) server, is the simple and affordable network storage and printer sharing solution for networks running TCP/IP and/or AppleShare protocols. The TS-D40G's enhanced features such as long filename, double-byte character, and disk quota support, add versatility while its diagnostic indicators and backup utility continually protect your valuable data. Medium-sized LAN and workgroup users can begin accessing expanded network storage capacity and a shared printer in minutes with the TS-D40G's quick setup and configuration utility using standard web browser.

TS-D40G

FEATURES

- 10/100Mbps auto-sensing RJ45 port supports both Ethernet and Fast Ethernet networks
- Industry standard major-brand EIDE 40 Gigabyte Hard Disk Drive
- SMB/CIFS over TCP/IP and AppleShare protocols
- Support Windows 95/98/ME/NT/2000 and Macintosh 7.5 or later network clients
- Built-in Print Server for one parallel port printer
- Quick Setup Utility for Windows 95/98/ME/NT/2000
- Web Browser configurable (using Internet Explorer or Netscape Navigator)
- Full Administrator Control via User Name, User Group, Share Folder, and Access Right
- Support DHCP Server & Multi Segment LAN
- Extensive LED status/diagnostic indicators
- Support long file name, double bye character, and disk quota
- Firmware upgrade can be done from any PC on the LAN
- Optional Hard Disk Drive installation kit
- 3-year Warranty (1-year warranty on Hard Drive)

TREND SPEC'S


Protocol:	SMB/CIFS over TCP/IP and AppleShare
Hard Drive:	1 x 40Gigabyte with EIDE interface
Network Clients:	Windows 95/98/ 2000/NT4.0, Mac with AppleShare and system 7.5 or later
Network Connector:	10/100Mbps auto-sensing UTP/STP RJ45 Connector
Printer Connector:	bi-directional DB-25 female parallel port
Diagnostic LEDs:	Ready, Error, Disk Full, Disk, and LAN
Power:	External AC Power Adapter, 12VDC, 3.6A
Dimensions:	274 x 210 x 66 mm (10.8 x 8.3 x 2.6 inches)
Weight: Operating Temp: Storage Temp: Humidity: Certifications:	Appro. 2.06Kg. (4.53 lbs) 0° ~ 40°C (32° ~ 104° C) -10° ~ 70°C (14° ~ 158° C) Operating: 80%, Storage: 90% (non-condensing) FCC, CE, VCCI, C-tick

TS-D40G

10/100Mbps 40GB Network Attached Storage Server with Single Port Print Server

TOP REASONS THE TS-D40G IS A LASTING TREND

Easy Integration:	Auto-sensing LAN port connects to either 10 or 100Mbps LAN. Configure using Windows Setup Utility or Web Browser.
Cost Effective:	Expand network storage capacity for easy configuration and affordability.
Flexibility:	Attach anywhere on the LAN and allows users on the LAN to access shared files and printer.
Security:	Share Access Control - Read only, full access, and no access. User level control via User Name and User Group.
Reliability:	Protect valuable files with backup utility

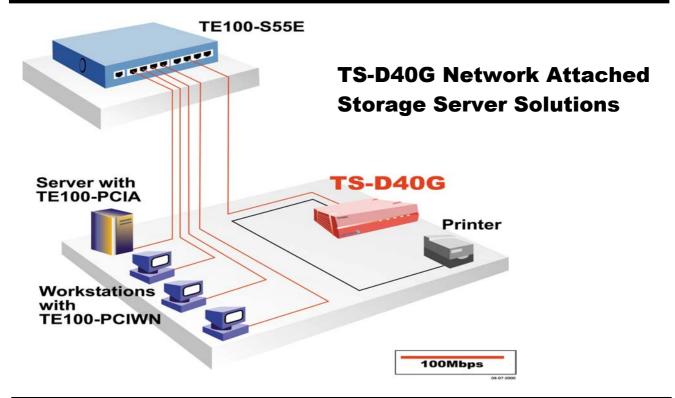



To order please call: 888-326-6061 3135 Kashiwa Street • Torrance, CA 90505 • (310) 891-1100 • Fax: (310) 891-1111 Sales: sales@trendware.com • Support: techsupport@trendware.com