



## **TU-700** **7-port USB Hub**

TRENDnet's TU-700, a 7-port USB Hub, is a highly integrated device that includes seven advanced USB ports. The USB Hub allows a wide variety of legacies and other peripherals to be connected and controlled by USB enabled systems. The easy Plug and Play (PnP) function allows PCs to be connected to monitors, printers, digital speakers, modems, digital cameras, joysticks, and other USB devices. The TU-700 features power control and over-current detection on each of its seven downstream ports. Featuring data access rates of up to 12Mbps, the TU-700 is ideal for your high-performance USB solution.




### **FEATURES**

- Compatible with Universal Serial Bus Rev. 1.0 Specification
- Plug and Play (PnP) with USB devices
- Easy expansion allows the use of up to 127 devices
- Status LEDs per USB port indication
- Supports 1 upstream and 7 downstream USB ports
- Supports for self-powered device configurations
- All downstream ports support high-speed (12Mbps), low-speed (1.5Mbps) operations mode
- Power control/overload detection on each individual USB port
- 5 Year warranty

### **BENEFITS**

- **Compatibility:**  
7-port USB Hub is compatible with Windows 95/98, Windows 2000, iMac, Mac G3, so it is ready to work as soon as the users plug it into PC.
- **Flexibility:**  
Allows a variety of legacies and other peripherals to be connected.
- **Expandability:**  
Able to daisy-chain to additional USB Hub that allows the use up to 127 devices at the same time.
- **Speed:**  
Provides high-speed of 12Mbps and low-speed of 1.5Mbps operations mode.

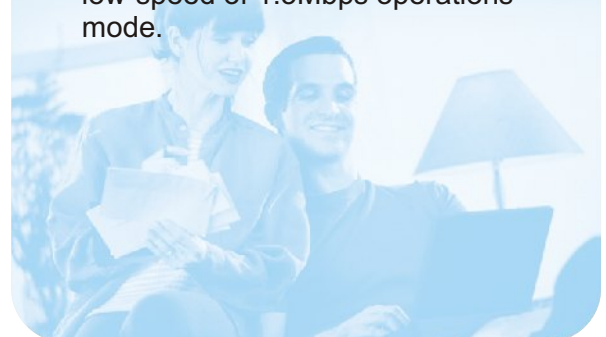

# TU-700

## 7-port USB Hub

### SPECIFICATIONS

**Standard:**

- Universal Serial Bus Standard v1.0

**USB Ports:**

- 1 upstream port, 7 downstream ports

**Access Speed:**

- 12Mbps for high-speed
- 1.5Mbps for low-speed

**Power:**

- External switching power supply  
DC5V/2.4A

**Max Devices Supported:**

- 127 (daisy-chaining hubs)

**Power Consumption:**

- 500mA per each USB downstream port,  
maximum 2.4A

**LED Indicators:**

- 1 Self-Power (per device),
- 1 Port status for each USB downstream port

**Dimensions:**

- 118 x 67 x 32 mm (4.6 x 2.6 x 1.3 inches)

**Weight:**

- 113 g (4 oz.)

**Temperature:**

- Operating: 0° to 50° C (32° to 122° F)
- Storage: -10° to 70° C (14° to 158° F)

**Humidity:**


- Operating: 10 % to 90 % (non-condensing)
- Storage: 10% to 70% (non-condensing)

**Certifications:**

- FCC, CE, VCCI-II



### NETWORKING SOLUTIONS

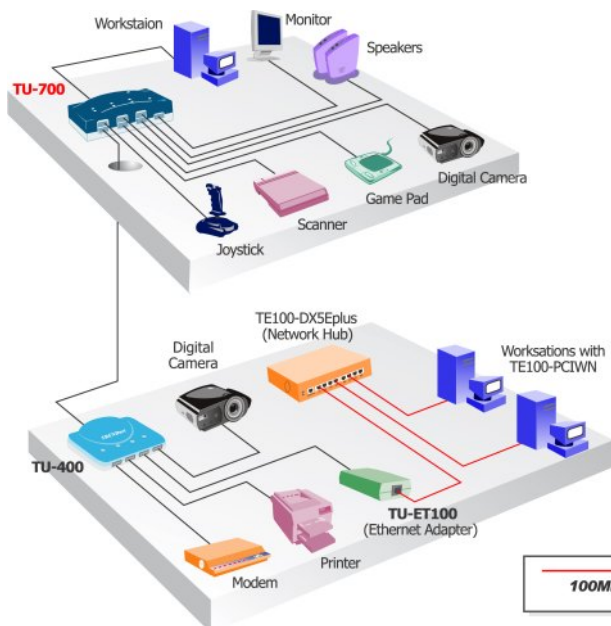

**To Order Please Call:**  
**1-888-326-6061**

### PRODUCT INFORMATION

- TU-ET10: USB to Ethernet Adapter
- TU-ET100: USB to 10/100Mbps Fast Ethernet Adapter
- TU-400: 4-port USB Hub
- TU-700: 7-port USB Hub

### ORDERING INFORMATION

**TRENDware International, Inc.**  
3135 Kashiwa Street  
Torrance, CA. 90505. USA  
Tel: 310-891-1100  
Fax: 310-891-1111  
Web: [www.TRENDNET.com](http://www.TRENDNET.com)  
Email: [sales@trendware.com](mailto:sales@trendware.com)

**TRENDnet**  
TRENDware, USA