

## **TU2-400(V2)** **4-Port Hi-Speed USB 2.0 Hub**

The TU2-400 is a highly integrated 4-Port Hi-Speed USB 2.0 hub. It is the fastest and most convenient way to connect Universal Serial Bus peripherals to your computer. Compliant with the USB 2.0 standard and backwards compatible with the USB 1.0 and 1.1, the TU2-400 lets you access up to four USB devices simultaneously at a speed of 480Mbps. Plug in your hi-speed USB network adapter, scanner, and storage device and enjoy the super fast data transfer rate. Compact, efficient, and easy to install, TRENDnet's TU2-400 is the ultimate choice for USB solution.



### **FEATURES**

- Compliant with USB 2.0 and USB 1.1 Specifications
- Fully Forward and Backward Compatible with USB 1.1 Devices
- Supports all USB speeds: High-Speed (480Mbps), Full-Speed (12Mbps) and Low-Speed (1.5Mbps)
- Switches to the Peripheral's Highest Supported Speed Automatically
- Supports up to 127 USB Devices
- Supports Suspend and Resume Operations
- Compatible with Windows 98SE/ME/2000/XP, Linux and Mac Operating Systems
- USB 2.0 A-B cable included (60cm /2ft.)
- Supports Plug & Play and Easy Installation
- 2-Year Warranty

### **BENEFITS**

- **Compatibility:**  
TU2-400 is compatible with USB 1.1 and USB 2.0 port
- **Flexibility:**  
TU2-400 provides the most convenient way to connect multiple USB devices to any Desktop or Notebook computer
- **Expandability:**  
Able to daisy-chain to additional USB Hubs to connect up to 127 USB devices at the same time
- **Speed:**  
Supports multiple 480Mbps Hi-Speed USB devices



# TU2-400(V2)

## 4-Port Hi-Speed USB 2.0 Hub

### SPECIFICATIONS

**Standard:**

- USB 2.0 & USB 1.1

**USB Controller:**

- OHCI, EHCI

**Ports:**

- 1 x Upstream Port (Type B)
- 7 x Downstream Ports (Type A)

**OS Compliant:**

- Windows 98SE/ME/2000/XP, Linux and Mac

**Data Rate:**

- High-Speed: 480Mbps
- Full-Speed: 12Mbps
- Low-Speed: 1.5Mbps

**Power Consumption:**

- 500mA (max) per port

**Power Adapter:**

- 5V DC, 2A External Power Adapter

**LED:**

- Power

**Max. Devices Supported:**

- 127 (daisy-chaining with other USB hubs)

**Dimension:**

- 80 x 35 x 10 mm (3.14 x 1.4 x 0.4 inches)

**Weight:**

- 10g (0.35oz.)

**Temperature:**

- Operating: 0° ~ 45° C (32° ~ 113° F)
- Storage: -20° to 70° C (-4° ~ 158° F)

**Operating Humidity:**


- 0% to 90% (Non-Condensing)

**Certifications:**

- FCC, CE



### NETWORKING SOLUTIONS

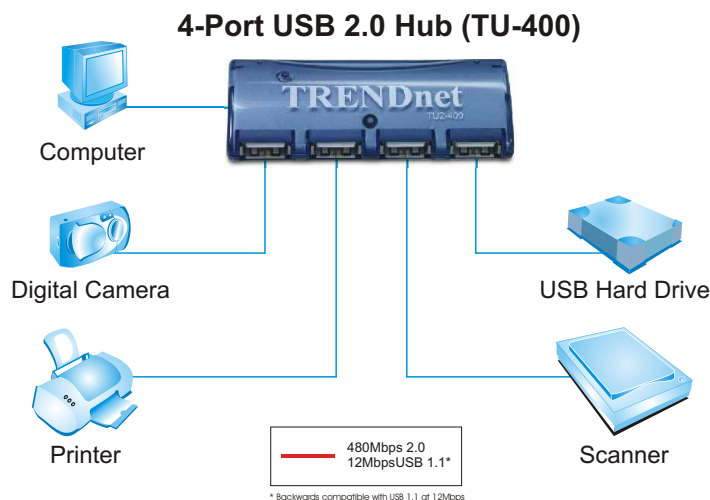

**To Order Please Call:**  
**1-888-326-6061**

### RELATED PRODUCTS

- ➔ **TU-ET200:**  
USB 2.0 Mobile Docking Station
- ➔ **TU2-ET100:**  
High Speed USB 2.0 to 10/100Mbps Ethernet Adapter
- ➔ **TMR-61U2:**  
USB 2.0 6-in-1 Memory Card Reader/Writer

### ORDERING INFORMATION

**TRENDware International, Inc.**  
3135 Kashiwa Street  
Torrance, CA. 90505. USA  
Tel: 310-891-1100  
Fax: 310-891-1111  
Web: [www.TRENDNET.com](http://www.TRENDNET.com)  
Email: [sales@trendware.com](mailto:sales@trendware.com)

**TRENDnet**  
TRENDware, USA