



TU2-400 **4-Port Hi-Speed USB Hub**

The TU2-400 is a highly integrated 4-Port Hi-Speed USB hub. It is the fastest and most convenient way to connect Universal Serial Bus peripherals to your computer. Compliant with the USB 2.0 standard and backwards compatible with the USB 1.0 and 1.1, the TU2-400 lets you access up to four USB devices simultaneously at a speed of 480Mbps. Plug in your hi-speed USB network adapter, scanner, and storage device and enjoy the super fast data transfer rate. Compact, efficient, and easy to install, TRENDnet's TU2-400 is the ultimate choice for USB solution.



FEATURES

- Universal Serial Bus Rev. 1.1 and 2.0 Specifications compliant
- Certified Hi-Speed USB device
- Supports 1 upstream and 4 downstream USB ports
- Plug-n-Play
- Easy expansion with additional USB hubs; connects up to 127 USB devices
- Per-port power over-current detection and protection for downstream ports
- All downstream ports supports high-speed (480Mbps), full-speed (12Mbps), and low-speed (1.5Mbps) transfer rate
- Supports suspend and resume operations
- LED indicators that display device status
- USB 2.0 A-B cable included (1.5 meter)
- 5-year Warranty

BENEFITS

- **Compatibility:**
TU2-400 is compatible with USB 1.1 and USB 2.0 port.
- **Flexibility:**
TU2-400 provides the most convenient way to connect multiple USB devices to any Desktop or Notebook computer.
- **Expandability:**
Able to daisy-chain to additional USB Hubs to connect up to 127 USB devices at the same time.
- **Speed:**
Supports multiple 480Mbps Hi-Speed USB devices.



TU2-400

4-Port Hi-Speed USB Hub

SPECIFICATIONS

Standard:

- Universal Serial Bus Rev. 1.1 and 2.0 Specification

USB Ports:

- 1 x upstream port (Type B),
- 4 x downstream ports (Type A)

Access Speed:

- 480Mbps for high-speed, 12Mbps for full-speed, 1.5Mbps for low-speed

Power:

- External AC Power Adapter.
- Input: 100 ~ 120VAC.
- Output: DC 5V, 2.4A.

USB Downstream Port:

- DC+5V, 500mA (Max.)

Max. Devices Supported:

- 127 (daisy-chaining with other USB hubs)

LED Indicators:

- Self-Power, Hi-Speed, Port Status (x 4)

Dimensions:

- 80 x 58 x 27 mm
(3.15 x 2.28 x 1.06 inches)

Weight:

- 79 g (2.8 Oz)

Temperature:

- Operating: 0° ~ 70° C (32° ~ 158° F)
- Storage: -20° to 80° C (-4° ~ 176° F)

Operating Humidity:


- 0% to 95% (non-condensing)

Certifications:

- FCC, CE, VCCI-B



NETWORKING SOLUTIONS

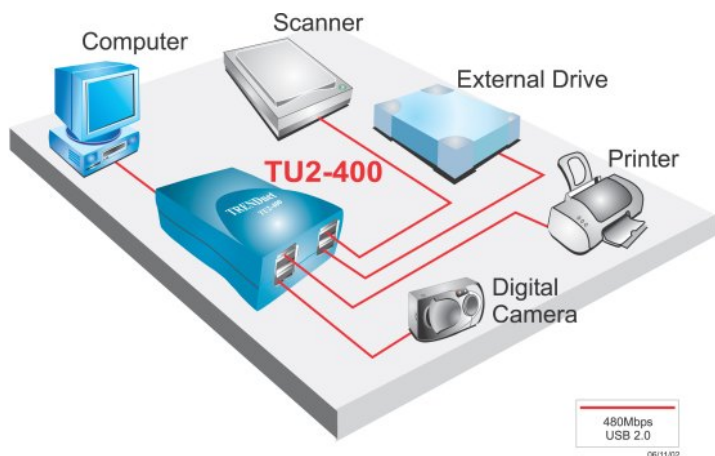

To Order Please Call:
1-888-326-6061

PRODUCT INFORMATION

- TU2-ET100
Hi-Speed USB to Fast Ethernet Adapter
- TU2-400
4-port Hi-Speed USB Hub

ORDERING INFORMATION

TRENDware International, Inc.
3135 Kashiwa Street
Torrance, CA. 90505. USA
Tel: 310-891-1100
Fax: 310-891-1111
Web: www.TRENDNET.com
Email: sales@trendware.com

TRENDnet
TRENDware, USA