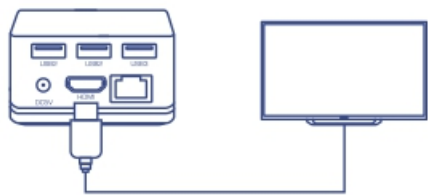# TRENDnet®

Mini USB-C HD Docking Cube

TUC-DS1 (v1.0R)

- Extend or mirror your notebook PC's display to an HDTV via HDMI
- Supports up to 3840 x 2160 resolution at 30Hz
- Gigabit Ethernet Port
- HDMI audio support
- HD video over a high-speed USB-C connection
- One USB 3.0 port and two USB 2.0 ports
- Supports Windows 10 Continuum mode
- Compatible with most Android OS 7.0 and up phones with USB-C interface
- Supports Windows® 10 and Mac® operating systems

TRENDnet's Universal USB-C HD Docking Cube, model TUC-DS1, connects your laptop or Ultrabook™ to your network and multiple devices with a single cable. Manage workstation devices such as USB storage, keyboard, mouse, printer, scanner, and HD display over a high-speed USB-C connection. Extend or mirror your notebook PC's display to an HDTV via HDMI to experience high definition video.
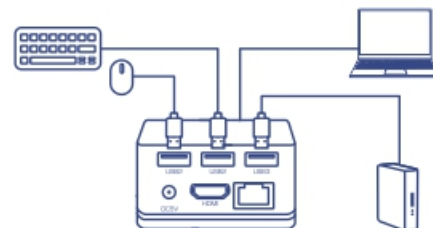
HDMI Port

Connect an HDMI monitor to the TUC-DS1 to add a high definition display to your workstation.

Compact Cube Design

Compact space saving design connects workstation peripherals over a single USB-C connection.

USB Ports

Convenient USB 2.0 and 3.0 ports allow you to connect multiple USB devices to your notebook PC.

Networking Solution

UNIVERSAL USB-C DOCKING STATION
W/ 4K VIDEO SUPPORT

TUC-DS1
Mini USB-C 4K HD Docking Cube

USB-C Docking Station
Build your ideal workstation by connecting all devices to the TUC-DS1 with a single high-speed USB-C connection.

HDMI Port
Connect an HDMI monitor to the TUC-DS1 to add a high definition display to your workstation.

HD Resolution
Supports up to 3840 x 2160 at 30Hz for PC, and up to 1920 x 1080 @ 60Hz for Windows Phone

Audio Support
HDMI Audio Support

USB Ports
One USB 3.0 port and two USB 2.0 ports for USB keyboard, mouse, storage, and other devices

Gigabit Port
Connect to the network with a high-performance gigabit port

Compact Cube Design
Compact space saving design connects workstation peripherals over a single USB-C connection

Easy Setup
Simple installation in minutes

Operating Systems
Compatible with Windows® 10 and Mac® operating systems

Specifications

Standards	• HDMI 1.4b • IEEE 802.3 • IEEE 802.3u • IEEE 802.3ab • IEEE 802.3az • USB 2.0 • USB 3.0
Interface	• 1 x HDMI port • 1 x Gigabit Ethernet port • 1 x USB Type-C upstream port • 1 x USB 3.0 downstream port • 2 x USB 2.0 downstream ports • 1 x Power jack
Supported OS	• Windows® 10, 8.1, 8, 7 • Mac® 10.9 - 10.12 • Android 7.0 (with USB-C connector)
HDMI	• HDMI: Max. 3840 x 2160 resolution (supports full 1080p) • 5.1 Channel (over HDMI source)
Operating Temperature	• 0 – 40 °C (32 – 104 °F)
Operating Humidity	• Max. 90% non-condensing
Power	• Input: 100 - 240 V AC, 50/60 Hz, 0.8 A • Output: 5V DC, 4A external power adapter • Max. consumption: 18.2W
Dimensions	• 65 x 59 x 35mm (2.6 x 2.3 x 1.4 in.)
Weight	• 130g (4.6 oz.)
Warranty	• 2 year limited
Certifications	• CE • FCC

PACKAGE CONTENTS

• TUC-DS1
• Quick Installation Guide
• Power adapter (5V DC, 4A)
• USB-C cable (91cm/ 36 in.)

Updated: 1/29/2018