



## USB Type C to RS-232 DB9 Serial Adapter

TUC-S9 (V1)

- Connect an RS-232 serial device, such as a switch, POS system, a modem, to a USB type C port on your computer
- 5.8 ft. / 1.8m cable for easy installation
- Supports USB 2.0, and compatible with USB 1.1 and USB 3.0 ports
- Supports Windows®
- 2-year warranty

TRENDnet's USB Type C to RS-232 DB9 Serial Adapter, model TUC-S9, allows users to conveniently connect an RS-232 serial device, such as a switch, POS system, modem, or printer, to a USB type C port on your desktop PC or laptop. The USB-C to serial adapter supports Windows® operating systems. Integrated cables provide setup flexibility and accommodates most installation scenarios.



### USB

The USB-C to serial adapter is compatible with USB 1.1, 2.0, and 3.0 devices.



### RS-232 Serial Connector

Connect an RS-232 serial device, such as a switch, POS system, modem, or printer, to standard USB ports on laptops and desktops.



### 5.8 Ft. Flexible Cable

Integrated and flexible 1.8m (5.8 ft.) USB cable accommodates most installation scenarios.

## FEATURES



### Easy Setup

Simple installation of the RS-232 to USB-C adapter in seconds



### Long & Flexible Cable

Integrated and flexible 1.8m (5.8 ft.) USB cable accommodates most installation scenarios



### RS-232

Connect an RS-232 serial device, such as a switch, POS system, modem, or printer, to standard USB ports on laptops and desktops



### USB



The USB-C to RS-232 converter is compatible with USB 1.1, 2.0, and 3.0 devices



### Operating Systems

The USB-C to serial adapter is compatible with Windows® operating systems

## NETWORKING SOLUTION

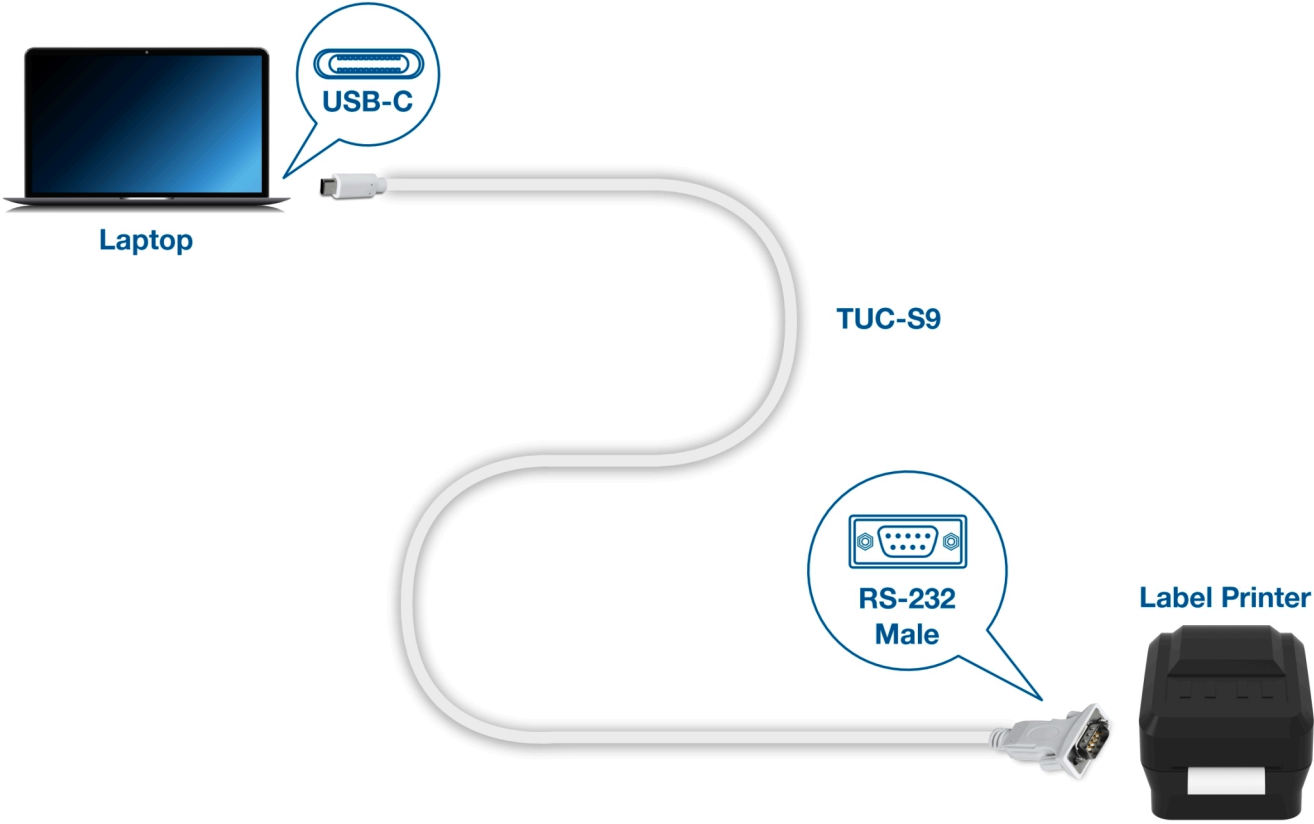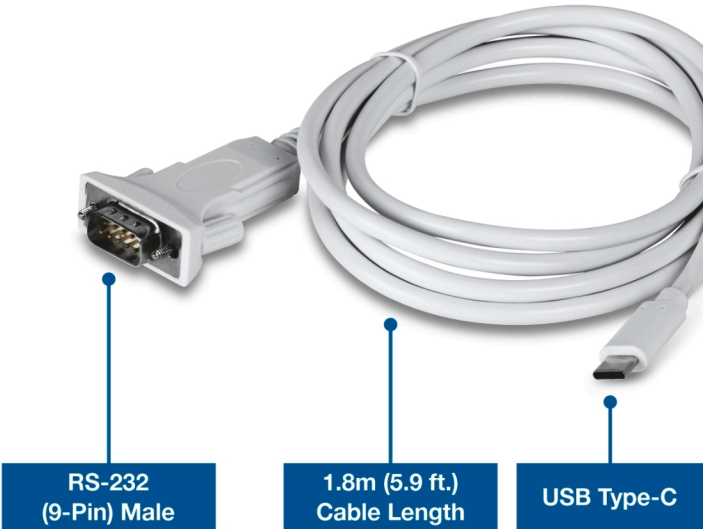

## SPECIFICATIONS

### Standards

- USB 2.0
- USB 1.1

### Interface

- 1 x USB Type C
- 1 x RS-232 (9-pin) male
- Cable length: 1.8m (5.8 ft.)

### Data Rate

- Up to 3Mbps

### Supported OS

- Windows<sup>®</sup> 11, 10, 8.1, 8, 7

### Operating Temperature

- 0° – 40° C (32° – 104° F)

### Operating Humidity

- Max. 85% non-condensing

### Power

- USB powered

### Power Consumption

- 500mA (max.)

### Dimensions

- RS-232 connector: 65 x 35 x 10mm (2.55 x 1.4 x 0.4 in.)
- Cable length: 1.8m (5.8 ft.)

### Weight

- 80g (2.8 oz.)

### Warranty

- 2-year

### Certifications

- CE
- FCC

### Package Contents

- TUC-S9

All references to speed are for comparison purposes only. Product specifications, size, and shape are subject to change without notice, and actual product appearance may differ from that depicted herein.