




## Indoor/Outdoor 4MP H.265 PoE IR Dome Network Camera

TV-IP1329PI (v1.0R)

- Easy Cloud P2P QR code installation
- 4MP HD resolutions at 20fps
- Smart covert IR LEDs for night vision up to 30m (98 ft.)
- Outdoor IP67 weather rated housing
- Save installation costs with Power over Ethernet (PoE)
- 120dB Wide Dynamic Range image balancing
- Program motion detection with email alerts
- Free iOS<sup>®</sup> and Android<sup>™</sup> mobile apps

TRENDnet's Indoor/Outdoor 4MP H.265 WDR PoE IR Bullet and Dome Network Cameras provide day and night surveillance with a night vision range of up to 30m (98 ft.) These compact network cameras deliver year-round surveillance, each with an IP67 weather rated housing to withstand harsh outdoor environments. Record up to 4MP HD video at 20fps in a space-saving H.265 compression format. Setup and view live video with included complimentary software and mobile apps.



### Day/Night HD Surveillance

Powerful 4MP video in H.265 compression and 30m night vision provides 24-hour surveillance. Masked IR LEDs provide covert night-time viewing.



### Power over Ethernet (PoE)


PoE offers cost savings and the flexibility to install the surveillance camera up to 100m (328 ft.) from your PoE source equipment.



### Outdoor Ready

Built for outdoor environments with an IP67 weather rating and an operating temperature range of -30° – 60°C (-22° – 140°F).

## NETWORKING SOLUTION

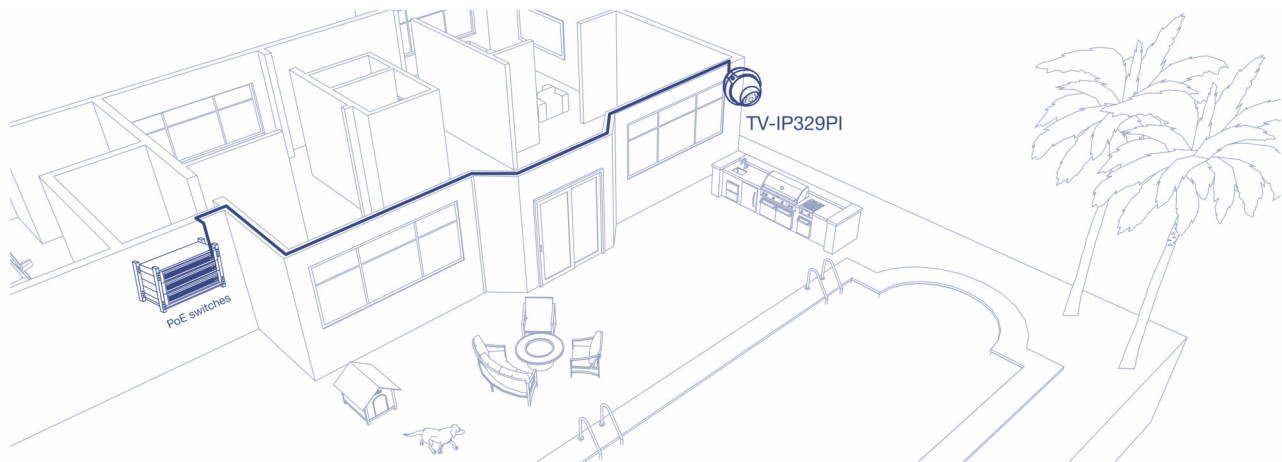

## FEATURES



### 4 Megapixel

Record up to 4MP HD video at 20fps in space-saving H.265 compression format



### Night Vision

Masked IR LEDs provide covert night-time viewing invisible to the human eye, up to 30m (98 ft.)



### Smart IR

Smart IR dynamically adjusts the IR LEDs by lowering the IR intensity when objects are near, and increasing IR intensity when objects are farther away



### PoE

Save installation costs with Power over Ethernet (PoE)



### Outdoor Ready

Outdoor IP67 weather rated housing



### Adjustable Mounting Base

Fully adjustable integrated mounting base provides installation flexibility



### Motion Detection

Create custom motion detection zones to send email notifications when a zone is triggered



### Tamper Detection

Create custom tamper detection zones to send an email notification when the camera view has been obstructed



### Wide Dynamic Range (WDR)

Adjustable 120dB WDR setting improves image quality and focus when the IP camera is exposed to high contrast lighting environments by enhancing the dark areas of the image to make them more visible



### Recording Flexibility

Define custom schedules using continuous (24/7) and event-based recording modes



### ONVIF

ONVIF Profile S and Profile G



### Complimentary VMS Software

Complimentary pro-grade software to manage TRENDnet cameras



### Complimentary Apps

Stream video to a mobile device with free iOS® and Android™ apps

## SPECIFICATIONS

### Lens

- Focal length: 4mm @ F1.2
- Sensor: 1/3" CMOS sensor
- Digital zoom
- WDR: 120dB

### Viewing

- Horizontal angle: 77°
- Manual pan: 0° to 355°
- Manual tilt: 0° to 70°

### Minimum Illumination

- IR off: 0.01 lux
- IR on: 0 lux
- IR distance: 30m (98 ft.)
- IR LED wavelength: 850nm

### Compression

- H.265+ / H.265
- H.264+ / H.264
- MJPEG

### Resolution

- Main stream: H.265+/H.265/H.264+/H.264: 2560 x 1440 up to 20fps
- Sub stream: H.265/H.264/MJPEG: 640 x 480 up to 30fps
- Third stream: H.265/H.264: 1280 x 720 up to 10fps

### Hardware Standards

- IEEE 802.1x
- IEEE 802.3
- IEEE 802.3u
- IEEE 802.3x
- IEEE 802.3af

### Device Interface

- 10/100Mbps PoE port
- Power jack

### Housing

- IP67 weather rated
- Impact resistant

### Management Interface

- Multi-language support: English, French, German, Spanish, and Portuguese
- Image settings: Brightness, Contrast, Saturation, Sharpness, Exposure Time, image Gain, Day/Night switch. Smart IR, BLC, WDR, white balance, Digital Noise Reduction, Mirror, Rotate, Scene Mode, Video Standard
- WDR enhances video quality in high contrast daytime lighting
- Digital Noise Reduction removes digital noise from the video signal
- Recording: to computer, or SAMBA share
- Time, date, and text overlay
- IP Address Filter
- Video Recording: scheduled, motion detection, and tamper detection
- Motion detection: define up to three motion detection areas and motion sensitivity
- Privacy masks: define custom privacy masks
- Tamper detection function: email notification
- Snapshot: real time snapshot and motion triggered
- Supported dynamic DNS services: dyn.com and no-ip.com
- Supports remote management
- Compatible browsers: Chrome™ or Firefox® (live view resolution up to 1280 x 720), Internet Explorer® (live view resolution up to 2560 x 1440)

### Network Protocol

- IPv4, IPv6, UDP, TCP/IP
- DHCP, NTP, DDNS, SMTP, FTP, LLTD
- SNMP v1, v2c, v3, QoS/DSCP, IEEE 802.1X
- NFS, SMB/CIFS
- HTTP, HTTPS
- PPPoE
- UPnP, RTSP, RTP

### Compliant Standard

- ONVIF (Profile S, Profile G)

### Dimension

- 110 x 110 x 82.5mm (4.4 x 4.4 x 3.2 in.)

### Weight

- 410g (0.9 lb.)

### Operating Temperature

- -30° – 50° C (-22° – 122° F)

### Humidity

- Max. 95% non-condensing

### Power

- Input: PoE
- Max. consumption: 7W

### Power Adapter (optional model: 12VDC1A)

- Input: 100 – 240V AC , 50/60Hz
- Output: 12V DC, 1A external power adapter

### TRENDnet Mira VMS

- Supports TRENDnet cameras
- Set recording options (motion detection, schedule, event trigger)
- Search and playback
- Custom viewing modes and options
- Compatibility: Windows® and Mac®

### TRENDnet Mira App

- Free iOS® and Android™ apps
- View live camera video
- Push notifications
- Take snapshots and videos
- Playback
- Share live view to family members or friends

### Certifications

- CE
- FCC
- UL

### Warranty

- 3 year

### Package Contents

- TV-IP1329PI
- Weather seal
- Quick installation guide
- Camera mounting hardware

All references to speed are for comparison purposes only. Product specifications, size, and shape are subject to change without notice, and actual product appearance may differ from that depicted herein.

20675 Manhattan Place • Torrance • CA 90501 • USA • T: 1-888-326-6061 • F: 1-310-961-5511 • [intlsales@trendnet.com](mailto:intlsales@trendnet.com) • [www.TRENDnet.com](http://www.TRENDnet.com)

TRENDnet is a registered trademark. Other Brands and product names are trademarks of their respective holders. Information provided in this document pertain to TRENDnet products and is subject to change at any time, without notice. For the most recent product information please visit <http://www.trendnet.com>. Copyright © TRENDnet. All Rights Reserved.

Updated: 7/10/2020