



N300 Mini Wireless USB Adapter **TEW-624UB(B1.1R)**

The N300 Mini Wireless USB Adapter allows you to connect wirelessly with supercharged speed, range and reliability. Wireless speeds increase up to 300Mbps when connecting to TRENDnet Wireless N access points or wireless routers. This 802.11n device seamlessly connects to your wireless network without performance degradation.

FEATURES

- Wi-Fi Compliant with IEEE 802.11n (draft) Standard
- Wi-Fi Compliant with IEEE 802.11g and IEEE 802.11b Standards
- Supports Ad-Hoc(Peer to Peer) or Infrastructure (AP-Client) Mode
- High-Speed up to 300Mbps Data Rate using IEEE 802.11n connection
- Supports MIMO technology with 2 Built-in Internal Printed Antennas
- Dynamic Data Rate Scaling from 1Mbps to 300Mbps
- Maximum Reliability, Throughput and Connectivity with Automatic Data Rate Switching
- Universal Wireless Connectivity for Seamless Roaming among 802.11b/g/n Networks
- Supports 64/128-bit WEP, WPA/WPA2 and WPA-PSK/WPA2-PSK
- Low Interference and High Susceptibility Guarantee Reliable Performance
- Compatible with Windows 2000/XP/Vista Operating Systems
- Easy User Setup & Diagnostics Utilities
- Wi-Fi Multimedia (WMM) Quality of Service (QoS) supported
- One-step encryption setup with Wi-Fi Protected Setup
- 3-Year Limited Warranty
- Link to Wi-Fi certification: http://certifications.wi-fi.org/wbcs_ViewCertificate.php?product_id=5995


N300 Mini Wireless USB Adapter

TEW-624UB

SPECIFICATIONS

Hardware	
Interface	• USB 2.0, 1.1 Standard
Standards	• IEEE 802.11b, IEEE 802.11g and IEEE 802.11n (Draft 2.0)
Power Consumption	• Receive Mode: 260mA(max) ; Transmit Mode: 420mA(max)
Supported OS	• Windows 2000/XP(32/64-bit)/Vista(32/64 bit)
Product Dimensions	• 80 x 27 x 12mm (3.1 x 1 x 0.5 inches)
Weight	• 20g (0.7oz)
Temperature	• Operation: 0°C ~ 40°C (32°F ~ 104°F); Storage: -10°C ~ 70°C (14°F ~ 158°F)
Humidity	• 10% ~ 95% (Non-Condensing)
Certification	• CE, FCC
Wireless	
Module Technique	• 802.11b: CCK (11 and 5.5Mbps), DQPSK (2Mbps), DBPSK (1Mbps) • 802.11g: OFDM with BPSK, QPSK and 16/64-QAM sub-Carrier modulations • 802.11n: OFDM, 64-QAM
Antenna	• Built-in 2 Internal Printed Antennas
Frequency	• 2.412 ~ 2.484 GHz
Media Access Protocol	• CSMA/CA with AC
Data Rate (auto fallback)	• 802.11b: 11Mbps, 5.5Mbps, 2Mbps, and 1Mbps • 802.11g: 54Mbps, 48Mbps, 36Mbps, 24Mbps, 18Mbps, 12Mbps, 9Mbps and 6Mbps • 802.11n (draft): up to 300Mbps
Output Power	• 802.11b: 17dBm (typical) • 802.11g: 14dBm (typical) • 802.11n: 13dBm (typical)
Receiving Sensitivity	• 802.11b: -88dBm (typical) @ 10% PER • 802.11g: -74dBm (typical) @ 10% PER • 802.11n: -66dBm (typical) @ 8% PER
Encryption	• 64/128-bit WEP (Hex & ASCII), WPA/WPA2/WPA-PSK/WPA2-PSK (AES/TKIP)
Channels	• 1~11 (FCC), 1~13 (ETSI)

NETWORKING SOLUTIONS

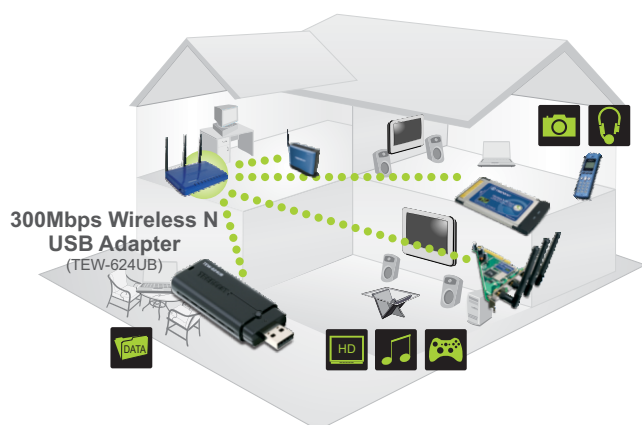

••••• 300Mbps, share multimedia throughout the house

PACKAGE CONTENTS

- TEW-624UB
- Utility & Driver CD-ROM
- Multi-Language Quick Installation Guide
- 1 x USB Cable (145mm/5.7inches)

RELATED PRODUCTS

TEW-621PC	300Mbps Wireless N-Draft PC Card
TEW-623PI	300Mbps Wireless N-Draft PCI Adapter
TEW-630APB	300Mbps Wireless N-Draft Access Point
TEW-632BRP	300Mbps Wireless N-Draft Firewall Router

ORDERING INFORMATION

TRENDnet[®]

20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500

Fax: 1-310-961-5511

Web: www.trendnet.com

Email: sales@trendnet.com

To Order Please Call:

1-888-326-6061

