



150Mbps Wireless N Home Router TEW-651BR (V1.0R)

The 150Mbps Wireless N Home Router delivers the highest level of security with 6x the speed and 3x the coverage of wireless g products. Quickly install the router and use it with TRENDnet wireless n adapters to receive the full benefits of wireless n speed and coverage.

The latest in wireless encryption and a secure firewall protect your valuable data. Router setup is fast and intuitive. Wireless Protected Setup (WPS) integrates other WPS supported wireless adapters at the touch of a button. Seamlessly stream HD media, download files and surf online with wireless n speed.

Features

- Based on IEEE 802.11n technology and compliant with IEEE 802.11b/g standards
- 4 x 10/100Mbps Auto-MDIX LAN ports
- 1 x 10/100Mbps WAN port (Internet)
- GREENnet technology reduces port-based power consumption
- Compatible with most popular cable/DSL Internet service providers using Dynamic/Static IP, PPPoE, PPTP and L2TP
- High-speed data rates of up to 150Mbps with IEEE 802.11n*
- Wi-Fi Protected Setup (WPS) connects wireless clients at the push of a button
- Supports 64/128-bit WEP, WPA/WPA2-RADIUS and WPA-PSK/WPA2-PSK
- Internet Access Control (MAC Address, Domain and IP Filtering)
- Easy remote management via Web browser
- Firewall features Network Address Translation (NAT)
- Universal Plug and Play (UPnP) and Application Level Gateway support for Internet applications such as email, FTP, gaming, remote desktop, Net Meeting, Telnet and more
- Wi-Fi Multimedia (WMM) Quality of Service (QoS) supported
- Simple setup via Web browser using the latest version of Internet Explorer, Firefox, and Safari
- Works with Windows, Linux, and Mac operating systems
- Indoor range up to 100 meters (330 ft.) depending on the environment
- Outdoor range up to 300 meters (980 ft.) depending on the environment
- 3-year limited warranty

150Mbps Wireless N Home Router

TEW-651BR (V1.0R)

SPECIFICATIONS


Hardware	
Standards	• IEEE 802.3 (10Base-T), IEEE 802.3u (100Base-TX), IEEE 802.11b, IEEE 802.11g, based on IEEE 802.11n technology
WAN	• 1 x 10/100Mbps Auto-MDIX WAN port (Internet)
LAN	• 4 x 10/100Mbps Auto-MDIX LAN port
WPS Button	• Enables Wi-Fi Protected Setup (WPS) function
Connection Type	• Dynamic IP, Static (fixed) IP, PPPoE, PPTP, L2TP
Supported Web Browsers	• Internet Explorer 6.0 or above, Firefox, Safari
Internet Access Control	• MAC Address Filter (20 entries), Domain/URL Filter (40 entries), Protocol/IP Filter (20 entries)
LED Indicators	• Power, Status, LAN1 - LAN4, WAN, WLAN
Power Supply	• 5V DC, 1.2A external power adapter
Power Consumption	• 3.5 watts (max)
Dimensions (LxWxH)	• 150 x 110 x 30mm (5.9 x 4.3 x 1.2in)
Weight	• 225g (7.8oz)
Temperature	• Operating: 0° ~ 40°C (32° ~ 104°F) • Storage: -10°C ~ 70°C (-14° ~ 158°F)
Humidity	• 10% ~ 95% max (non-condensing)
Certifications	• CE, FCC
Wireless	
Frequency	• 2.412 ~ 2.484 GHz ISM band
Antenna	• 1 x 2dBi fixed dipole antenna
Module Technique	• 802.11b: CCK (11 and 5.5Mbps), DQPSK (2Mbps), DBPSK (1Mbps) • 802.11g: OFDM with BPSK, QPSK and 16/64-QAM • 802.11n: BPSK, QPSK, 16QAM, 64QAM with OFDM
Media Access Protocol	• CSMA/CA with ACK
Data Rate (Auto Fallback)	• 802.11b: up to 11Mbps • 802.11g: up to 54Mbps • 802.11n: up to 150Mbps
Output Power	• 802.11b: 15dBm (typical) @ 11Mbps • 802.11g: 15dBm (typical) @ 54Mbps • 802.11n: 13dBm (typical) @ 150Mbps
Receiving Sensitivity	• 802.11b: -85dBm (typical) @ 11Mbps • 802.11g: -68dBm (typical) @ 54Mbps • 802.11n: -62dBm (typical) @ 150Mbps
Encryption	• 64/128-WEP, WPA-PSK/WPA2-PSK, WPA/WPA2-RADIUS
Channels	• 1-11 (FCC), 1-13 (ETSI)

* Maximum wireless signal rates are referenced from IEEE 802.11 theoretical specifications. Actual data throughput and coverage will vary depending on interference, network traffic, building materials and other conditions.

150Mbps Wireless N Home Router TEW-651BR (V1.0R)

NETWORKING SOLUTIONS

150Mbps Wireless N Home Router (TEW-651BR)

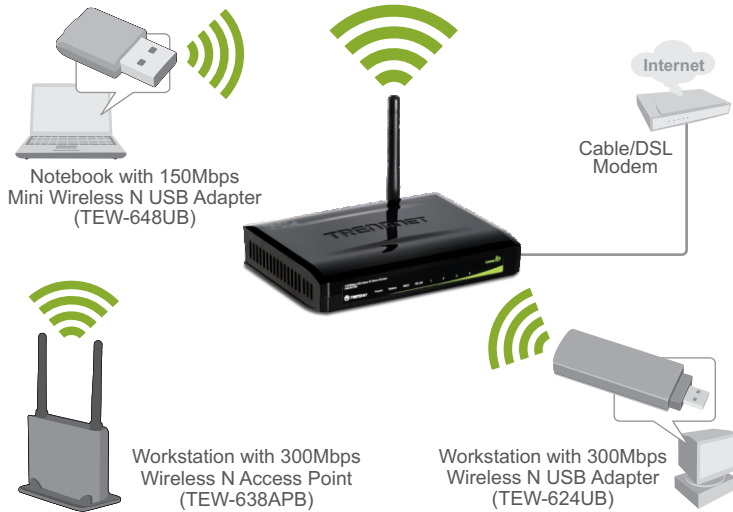

Wireless N Connection

PACKAGE CONTENTS

- TEW-651BR
- Multi-Language Quick Installation Guide
- CD-ROM (User's Guide)
- Cat. 5 Ethernet cable (1.5m / 4.9ft)
- Power adapter (5V DC, 1.5A)

RELATED PRODUCTS

TEW-638APB	300Mbps Wireless N Access Point
TEW-648UB	150Mbps Mini Wireless N USB Adapter
TEW-624UB	300Mbps Wireless N USB Adapter

ORDER INFORMATION

TRENDnet®

20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500

Fax: 1-310-961-5511

Web: www.trendnet.com

Email: sales@trendnet.com

To Order Please Call:

1-888-326-6061