



54Mbps 802.11g Wireless 1-Port Parallel Print Server

TEW-P1PG

TEW-P1PG is a print server that transforms virtually any stand-alone Parallel networkable printer into a shared network printer. The TEW-P1PG provides IEEE 802.11g 54Mbps wireless interface for integrating into existing wireless network. The TEW-P1PG is designed for printers equipped with parallel compliant printer port and it is an ideal network solution to convert conventional parallel printer into a shared resource on the network.

FEATURES

- Wi-Fi Compliant with IEEE 802.11b/g devices
- One RJ-45 10/100Mbps Auto-MDIX Fast Ethernet port
- IEEE 1284 male centronics (DB-36) Parallel printer port
- Advance wireless encryption: WEP, WPA-PSK, WPA2-PSK
- LPP printing for Windows
- IPP printing for Windows 7/Vista/2003 Server/XP/2000
- Printing over email and print error email notification
- Second HTTP port for remote Web configuration
- Supports Macintosh Rendezvous Zero Configuration *
- Windows-based setup wizard and configuration utility
- Web-Based (HTTP) configuration
- Built-in flash memory for easy firmware upgrade
- 3-Year limited Warranty


*Mac Systems are only compatible with Post-Script printers

54Mbps 802.11g Wireless 1-Port Parallel Print Server TEW-P1PG

SPECIFICATIONS

Hardware	
Standards	• Wired: IEEE 802.3 10Base-T, IEEE 802.3u 100Base-TX • Wireless: IEEE 802.11g/b
Printer Interface	• IEEE 1284 Male Centronics (DB-36)
LAN Port	• 10/100Mbps Auto-Negotiation UTP/STP RJ-45 Port
CPU/ SDRAM / Flash ROM	• RDC R2880/ 8MByte/ 2MByte
LED	• Power, LPT, Link/Act
Transport Protocol	• TCP/IP, SMB, NetBEUI, AppleTalk
TCP/IP Protocol Supported	• BOOTP, SNMP, Telnet, TFTP, FTP, LPD, RARP, DHCP, IPP
OS Support	• Windows 7(32/64-bit)/Vista(32/64-bit)/2003 Server/XP(32/64-bit)/2000/ME/98SE • Netware 5.x NDPS LPR Remote Printing (TCP/IP) • HP-UX Unix, Sun OS, Solaris, SCO Unix, AIX, Unixware, Linux & Mac OS 10.1 ~ 10.6
Management	• Windows Utility or Web-Browser Configuration
Power	• 5V DC 2.5A External Power Adapter
Dimensions/Weight	• 57 x 90 x 32mm (2.2 x 3.5 x 1.3 inches) Not including antenna. /85 g (3 oz.)
Temperature	• Operating: 0°~50°C (32°~122°F) • Storage: -25°~55°C (-13°~131°F)
Humidity	• 10%~90% (non-condensing)
Certification	• CE, FCC
Wireless	
Frequency	• 2.4 ~ 2.4835 GHz (Industrial Scientific Medical Band)
Encryption	• 64/128-bit WEP (ASCII/HEX), WPA-PSK
Antenna	• 2dBi detachable antenna (Reverse SMA Connector)
Data Rate	• IEEE 802.11g: 54Mbps, 48Mbps, 36Mbps, 24Mbps, 18Mbps, 12Mbps, 9Mbps and 6Mbps • IEEE 802.11b: 11Mbps, 5.5Mbps, 2Mbps and 1Mbps (Auto Fallback)

NETWORKING SOLUTIONS

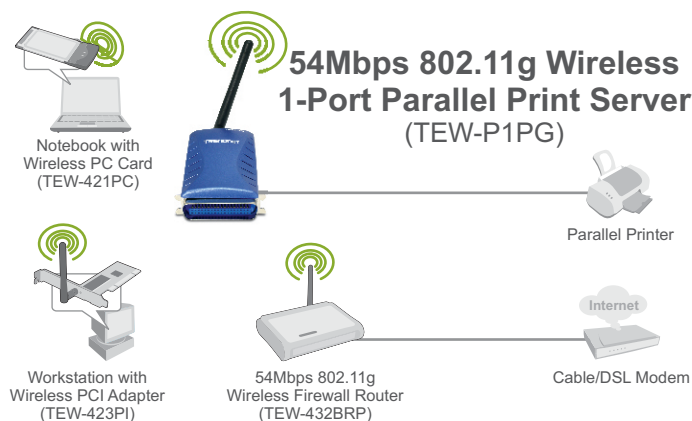

*Mac Systems are only compatible with Post-Script printers

PACKAGE CONTENTS

- TEW-P1PG
- Quick Installation Guide
- Utility CD-ROM
- Power Adapter (5V DC, 2.5A)

RELATED PRODUCTS

TEW-432BRP	54Mbps 802.11g Wireless Firewall Router
TEW-421PC	54Mbps 802.11g Wireless PC Card
TEW-423PI	54Mbps 802.11g Wireless PCI Adapter

ORDERING INFORMATION

TRENDnet[®]

20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500

Fax: 1-310-961-5511

Web: www.trendnet.com

Email: sales@trendnet.com

To Order Please Call:

1-888-326-6061

