



Ghid de instalare in limba romana



**TE100-S55Eplus**  
**TE100-S88Eplus**  
**TE100-S16Eplus**

# Table of Contents

Româna .....	1
1. Avant de commencer .....	1
2. Installation du matériel .....	2
3. Caracteristici tehnice .....	3
Remediarea problemelor aparute în functionare .....	5

# 1. Înainte de a începe




## Pachetul conține

- TE100-S55Eplus/TE100-S88Eplus/TE100-S16Eplus
- Ghid de instalare rapidă
- Adaptor de alimentare AC

## Cerinte pentru instalare

- Computer cu adaptor de rețea instalat.
- Suprafața trebuie să suporte greutatea de cel puțin 1.5 Kg a Switch-ului.
- Priza de alimentare trebuie să fie la cel mult 1,82 metri de Switch.
- Verificare vizuală a mufei de CC pentru asigurarea conectării corecte la adaptorul de alimentare.
- Asigurarea existenței unei disipări adecvate a căldurii și a unei bune ventilări în jurul Switch-ului.
- A nu se plasa obiecte grele pe suprafața Switch-ului.

## Aplicatie

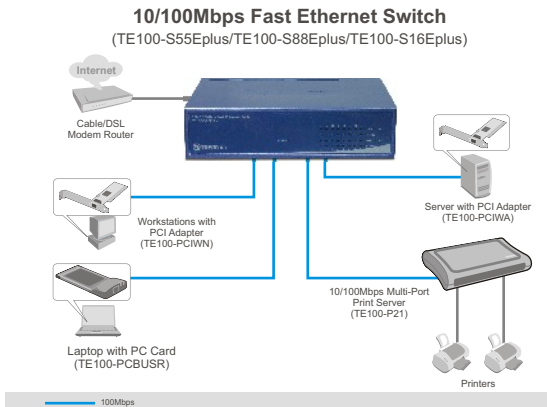

## 2. Instalare Hardware

1. Conectați **Adaptorul de Alimentare de CA** la TE100-S55Eplus/TE100-S88Eplus/TE100-S16Eplus și apoi la o priză.



2. Conectați un cablu de rețea CAT-5 RJ-45 de la computer la un port Ethernet disponibil al TE100-S55Eplus/TE100-S88Eplus/TE100-S16Eplus



Generale	
<b>Standarde</b>	IEEE 802.3 10BASE-T Ethernet IEEE 802.3u 100BASE-TX Fast Ethernet ANSI/IEEE 802.3 NWay Auto-negotiation IEEE 802.3x Full-Duplex Flow Control
<b>Protocol</b>	CSMA/CD
<b>Rata de Transfer Date</b>	Ethernet: 10Mbps (Half-Duplex), 20Mbps (Full-Duplex) Fast Ethernet: 100Mbps (Half-Duplex), 200Mbps (Full-Duplex)
<b>Topologie</b>	În stea
<b>Cabluri de Retea</b>	Ethernet: UTP/STP CAT-3, 4, 5 Fast Ethernet: UTP/STP CAT5, 5e , 6
<b>Numar de Porturi of Ports</b>	5, 8 sau 16 porturi x 10/100Mbps Auto-Negotiation, Auto-MDIX

Performante	
<b>Metoda de Transmisie</b>	Store-and-Forward (stocare si transmitere)
<b>Tabel de Adrese MAC</b>	TE100-S55Eplus: 1K Intrari per Dispozitiv TE100-S88Eplus: 1K Intrari per Dispozitiv TE100-S16Eplus: 8K Intrari per Dispozitiv
<b>Memorarea Adreselor MAC</b>	Automatic Update (reîmprospatare automata)

## Fizice si de Mediu Ambient

<b>Alimentare CC</b>	7.5V, 1A CC
<b>Consum Energetic</b>	TE100-S55Eplus: 2.5W (maxim) TE100-S88Eplus: 2.8W (maxim) TE100-S16Eplus: 6 W (maxim)
<b>Temperatura</b>	De functionare: 0° ~ 40° C De depozitare: -10° ~ 70° C
<b>Umiditate</b>	De functionare: 10% ~ 90% De depozitare: 5% ~ 90%
<b>Dimensuni (L x l x î)</b>	TE100-S55Eplus: 116 x 69 x 24 mm TE100-S88Eplus: 136 x 70 x 25 mm TE100-S16Eplus: 184 x 124 x 44 mm
<b>Greutate</b>	TE100-S55Eplus: 220g TE100-S88Eplus: 260g TE100-S16Eplus: 780g
<b>Certificare</b>	FCC, CE

**P1: După conectarea Switch-ului la o priză de alimentare, nu se aprind LED-urile.**

**R1:** Verificați legarea adaptorului de alimentare extern la TE100- S55Eplus/ TE100-S88Eplus/ TE100-S16Eplus și la priză. De asemenea, verificați dacă priză este alimentată.

**P2: Atunci când conectez un PC la portul Switch-ului, LED-ul LINK/ACT se aprinde, dar LED-ul 100Mbps rămâne stins.**

**R2:** Atunci când LED-ul 100Mbps rămâne stins, viteza conexiunii PC-ului este de 10Mbps.

**P3: După ce conectez mai multe PC-uri la Switch, nu pot să fac schimb de fișiere.**

**R3:** Unu: verificați LED-urile Switch-ului. Asigurați-vă că LED-ul LINK/ACT este aprins. Doi: verificați cablul de rețea. Lungimea minimă a cablului este de 1.5 metri, iar lungimea maximă a lui este de 100 metri. Trei: dezactivați orice tip de aplicație firewall ce ar putea rula pe PC-ul dvs. Patru: verificați dacă aveți activată opțiunea File and printer sharing. Va rugăm să contactați centrul de asistență al Microsoft pentru mai multe informații.

**P4: După ce conectez PC-urile mele la Switch, pot să intru pe Internet numai de pe unul dintre ele.**

**R4:** Switch-ul nu a fost proiectat pentru a permite conectarea simultană la Internet a mai multor PC-uri. Va trebui să vă procurați un router.


În cazul în care încă mai întâmpinați probleme sau aveți întrebări legate de TE100-S55Eplus/ TE100-S88Eplus/ TE100-S16Eplus, vă rugăm să contactați Departamentul de Asistență Tehnică al TRENDnet.

## Certifications

This equipment has been tested and found to comply with FCC and CE Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received.

Including interference that may cause undesired operation.



**NOTE:** THE MANUFACTURER IS NOT RESPONSIBLE FOR ANY RADIO OR TV INTERFERENCE CAUSED BY UNAUTHORIZED MODIFICATIONS TO THIS EQUIPMENT. SUCH MODIFICATIONS COULD VOID THE USER'S AUTHORITY TO OPERATE THE EQUIPMENT.

## Limited Warranty

TRENDnet warrants its products against defects in material and workmanship, under normal use and service, for the following lengths of time from the date of purchase.

### **TE100-S55Eplus/TE100-S88Eplus/TE100-S16Eplus - 5-Year Warranty**

If a product does not operate as warranted above during the applicable warranty period, TRENDnet shall, at its option and expense, repair the defective product or deliver to customer an equivalent product to replace the defective item. All products that are replaced will become the property of TRENDnet. Replacement products may be new or reconditioned.

TRENDnet shall not be responsible for any software, firmware, information, or memory data of customer contained in, stored on, or integrated with any products returned to TRENDnet pursuant to any warranty.

There are no user serviceable parts inside the product. Do not remove or attempt to service the product through any unauthorized service center. This warranty is voided if (i) the product has been modified or repaired by any unauthorized service center, (ii) the product was subject to accident, abuse, or improper use (iii) the product was subject to conditions more severe than those specified in the manual.

Warranty service may be obtained by contacting TRENDnet office within the applicable warranty period for a Return Material Authorization (RMA) number, accompanied by a copy of the dated proof of the purchase. Products returned to TRENDnet must be pre-authorized by TRENDnet with RMA number marked on the outside of the package, and sent prepaid, insured and packaged appropriately for safe shipment.



WARRANTIES EXCLUSIVE: IF THE TRENDNET PRODUCT DOES NOT OPERATE AS WARRANTED ABOVE, THE CUSTOMER'S SOLE REMEDY SHALL BE, AT TRENDNET'S OPTION, REPAIR OR REPLACEMENT. THE FOREGOING WARRANTIES AND REMEDIES ARE EXCLUSIVE AND ARE IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, EITHER IN FACT OR BY OPERATION OF LAW, STATUTORY OR OTHERWISE, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. TRENDNET NEITHER ASSUMES NOR AUTHORIZES ANY OTHER PERSON TO ASSUME FOR IT ANY OTHER LIABILITY IN CONNECTION WITH THE SALE, INSTALLATION, MAINTENANCE OR USE OF TRENDNET'S PRODUCTS.

TRENDNET SHALL NOT BE LIABLE UNDER THIS WARRANTY IF ITS TESTING AND EXAMINATION DISCLOSE THAT THE ALLEGED DEFECT IN THE PRODUCT DOES NOT EXIST OR WAS CAUSED BY CUSTOMER'S OR ANY THIRD PERSON'S MISUSE, NEGLIGENCE, IMPROPER INSTALLATION OR TESTING, UNAUTHORIZED ATTEMPTS TO REPAIR OR MODIFY, OR ANY OTHER CAUSE BEYOND THE RANGE OF THE INTENDED USE, OR BY ACCIDENT, FIRE, LIGHTNING, OR OTHER HAZARD.

LIMITATION OF LIABILITY: TO THE FULL EXTENT ALLOWED BY LAW TRENDNET ALSO EXCLUDES FOR ITSELF AND ITS SUPPLIERS ANY LIABILITY, WHETHER BASED IN CONTRACT OR TORT (INCLUDING NEGLIGENCE), FOR INCIDENTAL, CONSEQUENTIAL, INDIRECT, SPECIAL, OR PUNITIVE DAMAGES OF ANY KIND, OR FOR LOSS OF REVENUE OR PROFITS, LOSS OF BUSINESS, LOSS OF INFORMATION OR DATA, OR OTHER FINANCIAL LOSS ARISING OUT OF OR IN CONNECTION WITH THE SALE, INSTALLATION, MAINTENANCE, USE, PERFORMANCE, FAILURE, OR INTERRUPTION OF THE POSSIBILITY OF SUCH DAMAGES, AND LIMITS ITS LIABILITY TO REPAIR, REPLACEMENT, OR REFUND OF THE PURCHASE PRICE PAID, AT TRENDNET'S OPTION. THIS DISCLAIMER OF LIABILITY FOR DAMAGES WILL NOT BE AFFECTED IF ANY REMEDY PROVIDED HEREIN SHALL FAIL OF ITS ESSENTIAL PURPOSE.

Governing Law: This Limited Warranty shall be governed by the laws of the state of California.

Note: AC/DC Power Adapter, Cooling Fan, and Power Supply carry 1-Year Warranty



## TRENDnet Technical Support

### US • Canada

**Toll Free Telephone:** 1(866) 845-3673

24/7 Tech Support



### Europe (Germany • France • Italy • Spain • Switzerland • UK)

**Toll Free Telephone:** +00800 60 76 76 67

English/Espanol - 24/7

Francais/Deutsch - 11am-8pm, Monday - Friday MET

### Worldwide

**Telephone:** +{(31) (0) 20 504 05 35

English/Espanol - 24/7

Francais/Deutsch - 11am-8pm, Monday - Friday MET

## Product Warranty Registration

Please take a moment to register your product online.

Go to TRENDnet's website at <http://www.trendnet.com>

**TRENDnet**

3135 Kashiwa Street  
Torrance, CA 90505  
USA