

TK-205K

User's Guide

Version 10.11.05



Table of Contents

Français	1
1. Préparation de l'installation	1
2. Introduction	2
3. Installation	3
4. Fonctionnement	4
Specifications	5
Troubleshooting	6

1. Préparation de l'installation

Vérification du contenu de l'emballage

Veillez vérifier la présence des éléments suivants dans la boîte :



Le commutateur KVM PS/2 TK-205K à 2 ports est compatible avec pratiquement tous les ordinateurs et les systèmes d'exploitation. Vous n'avez besoin que d'un moniteur, d'un clavier PS/2 et d'une souris PS/2.

2. Introduction

LE TK-205K est un switch KVM à 2 ports qui comprend deux ensembles de câbles KVM. Ce commutateur KVM vous permet de gérer et de contrôler deux ordinateurs en n'utilisant qu'un seul ensemble moniteur/clavier et souris PS/2.

Support matériel

Le TK-205K est compatible avec la plate-forme PC. Le TK-205K est également compatible avec pratiquement toutes les souris PS/2, y compris la souris Microsoft Intellimouse, la souris Microsoft Optical et la souris Logitech Net.

Support logiciel

Il ne nécessite aucun pilote ni logiciel. Il est compatible avec les systèmes d'exploitation suivants : Serveur Windows 98/ME/2000/XP/2003, Netware, Unix, et Linux.

Plug and play et branchement à chaud

Il se branche sur votre ordinateur à l'aide de l'interface PS/2 pour un fonctionnement plug and play et une connectivité à chaud des plus pratiques.


Touches d'accès rapide

Les touches d'accès rapide vous permettent de commuter rapidement et facilement entre vos ordinateurs.

Grâce à ses fonctionnalités complètes, rassemblées dans une surface limitée, le TK-205K de TRENDnet est le commutateur idéal à utiliser chez vous et au bureau.

3. Installation

1. Eteignez les deux ordinateurs et leurs périphériques et débranchez tous les câbles d'alimentation.
 2. Connectez les câbles du clavier, du moniteur et de la souris partagés à leurs ports respectifs sur le Switch KVM. Pour plus de facilité, les fiches du TK-205K affichent un code de couleur.
 3. Connectez chaque ensemble de câbles KVM au TK-205K et à chaque port PS/2 ainsi qu'aux prises vidéo de l'ordinateur.
 4. Allumez les deux ordinateurs. Quand les ordinateurs ont terminé leur phase de démarrage, vous pouvez commencer à utiliser le Switch KVM.
- L'installation est à présent terminée.**

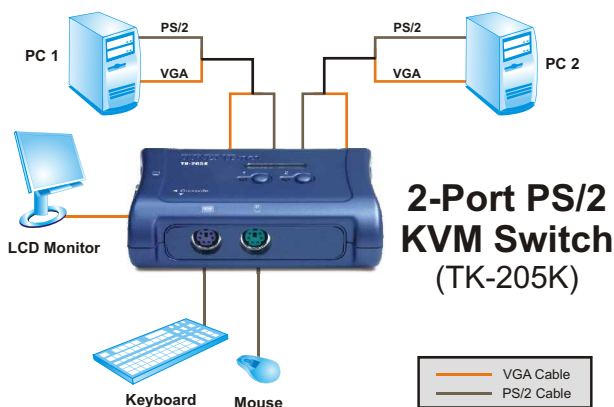

4. Fonctionnement

Touches d'accès rapide

Un raccourci clavier consiste en une combinaison de trois touches :
Veuillez consulter la page suivante pour davantage de détails.

Accès rapide = ScrLk + ScrLk + Touche(s)

Après avoir appuyé sur la touche ScrLk, vous disposez de 2 secondes pour appuyer à nouveau sur cette dernière. Vous disposez alors de 2 secondes supplémentaires pour appuyer sur une touche de commande. Si vous n'enfonchez aucune touche dans les deux secondes, le mode « accès rapide » est annulé.

Références rapides pour le TK-205K		
Commande	Combinaison de touches	Description
Sélection du PC	ScrLk + ScrLk + X ¹ <small>Sélection du PC (x est une touche numérique située dans la partie supérieure du clavier) x = 1 ~ 2 pour le numéro du canal PC</small>	Sélectionne le canal PC actif.
Canal PC inférieur suivant	ScrLk + ScrLk + ↑ (Flèche haut)	Sélectionne le canal PC connecté inférieur suivant.
Canal PC supérieur suivant	ScrLk + ScrLk + ↓ (Flèche bas)	Sélectionne le canal PC connecté supérieur suivant.
Recherche automatique	ScrLk + ScrLk + S	Recherche automatique parmi tous les canaux pour un aperçu rapide à l'écran de chaque canal.
Arrêt de la recherche automatique	Press any key on keyboard	Met fin à la recherche automatique.

REMARQUE

1. Veuillez noter que x remplace une touche numérique représentant le numéro du port sélectionné. (x = 1 ou 2) N'utilisez que les touches numériques situées dans la partie supérieure du clavier.

Convention concernant les touches de raccourci:

La séquence ScrLk + ScrLk + (key) signifie que vous devez enfoncer chaque touche consécutivement et non simultanément.

Specifications

Computer Connections:	2
KVM Cable:	2 Sets of 1.2M (4ft) KVM Cables
Port Connectors:	Keyboard & Mouse: PS/2 type 6-pin mini Din (female). Monitor: 15-pin HDDB type (female)
Console Port:	1
Manual Selection:	Push Button
Port Selection:	Push Button or Hot-Key Commands
Auto-Scan Intervals:	4 seconds
Switching Confirmation:	Beeping sound
Keyboard State:	Saved and restored
Power Supply:	Draw power from computer's keyboard port.
Dimensions:	95 x 65 x 30 mm (3.7 x 2.6 x 1.2 in.)
Weight:	85g (3oz)
Operating Temperature:	0° ~ 40°C (32° ~104° F)
Storage Temperature:	-20° ~ 60°C (-4° ~ 140° F)
Humidity:	0%~80%, Non-Condensing
Certifications:	FCC and CE

Troubleshooting

Q1: Where is the power supply? I did not find one in the box.

A1: The TK-205K does not require a power supply. It draws power from your computer's PS/2 connections. As long as your KVM switch is connected to the PS/2 port, it will receive the necessary power to function.

Q2: I have the KVM switch connected properly, but my keyboard and mouse don't work.

A2: Please make sure your PS/2 ports are working properly by testing it with another mouse or keyboard. Once you confirm that the PS/2 ports are functional, please reboot your computers, and try to use the KVM switch again.

Q3: Can I connect and disconnect the KVM cables while the computers are turned on?

A3: Yes, you can connect or disconnect the KVM cables while the computers are turned on, because the interface is Hot-Pluggable.

Q4: Will the KVM switch remember the keyboard settings between computers?

A4: Yes, the KVM switch will remember the keyboard settings when switching between your computers. (i.e.: Caps lock, Num key, etc.)

Q5: How do I switch from one computer to another with the KVM switch?

A5: Because the TK-205K KVM switch supports Hot-Key commands, you can use Hot-Key commands to switch between 2 computers.

If you have further questions, please contact TRENDnet's Technical Support Department.

Certifications

This equipment has been tested and found to comply with FCC and CE Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received.
Including interference that may cause undesired operation.



NOTE: THE MANUFACTURER IS NOT RESPONSIBLE FOR ANY RADIO OR TV INTERFERENCE CAUSED BY UNAUTHORIZED MODIFICATIONS TO THIS EQUIPMENT. SUCH MODIFICATIONS COULD VOID THE USER'S AUTHORITY TO OPERATE THE EQUIPMENT.

Limited Warranty

TRENDnet warrants its products against defects in material and workmanship, under normal use and service, for the following lengths of time from the date of purchase.

Wired Products - 5 Years Warranty

If a product does not operate as warranted above during the applicable warranty period, TRENDnet shall, at its option and expense, repair the defective product or part, deliver to customer an equivalent product or part to replace the defective item, or refund to customer the purchase price paid for the defective product. All products that are replaced will become the property of TRENDnet. Replacement products may be new or reconditioned.

TRENDnet shall not be responsible for any software, firmware, information, or memory data of customer contained in, stored on, or integrated with any products returned to TRENDnet pursuant to any warranty.

There are no user serviceable parts inside the product. Do not remove or attempt to service the product by any unauthorized service center. This warranty is voided if (i) the product has been modified or repaired by any unauthorized service center, (ii) the product was subject to accident, abuse, or improper use (iii) the product was subject to conditions more severe than those specified in the manual.

Warranty service may be obtained by contacting TRENDnet office within the applicable warranty period for a Return Material Authorization (RMA) number, accompanied by a copy of the dated proof of the purchase. Products returned to TRENDnet must be pre-authorized by TRENDnet with RMA number marked on the outside of the package, and sent prepaid, insured and packaged appropriately for safe shipment.

WARRANTIES EXCLUSIVE: IF THE TRENDNET PRODUCT DOES NOT OPERATE AS WARRANTED ABOVE, THE CUSTOMER'S SOLE REMEDY SHALL BE, AT TRENDNET'S OPTION, REPAIR OR REPLACEMENT. THE FOREGOING WARRANTIES AND REMEDIES ARE EXCLUSIVE AND ARE IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, EITHER IN FACT OR BY OPERATION OF LAW, STATUTORY OR OTHERWISE, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. TRENDNET NEITHER ASSUMES NOR AUTHORIZES ANY OTHER PERSON TO ASSUME FOR IT ANY OTHER LIABILITY IN CONNECTION WITH THE SALE, INSTALLATION MAINTENANCE OR USE OF TRENDNET'S PRODUCTS.

TRENDNET SHALL NOT BE LIABLE UNDER THIS WARRANTY IF ITS TESTING AND EXAMINATION DISCLOSE THAT THE ALLEGED DEFECT IN THE PRODUCT DOES NOT EXIST OR WAS CAUSED BY CUSTOMER'S OR ANY THIRD PERSON'S MISUSE, NEGLIGENCE, IMPROPER INSTALLATION OR TESTING, UNAUTHORIZED ATTEMPTS TO REPAIR OR MODIFY, OR ANY OTHER CAUSE BEYOND THE RANGE OF THE INTENDED USE, OR BY ACCIDENT, FIRE, LIGHTNING, OR OTHER HAZARD.

LIMITATION OF LIABILITY: TO THE FULL EXTENT ALLOWED BY LAW TRENDNET ALSO EXCLUDES FOR ITSELF AND ITS SUPPLIERS ANY LIABILITY, WHETHER BASED IN CONTRACT OR TORT (INCLUDING NEGLIGENCE), FOR INCIDENTAL, CONSEQUENTIAL, INDIRECT, SPECIAL, OR PUNITIVE DAMAGES OF ANY KIND, OR FOR LOSS OF REVENUE OR PROFITS, LOSS OF BUSINESS, LOSS OF INFORMATION OR DATA, OR OTHER FINANCIAL LOSS ARISING OUT OF OR IN CONNECTION WITH THE SALE, INSTALLATION, MAINTENANCE, USE, PERFORMANCE, FAILURE, OR INTERRUPTION OF THE POSSIBILITY OF SUCH DAMAGES, AND LIMITS ITS LIABILITY TO REPAIR, REPLACEMENT, OR REFUND OF THE PURCHASE PRICE PAID, AT TRENDNET'S OPTION. THIS DISCLAIMER OF LIABILITY FOR DAMAGES WILL NOT BE AFFECTED IF ANY REMEDY PROVIDED HEREIN SHALL FAIL OF ITS ESSENTIAL PURPOSE.

Governing Law: This Limited Warranty shall be governed by the laws of the state of California.

AC/DC Power Adapter, Cooling Fan, and Power Supply carry 1 Year Warranty



TRENDnet

Product Warranty Registration

Please take a moment to register your product online.
Go to TRENDnet's website at <http://www.TRENDNET.com>

TRENDnet Technical Support

US/Canada Support Center

Contact

Telephone: 1(888) 777-1550

Fax: 1(310) 626-6267

Email: support@trendnet.com

Tech Support Hours

7:30am - 6:00pm Pacific Standard Time
Monday - Friday

European Support Center

Contact**Telephone**

Deutsch : +49 (0) 6331 / 268-460

Français : +49 (0) 6331 / 268-461

0800-907-161 (numéro vert)

Español : +49 (0) 6331 / 268-462

English : +49 (0) 6331 / 268-463

Italiano : +49 (0) 6331 / 268-464

Dutch : +49 (0) 6331 / 268-465

Fax: +49 (0) 6331 / 268-466

Tech Support Hours

8:00am - 6:00pm Middle European Time
Monday - Friday

TRENDnet

3135 Kashiwa Street. Torrance, CA 90505

<http://www.TRENDNET.com>