

# TK-205K

## User's Guide

Version 10.11.05



# Table of Contents

Español .....	1
1. Preparación para la instalación .....	1
2. Introducción .....	2
3. Instalación .....	3
4. Funcionamiento .....	4
Specifications .....	5
Troubleshooting .....	6

## 1. Preparación para la instalación

### Verificación de los contenidos del paquete

Verifique que su caja contiene todo lo que incluimos en ella:



TK-205K



Guía del usuario

El conmutador TK-205KR de 2 puertos PS/2 KVM es compatible prácticamente con todos los PCs y sistemas operativos. Sólo necesita un monitor, un teclado PS/2 y un ratón PS/2.

## 2. Introducción

El TK-205K es un conmutador KVM de 2 puertos que incluye dos juegos de cable combinados KVM. Este conmutador KVM le permite manejar y controlar dos PCs utilizando un único monitor, un teclado PS/2 y un ratón PS/2.

### **Compatibilidad de Hardware**

El TK-205K es compatible con la plataforma PC. El TK-205K es también compatible con prácticamente todos los ratones PS/2, incluidos los ratones Intellimouse de Microsoft, Optical Mouse de Microsoft y Net Mouse de Logitech.

### **Compatibilidad de Software**

El TK-205K no requiere de ningún controlador o software. Es compatible con los siguientes sistemas operativos: Windows 98/ME/2000/XP/2003 Server, Netware, Unix y Linux.

### **Plug-and-Play y Hot-Pluggable**

El TK-205K se conecta a su PC vía el interfaz PS/2 para una funcionalidad Plug-and-Play conveniente y hot-pluggability.


### **Comandos hotkey**

Los comandos hotkey le permiten la conexión entre sus diferentes PCs de manera rápida y fácil.

Al incluir un gran número de funciones en un espacio muy reducido, el conmutador KVM TK-205K de TRENDnet es perfecto para uso tanto en casa como en la oficina.

## 3. Instalación

1. Apague ambos PCs y sus periféricos y desconecte todos los cables de alimentación.
2. Conecte el teclado compartido, el monitor y el ratón a sus respectivos puertos en el conmutador KVM. Las entradas del TK-205K están codificadas en colores para su propia comodidad.
3. Conecte cada juego de cables KVM al TK-205K así como los puertos PS/2 de cada PC y los vídeos conectores.
4. Encienda ambos PCs. Después de que ambos PCs se hayan iniciado completamente, podrá comenzar a trabajar con el conmutador KVM. **La instalación de la unidad ha finalizado.**

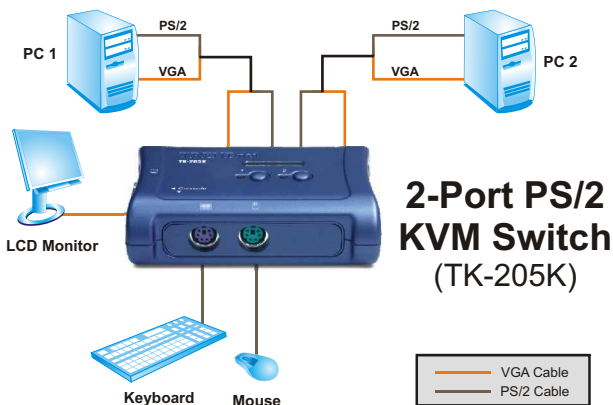

## 4. Funcionamiento

Para alternar entre ambos PCs, debe utilizar los comandos hotkey.

### Comandos Hotkey

Un comando hotkey del teclado consiste en pulsar tres teclas:  
Consulte la siguiente página para más información.

### Comando Hotkey = ScrLk + ScrLk + Tecla(s) de comando

Después de pulsar la tecla ScrLk, dispone de 2 segundos para pulsar la tecla ScrLk otra vez. Ahora dispone de 2 segundos para presionar una tecla de comando. Si usted no pulsa una tecla en el plazo de 2 segundos, el conmutador saldrá del modo hotkey.


Hoja de referencia rápida para el TK-205K		
Comando	Hotkeys	Descripción
Seleccione PC	ScrLk + ScrLk + X <sup>1</sup> <small>(x es una tecla de número de la primera línea) x = 1 ~ 2 para el número de canal de la PC</small>	Seleccione el canal PC activo.
Próximo canal PC inferior	ScrLk + ScrLk + ↑ (flecha arriba)	Seleccione el siguiente canal PC inferior conectado.
Próximo canal PC superior	ScrLk + ScrLk + ↓ (flecha abajo)	Seleccione el próximo canal PC superior conectado.
Auto-exploración	ScrLk + ScrLk + S	Auto-exploración a través de cada canal para una rápida lectura en pantalla de cada canal.
Detener Auto-exploración	Press any key on keyboard	Finalizar actividad de Auto-exploración.

### NOTA

1. Tenga en cuenta que x equivale a una tecla de número para el número de puerto seleccionado. (x = 1 ó 2). Utilice solamente las teclas de número de La línea superior del teclado.

### Convención Hotkey:

La pulsación de la tecla hotkey



indica que debe pulsar la tecla individual consecutivamente una después de otra, no simultáneamente.

# Specifications

<b>Computer Connections:</b>	2
<b>KVM Cable:</b>	2 Sets of 1.2M (4ft) KVM Cables
<b>Port Connectors:</b>	Keyboard & Mouse: PS/2 type 6-pin mini Din (female). Monitor: 15-pin HDDB type (female)
<b>Console Port:</b>	1
<b>Manual Selection:</b>	Push Button
<b>Port Selection:</b>	Push Button or Hot-Key Commands
<b>Auto-Scan Intervals:</b>	4 seconds
<b>Switching Confirmation:</b>	Beeping sound
<b>Keyboard State:</b>	Saved and restored
<b>Power Supply:</b>	Draw power from computer's keyboard port.
<b>Dimensions:</b>	95 x 65 x 30 mm (3.7 x 2.6 x 1.2 in.)
<b>Weight:</b>	85g (3oz)
<b>Operating Temperature:</b>	0° ~ 40°C (32° ~ 104° F)
<b>Storage Temperature:</b>	-20° ~ 60°C (-4° ~ 140° F)
<b>Humidity:</b>	0%~80%, Non-Condensing
<b>Certifications:</b>	FCC and CE

# Troubleshooting

**Q1: Where is the power supply? I did not find one in the box.**

**A1:** The TK-205K does not require a power supply. It draws power from your computer's PS/2 connections. As long as your KVM switch is connected to the PS/2 port, it will receive the necessary power to function.

**Q2: I have the KVM switch connected properly, but my keyboard and mouse don't work.**

**A2:** Please make sure your PS/2 ports are working properly by testing it with another mouse or keyboard. Once you confirm that the PS/2 ports are functional, please reboot your computers, and try to use the KVM switch again.

**Q3: Can I connect and disconnect the KVM cables while the computers are turned on?**

**A3:** Yes, you can connect or disconnect the KVM cables while the computers are turned on, because the interface is Hot-Pluggable.

**Q4: Will the KVM switch remember the keyboard settings between computers?**

**A4:** Yes, the KVM switch will remember the keyboard settings when switching between your computers. (i.e.: Caps lock, Num key, etc.)

**Q5: How do I switch from one computer to another with the KVM switch?**

**A5:** Because the TK-205K KVM switch supports Hot-Key commands, you can use Hot-Key commands to switch between 2 computers.

If you have further questions, please contact TRENDnet's Technical Support Department.

## Certifications

This equipment has been tested and found to comply with FCC and CE Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received.  
Including interference that may cause undesired operation.



**NOTE:** THE MANUFACTURER IS NOT RESPONSIBLE FOR ANY RADIO OR TV INTERFERENCE CAUSED BY UNAUTHORIZED MODIFICATIONS TO THIS EQUIPMENT. SUCH MODIFICATIONS COULD VOID THE USER'S AUTHORITY TO OPERATE THE EQUIPMENT.



## Limited Warranty

TRENDnet warrants its products against defects in material and workmanship, under normal use and service, for the following lengths of time from the date of purchase.

### Wired Products - 5 Years Warranty

If a product does not operate as warranted above during the applicable warranty period, TRENDnet shall, at its option and expense, repair the defective product or part, deliver to customer an equivalent product or part to replace the defective item, or refund to customer the purchase price paid for the defective product. All products that are replaced will become the property of TRENDnet. Replacement products may be new or reconditioned.

TRENDnet shall not be responsible for any software, firmware, information, or memory data of customer contained in, stored on, or integrated with any products returned to TRENDnet pursuant to any warranty.

There are no user serviceable parts inside the product. Do not remove or attempt to service the product by any unauthorized service center. This warranty is voided if (i) the product has been modified or repaired by any unauthorized service center, (ii) the product was subject to accident, abuse, or improper use (iii) the product was subject to conditions more severe than those specified in the manual.

Warranty service may be obtained by contacting TRENDnet office within the applicable warranty period for a Return Material Authorization (RMA) number, accompanied by a copy of the dated proof of the purchase. Products returned to TRENDnet must be pre-authorized by TRENDnet with RMA number marked on the outside of the package, and sent prepaid, insured and packaged appropriately for safe shipment.

WARRANTIES EXCLUSIVE: IF THE TRENDNET PRODUCT DOES NOT OPERATE AS WARRANTED ABOVE, THE CUSTOMER'S SOLE REMEDY SHALL BE, AT TRENDNET'S OPTION, REPAIR OR REPLACEMENT. THE FOREGOING WARRANTIES AND REMEDIES ARE EXCLUSIVE AND ARE IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, EITHER IN FACT OR BY OPERATION OF LAW, STATUTORY OR OTHERWISE, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. TRENDNET NEITHER ASSUMES NOR AUTHORIZES ANY OTHER PERSON TO ASSUME FOR IT ANY OTHER LIABILITY IN CONNECTION WITH THE SALE, INSTALLATION MAINTENANCE OR USE OF TRENDNET'S PRODUCTS.

TRENDNET SHALL NOT BE LIABLE UNDER THIS WARRANTY IF ITS TESTING AND EXAMINATION DISCLOSE THAT THE ALLEGED DEFECT IN THE PRODUCT DOES NOT EXIST OR WAS CAUSED BY CUSTOMER'S OR ANY THIRD PERSON'S MISUSE, NEGLIGENCE, IMPROPER INSTALLATION OR TESTING, UNAUTHORIZED ATTEMPTS TO REPAIR OR MODIFY, OR ANY OTHER CAUSE BEYOND THE RANGE OF THE INTENDED USE, OR BY ACCIDENT, FIRE, LIGHTNING, OR OTHER HAZARD.

LIMITATION OF LIABILITY: TO THE FULL EXTENT ALLOWED BY LAW TRENDNET ALSO EXCLUDES FOR ITSELF AND ITS SUPPLIERS ANY LIABILITY, WHETHER BASED IN CONTRACT OR TORT (INCLUDING NEGLIGENCE), FOR INCIDENTAL, CONSEQUENTIAL, INDIRECT, SPECIAL, OR PUNITIVE DAMAGES OF ANY KIND, OR FOR LOSS OF REVENUE OR PROFITS, LOSS OF BUSINESS, LOSS OF INFORMATION OR DATA, OR OTHER FINANCIAL LOSS ARISING OUT OF OR IN CONNECTION WITH THE SALE, INSTALLATION, MAINTENANCE, USE, PERFORMANCE, FAILURE, OR INTERRUPTION OF THE POSSIBILITY OF SUCH DAMAGES, AND LIMITS ITS LIABILITY TO REPAIR, REPLACEMENT, OR REFUND OF THE PURCHASE PRICE PAID, AT TRENDNET'S OPTION. THIS DISCLAIMER OF LIABILITY FOR DAMAGES WILL NOT BE AFFECTED IF ANY REMEDY PROVIDED HEREIN SHALL FAIL OF ITS ESSENTIAL PURPOSE.

Governing Law: This Limited Warranty shall be governed by the laws of the state of California.

AC/DC Power Adapter, Cooling Fan, and Power Supply carry 1 Year Warranty



# TRENDnet

## Product Warranty Registration

Please take a moment to register your product online.  
Go to TRENDnet's website at <http://www.TRENDNET.com>

### TRENDnet Technical Support

#### US/Canada Support Center

**Contact**

**Telephone:** 1(888) 777-1550

**Fax:** 1(310) 626-6267

**Email:** [support@trendnet.com](mailto:support@trendnet.com)

**Tech Support Hours**

7:30am - 6:00pm Pacific Standard Time  
Monday - Friday

#### European Support Center

**Contact****Telephone**

Deutsch : +49 (0) 6331 / 268-460

Français : +49 (0) 6331 / 268-461

0800-907-161 (numéro vert)

Español : +49 (0) 6331 / 268-462

English : +49 (0) 6331 / 268-463

Italiano : +49 (0) 6331 / 268-464

Dutch : +49 (0) 6331 / 268-465

**Fax:** +49 (0) 6331 / 268-466

**Tech Support Hours**

8:00am - 6:00pm Middle European Time  
Monday - Friday

**TRENDnet**

3135 Kashiwa Street. Torrance, CA 90505

<http://www.TRENDNET.com>