

# TRENDnet®



## Quick Installation Guide

---

### TEG-082WS (V2)

# Table of Contents

---

## **1 English**

1. Before You Start
2. Hardware Installation and Configuration

# 1. Before You Start

---

## Package Contents

- TEG-082WS
- Quick Installation Guide
- CD-ROM (Utility and User's Guide)
- Power cord (1.8m / 6 ft.)
- Rack mount kit


## Minimum Requirements

- Computer with an Ethernet port and web browser
- Network cable

## Optional Equipment

- EIA standard 19" rack
- SFP modules (e.g. TE100-MGBFX, TEG-MGBSX, TEG-MGBS10, TEG-MGBS40, TEG-MGBS80)

## 2. Hardware Installation and Configuration

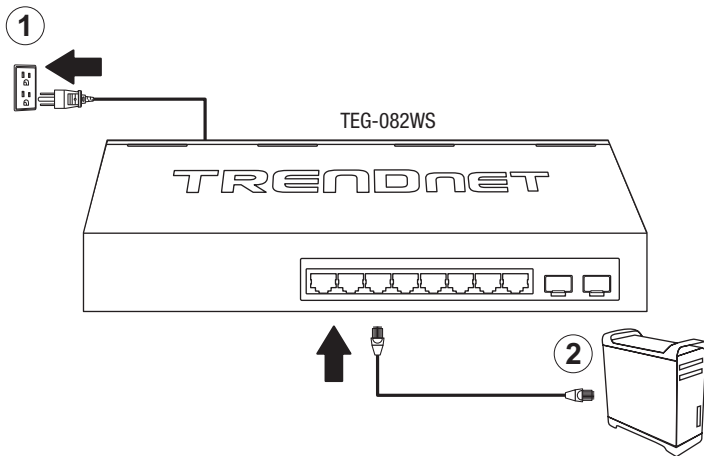

3. Assign a Static IP address to your computer's network adapter in the subnet of 192.168.10.x (e.g. 192.168.10.25) and a subnet mask of 255.255.255.0.
4. Open your web browser, type the IP address of the switch in the address bar, and then press **Enter**. The default IP address is 192.168.10.200.



5. Enter the **User name** and **Password**, and then click **Login**. By default:

User Name: **admin**

Password: **admin**

**Note:** User Name and Password are case sensitive.

admin

admin

LOGIN

LOGIN

6. Click **System** and then click **IPv4 Setup**.

7. Configure the switch to match the requirements of your network. Then click **Apply** to save changes.

System

IPv4 Setup

Switch Info

System

- System Management
- IPv4 Setup
- IPv6 Setup
- IPv6 Neighbor
- DNS
- IP Access List
- Administration
- Timeout
- System Time
- SSL
- DHCP Auto Configuration

IPv4 Setup

IPv4 Setup

System MAC Address: 00:01:02:03:04:05

System IP Address: 192 . 168 . 10 . 200

System Subnet Mask: 255 . 255 . 255 . 0

System Default Gateway: 0 . 0 . 0 . 0

System IP Mode: Static

Apply

Apply

8. Click **OK**.

WARNING


The management session will be disconnected. Use new IP address to connect to device.

OK


OK Cancel

9. In the left hand panel, click **Tools**, click on **Configuration**, and click **Save**.

10. Click **Save Settings to Flash** (button).

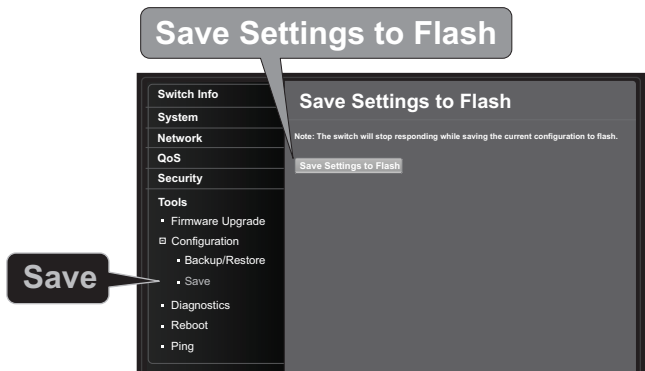

11. Click **OK**.

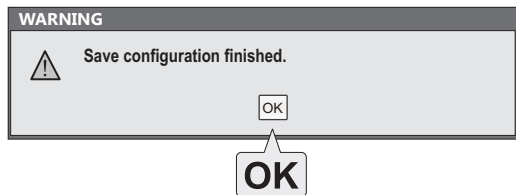

**Note:**

1. If you would like to easily discover all the Web Management Switches on the network, assign IP address, change password, then install the Web Smart Switch Management Utility. Follow the steps provided on the user's guide.
2. To download the latest version of the user's guide and the utility, please go to <http://www.trendnet.com/support> and select the **TEG-082WS** from the products drop down list.

For detailed information regarding the **TEG-082WS**'s configuration and advanced settings, please refer to the User's Guide on the provided CD-ROM.

# Declaration of Conformity

TRENDnet<sup>®</sup>

## Manufacturer's Name and Address

TRENDnet, Inc.  
20675 Manhattan Place  
Torrance, CA 90501 USA

Zwolsestraat 156 2587 WB  
The Hague The Netherlands



## Product Information:

**Model Number:** TEG-082WS  
**Product Name:** 10-Port Gigabit Web Smart Switch  
**Trade Name:** TRENDnet

TRENDnet hereby declare that the product is in compliance with the essential requirements and other relevant provisions under our sole responsibility.

**Safety** EN 60950-1:2006+A11:2009+A1:2010+A12:2011+A2:2013

**EMC** EN 55032:2012+AC: 2013 (CISPR32:2012) (Class A)  
EN 61000-3-2:2014  
EN 61000-3-3:2013  
EN 55024:2010  
AS/NZS CISPR 32:2013

This product is herewith confirmed to comply with the Directives

## Directives

EMC Directive 2014/30/EU  
RoHS Directive 2011/65/EU  
WEEE Directive 2012/19/EU  
REACH Regulation (EC) No. 1907/2006  
Low Voltage Directive 2014/35/EC

Person responsible for this declaration.

Place of Issue: Torrance, California, USA

Date: June 07, 2017

Name: Sonny Su

Title: Director of Technology

Signature:

A handwritten signature in black ink, appearing to read 'Sonny Su', is written over a horizontal line.



# TRENDNET<sup>®</sup>

---

## Certifications

This device complies with Part 15 of the FCC Rules.

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received.

Including interference that may cause undesired operation.



Waste electrical and electronic products must not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or Retailer for recycling advice.

Applies to PoE Products Only: This product is to be connected only to PoE networks without routing to the outside plant.

## Note

The Manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.

## Advertencia

En todos nuestros equipos se mencionan claramente las características del adaptador de alimentación necesario para su funcionamiento. El uso de un adaptador distinto al mencionado puede producir daños físicos y/o daños al equipo conectado. El adaptador de alimentación debe operar con voltaje y frecuencia de la energía eléctrica domiciliar existente en el país o zona de instalación.

## Technical Support

If you have any questions regarding the product installation, please contact our Technical Support.

Toll free US/Canada: **1-866-845-3673**

Regional phone numbers available at [www.trendnet.com/support](http://www.trendnet.com/support)

## TRENDnet

20675 Manhattan Place  
Torrance, CA 90501  
USA

## Product Warranty Registration

Please take a moment to register your product online. Go to TRENDnet's website at: [www.trendnet.com/register](http://www.trendnet.com/register)