



TRENDnet



Quick Installation Guide



TEG-S081Fi

Table of Contents

Français	1
1. Avant de commencer	1
2. Comment effectuer les connexions	2
3. Utilisation du Switch	3
Troubleshooting	5


1. Avant de commencer



Configuration du système

- Des postes de travail équipés de cartes réseau
- Le protocole TCP/IP installé sur chaque ordinateur.
- Un navigateur Internet tel Internet Explorer ou Netscape Navigator
- Câble fibre multimode avec prise de type SC.
- Convertisseurs fibre multimode avec des prises de type SC ou un switch avec un port fibre de type SC.

**8-Port 100Base-FX Layer 2 Managed Switch with GBIC Slot
(TEG-S081Fi)**

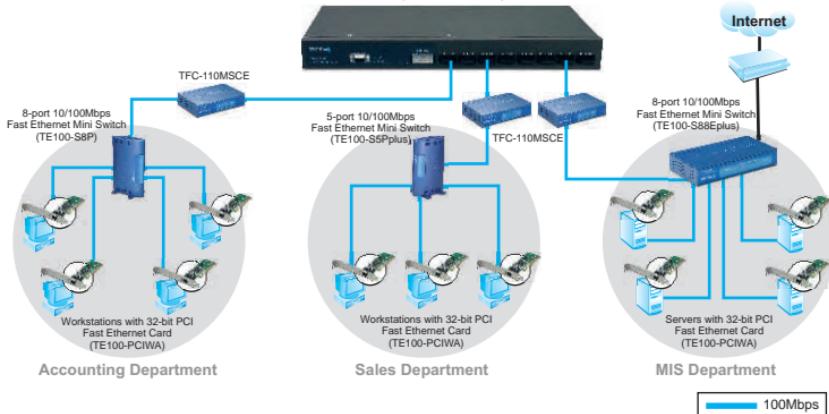

2. Comment effectuer les connexions

1. Branchez le cordon d'alimentation à l'arrière du TEG-S081Fi.




2. Branchez le câble fibre à l'avant du switch.


3. Vérifiez que le voyant **PWR** est vert et ne clignote pas.

3. Utilisation du Switch

1. Allez sur Start (Démarrer) ?
Settings (Paramètres) ?
Control Panel (Panneau de configuration).

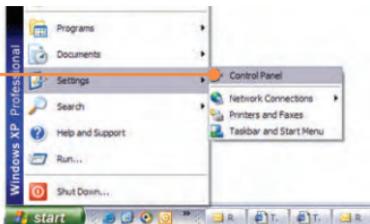


2. Double-cliquez sur l'icône Network Connection (Connexions réseau).

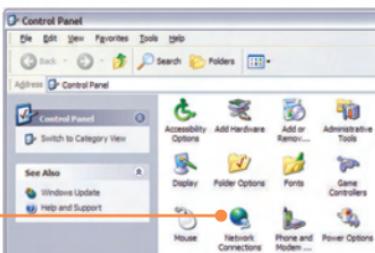


3. Faites un clic droit sur l'icône Local Area Connection (Connexions au réseau local) et cliquez ensuite sur Properties (Propriétés).



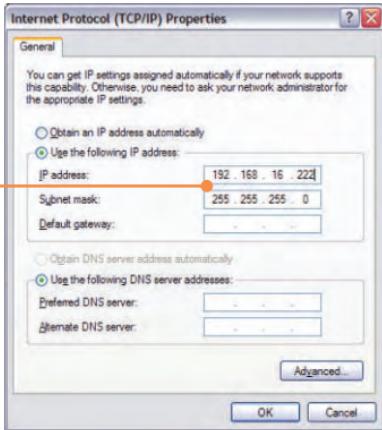

4. Veuillez configurer l'adresse IP de votre PC sur **192.168.16.x**.

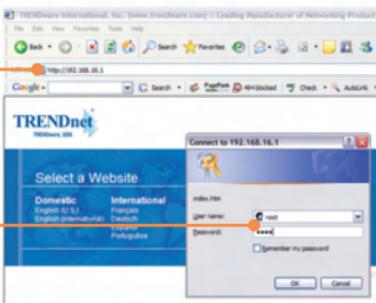

5. Ouvrez votre navigateur Internet, tapez-y **http://192.168.16.1**, et enfoncez la touche **Enter**.
6. Nom d'utilisateur : root
Mot de passe : root



7. Sélectionnez l'option adéquate permettant de configurer le switch SNMP.

L'installation est maintenant complète.

Remarque : Pour plus d'informations sur les fonctions avancées, veuillez consulter le guide de l'utilisateur.


Troubleshooting

Q1. How come I cannot see any light from any of my LED's?

A1. Your TEG-S081Fi is not getting any power. Make sure that your surge protector or your outlet is getting power and make sure that the AC Power cord is properly connected to your TEG-S081Fi.

Q2. I connected my fiber converter to the TEG-S081Fi using a Multimode Fiber cable with SC connectors. However, the network activity LED does not blink. What should I do?

A2. Go to the TEG-S081Fi and move the connector that was in the **transmit** side to the **receive** side, and the other connector that was in the **receive** side to the **transmit** side.



Q3. I changed my IP settings to 192.168.16.222 to access the switch, but I still cannot get into the Web configuration page. What should I do?

A3. Make sure there is no other network device using the same IP address. Afterwards, consult the User's Guide to access the switch through the Console Port. Once you reach the command line interface, perform a factory reset and try again.

Q4. I performed a factory reset on the TEG-S081Fi, but I still cannot access the web configuration page. What should I do?

A4. If you are configuring more than one TEG-S081Fi, then it is possible that you are experiencing IP conflict between these two switches. Please configure each switch one at a time, and make sure you assign a unique IP address to each switch.

If you have any questions regarding the TEG-S081Fi, please contact TRENDnet's Technical Support Department.

Certifications

This equipment has been tested and found to comply with FCC and CE Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received.
Including interference that may cause undesired operation.



Waste electrical and electronic products
must not be disposed of with household
waste. Please recycle where facilities
exist. Check with your Local Authority or
Retailer for recycling advice.



NOTE: THE MANUFACTURER IS NOT RESPONSIBLE FOR ANY RADIO OR TV INTERFERENCE CAUSED BY UNAUTHORIZED MODIFICATIONS TO THIS EQUIPMENT. SUCH MODIFICATIONS COULD VOID THE USER'S AUTHORITY TO OPERATE THE EQUIPMENT.



TRENDNET

TRENDnet Technical Support

US/Canada Support Center European Support Center

Contact

Telephone: 1(866) 845-3673

Email: support@trendnet.com

Tech Support Hours

24/7 Toll Free Tech Support



Contact

Telephone:

Deutsch : +49 (0) 6331 / 268-460

Français : +49 (0) 6331 / 268-461

0800-90-71-61 [numéro vert]

Español : +49 (0) 6331 / 268-462

English : +49 (0) 6331 / 268-463

Italiano : +49 (0) 6331 / 268-464

Dutch : +49 (0) 6331 / 268-465

Fax: +49 (0) 6331 / 268-466

Tech Support Hours

8:00am - 6:00pm

Middle European Time

Monday - Friday

Product Warranty Registration

Please take a moment to register your product online.
Go to TRENDnet's website at <http://www.trendnet.com>

TRENDNET

3135 Kashiwa Street
Torrance, CA 90505
USA