




Lühike paigaldusjuhend 

TEG-S50g  
3.01

Eesti	1
1. Enne alustamist	1
2. Riistvara paigaldamine	3
3. LED'id	4
Tehnilised spetsifikatsioonid	5
Tõrkeotsing	6






## Pakendi sisu

- TEG-S50g
- Mitmekeelne lühike paigaldusjuhend
- Toiteplokk (5V DC, 1A)

## Minimaalsed nõuded süsteemile

- Arvuti, millel on korralikult töötav võrgukaart
- Cat-5E või CAT-6 RJ-45 arvutivõrgukaabel
- Alus, mis kannab vähemalt 1.5 kg switchi
- Toitepistik, mis on vähemalt 1.82 meetri kaugusel switchist
- Visuaalselt kontrollida toitepistikut, et olla kindel, et see ühendub kindlalt toiteplokkiga
- Veenduda, et koht kuhu paigaldada switch, on piisavalt ventileeritud
- Ärge paigaldage switchile raskeid esemeid

## Rakendus

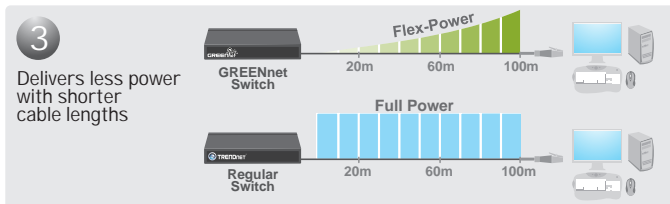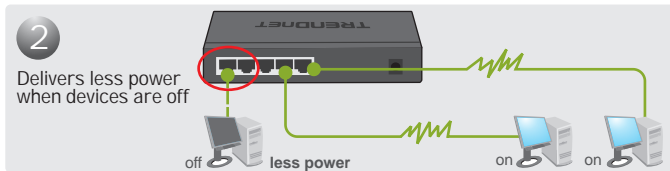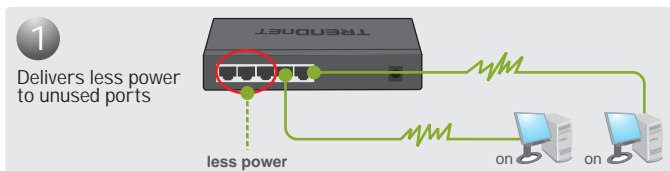

\*Max power savings compared with standard TRENDnet switches.

1. Ühendage toiteplokk TEG-S50g külge ning seejärel pistikupessa.



2. Ühendage arvutist CAT-5 RJ-45 võrgukaabel vabasse TEG-S50g Etherneti porti.



Power (Toide)  
Roheline: Toide on sees  
Ei helenda: Toide on valjas.



Link/ACT  
Roheline(poleb): Teise seadmega on uhendus.  
Roheline(vilgub): Toimub andmete vahetus.  
Ei helenda: Pordis ei toimu midagi.



Speed  
Roheline: Port on 2000Mbps uhenduses (Full)  
Kollane:  
Port on 10/20Mbps (Half/Full), 100/200Mbps  
(Half/Full) uhenduses voi port ei ole uhenduses.

Hardware	
Standards	IEEE 802.3 10Base-T IEEE 802.3u 100Base-TX IEEE 802.3ab 1000Base-T IEEE 802.3x Flow Control IEEE 802.3 az (draft 2.0)
Network Media	Ethernet: Cat. 3, 4, 5, up to 100m Fast Ethernet: Cat. 5, up to 100m Gigabit Ethernet: Cat. 5, 5e, 6, up to 100m
Data Rate	Ethernet: 10Mbps/20Mbps (half/full-duplex) Fast Ethernet: 100Mbps/200Mbps (half/full-duplex) Gigabit Ethernet: 2000Mbps (full-duplex)
Protocol/Topology	CSMA/CD, Star
Power Consumption	3 Watts (max)
Switch Fabric	10Gbps forwarding capacity
Interface	5 x 10/100/1000Mbps Auto-MDIX RJ-45 ports
Data RAM Buffer	128KBytes
Filtering Table	8K entries
Jumbo Frame Support	9216Bytes
Diagnostic LEDs	Power, Link/ACT, 100Mbps/1000Mbps
Power Adapter	5V DC, 1A external power adapter
Dimension	116 x 25 x 70mm (4.57 x 0.98 x 2.76 in.)
Weight	225 g (7.8 oz)
Temperature	Operating: 0° ~ 40° C (32° ~ 104° F) Storage: -10° ~ 70° C (14° ~ 158° F)
Humidity	Max. 90% (non-condensing)
Certifications	FCC, CE

\* Max power savings compared with standard TRENDnet switches.

1. Pärast switchi ühendamist pistikupesasse ei hakka LED-tuled põlema.  
Kontrollige välissteiteploki ühendust TEG-S50g seadme ja pistikupesaga.  
Samuti veenduge, kas vool tuleb pistikupesasse.
2. WKui ma ühendan arvuti ühte switchi porti, siis küll Link/ACT LED süttib, aga ma ei saa Gigabitist ühendust.
  1. Kontrollige, kas LEDid helendavad. Kui 100/1000 LED helendub kollaselt, siis arvuti kiirus on 100. Kui 100/1000Mbps LED ei helendu, siis arvuti ühenduskiirus on 10Mbps.
  2. Kontrollige Etherneti kaablit, veenduge, et Te kasutate CAT-5E või CAT-6 Etherneti kaablit. Mõned CAT-5 kaablid ei suuda edastada Gigabit kiirust.
  3. Veenduge, kas Teie arvutisse on paigaldatud Gigabit Ethernet võrgukaart.
3. Pärast arvuti ühendamist switchiga ei saa ma faile jagada.
  1. Kontrollige switchi LED- tulesid. Veenduge, et LINK/ACT LED-tuli põleb.
  2. Kontrollige võrgukaablit. Kaabli minimaalne pikkus on 1,5 meetrit ja maksimaalne pikkus 100 meetrit.
  3. Blokeerige igasugune tarkvara tulemüüri programm.
  4. Veenduge, et Teil on failijagamine lubatud. Täpsema informatsiooni saamiseks võtke ühendust operatsioonisüsteemi tehnilise toega.
4. Pärast arvuti ühendamist switchiga saan ma Internetti kasutada ainult ühest arvutist.  
See switch ei ole loodud jagama Internetti mitme arvuti vahel. Soovitame Teil soetada endale Internetiruuter, nagu näiteks TW100-S4W1CA.
5. Kus asub switchil uplink port?  
Kõik switchi pordid on Auto-MDIX, suvaline port suudab toimida uplink pordina.

Kui Teil endiselt esineb probleeme või on küsimusi TEG-S50g kohta, siis palun võtke ühendust TRENDneti tehnilise toe osakonnaga.



## Limited Warranty

TRENDnet warrants its products against defects in material and workmanship, under normal use and service, for the following lengths of time from the date of purchase.

### TEG-S50g - 3 Years Limited Warranty

AC/DC Power Adapter, Cooling Fan and Power Supply carry a 1 year limited warranty

If a product does not operate as warranted during the applicable warranty period, TRENDnet shall reserve the right, at its expense, to repair or replace the defective product or part and deliver an equivalent product or part to the customer. The repair/replacement unit's warranty continues from the original date of purchase. All products that are replaced become the property of TRENDnet. Replacement products may be new or reconditioned. TRENDnet does not issue refunds or credit. Please contact the point-of-purchase for their return policies.

TRENDnet shall not be responsible for any software, firmware, information, or memory data of customer contained in, stored on, or integrated with any products returned to TRENDnet pursuant to any warranty.

There are no user serviceable parts inside the product. Do not remove or attempt to service the product by any unauthorized service center. This warranty is voided if (i) the product has been modified or repaired by any unauthorized service center, (ii) the product was subject to accident, abuse, or improper use (iii) the product was subject to conditions more severe than those specified in the manual.

Warranty service may be obtained by contacting TRENDnet within the applicable warranty period and providing a copy of the dated proof of the purchase. Upon proper submission of required documentation a Return Material Authorization (RMA) number will be issued. An RMA number is required in order to initiate warranty service support for all TRENDnet products. Products that are sent to TRENDnet for RMA service must have the RMA number marked on the outside of return packages and sent to TRENDnet prepaid, insured and packaged appropriately for safe shipment. Customers shipping from outside of the USA and Canada are responsible for return shipping fees. Customers shipping from outside of the USA are responsible for custom charges, including but not limited to, duty, tax, and other fees.

WARRANTIES EXCLUSIVE: IF THE TRENDNET PRODUCT DOES NOT OPERATE AS WARRANTED ABOVE, THE CUSTOMER'S SOLE REMEDY SHALL BE, AT TRENDNET'S OPTION, REPAIR OR REPLACE. THE FOREGOING WARRANTIES AND REMEDIES ARE EXCLUSIVE AND ARE IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, EITHER IN FACT OR BY OPERATION OF LAW, STATUTORY OR OTHERWISE, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. TRENDNET NEITHER ASSUMES NOR AUTHORIZES ANY OTHER PERSON TO ASSUME FOR IT ANY OTHER LIABILITY IN CONNECTION WITH THE SALE, INSTALLATION MAINTENANCE OR USE OF TRENDNET'S PRODUCTS.

TRENDNET SHALL NOT BE LIABLE UNDER THIS WARRANTY IF ITS TESTING AND EXAMINATION DISCLOSE THAT THE ALLEGED DEFECT IN THE PRODUCT DOES NOT EXIST OR WAS CAUSED BY CUSTOMER'S OR ANY THIRD PERSON'S MISUSE, NEGLIGENCE, IMPROPER INSTALLATION OR TESTING, UNAUTHORIZED ATTEMPTS TO REPAIR OR MODIFY, OR ANY OTHER CAUSE BEYOND THE RANGE OF THE INTENDED USE, OR BY ACCIDENT, FIRE, LIGHTNING, OR OTHER HAZARD.

LIMITATION OF LIABILITY: TO THE FULL EXTENT ALLOWED BY LAW TRENDNET ALSO EXCLUDES FOR ITSELF AND ITS SUPPLIERS ANY LIABILITY, WHETHER BASED IN CONTRACT OR TORT (INCLUDING NEGLIGENCE), FOR INCIDENTAL, CONSEQUENTIAL, INDIRECT, SPECIAL, OR PUNITIVE DAMAGES OF ANY KIND, OR FOR LOSS OF REVENUE OR PROFITS, LOSS OF BUSINESS, LOSS OF INFORMATION OR DATE, OR OTHER FINANCIAL LOSS ARISING OUT OF OR IN CONNECTION WITH THE SALE, INSTALLATION, MAINTENANCE, USE, PERFORMANCE, FAILURE, OR INTERRUPTION OF THE POSSIBILITY OF SUCH DAMAGES, AND LIMITS ITS LIABILITY TO REPAIR, REPLACEMENT, OR REFUND OF THE PURCHASE PRICE PAID, AT TRENDNET'S OPTION. THIS DISCLAIMER OF LIABILITY FOR DAMAGES WILL NOT BE AFFECTED IF ANY REMEDY PROVIDED HEREIN SHALL FAIL OF ITS ESSENTIAL PURPOSE.

Governing Law: This Limited Warranty shall be governed by the laws of the state of California.

Some TRENDnet products include software code written by third party developers. These codes are subject to the GNU General Public License ("GPL") or GNU Lesser General Public License ("LGPL").

Go to <http://www.trendnet.com/gpl> or <http://www.trendnet.com> Download section and look for the desired TRENDnet product to access to the GPL Code or LGPL Code. These codes are distributed WITHOUT WARRANTY and are subject to the copyrights of the developers. TRENDnet does not provide technical support for these codes. Please go to <http://www.gnu.org/licenses/gpl.txt> or <http://www.gnu.org/licenses/lgpl.txt> for specific terms of each license.

PWP05202009v2

Sertifikaadid:

Seade on testitud ning vastab FCC ja CE reeglitele.

Seade vastab järgmistele tingimustele:

(1) Seade ei tohi põhjustada ohtlikke häireid.

(2) Seade peab võtma vastu kõiki signaale, sealhulgas signaale, mis võivad põhjustada soovimatuid häireid seadme töös.



Elektri- ja elektroonikatoodete jäätmeid ei tohi ära visata koos olmejäätikega. Abivahendite olemasolu korral palume ümbertöötlemiseks sorteerida. Jäätmete ümbertöötlemise kohta küsige nõu oma kohalikul jaemuujalt.



**MÄRKUS:** TOOTJA EI VASTUTA ÜHEGI TV VÕI RAADIO HÄIRE EEST, MIS ON PÕHJUSTATUD SEADME LUBAMATUST ÜMBEREHITAMISEST. IGASUGUNE ÜBERMODIFITSEERIMINE TÜHISTAB AUTORIVASTUTUSE SEADMELE.



## Product Warranty Registration

Please take a moment to register your product online.  
Go to TRENDnet's website at <http://www.trendnet.com/register>