


TE-TC BNC-to-UTP Transceiver

The TE-TC is a media converter that converts the 10Base-T Ethernet UTP medium to the thin Ethernet coaxial medium, and vice versa. It acts as low-cost Ethernet repeater, providing a UTP port for connection to a UTP cable segment, and a BNC port for connection to a thin coaxial cable segment.

The TE-TC is especially useful in connecting a small departmental workgroup to a main 10Base-T network. Applications of this media converter include connecting a group of stations located far away to a concentrator, saving for you both the installation of a more expensive 10Base-T hub and the cost and trouble of installing multiple segment cabling.

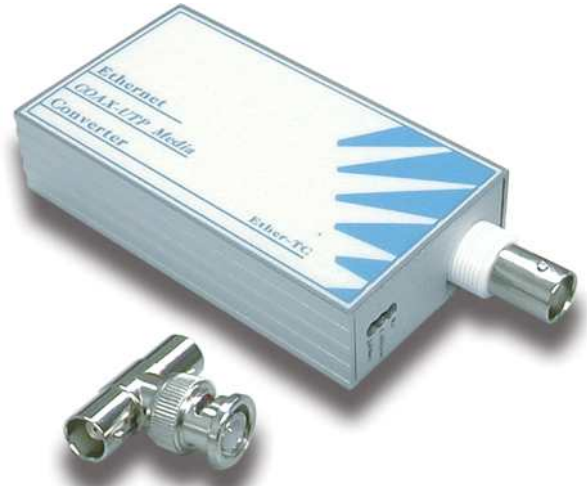

FEATURES

- Complies with IEEE 802.3 10Base-T and 10Base-2
- Built-in transceivers for direct interface to BNC and UTP media
- Collision detection and propagation
- LEDs for easy troubleshooting
- 10Mbps transfer rate
- 5 Year Warranty

SPECIFICATIONS

Standards: IEEE 802.3 10Base-T and 10Base-2

Ports: 1 BNC and 1 UTP

LEDs:

- BNC Port - Reception, collision, jabber
- UTP Port - Power/reception, link, collision

Dimensions: 80mm x 44mm x 18mm

Weight: 85 grams

AC Power Adapter:

- Input - AC 220V 60Hz, AC 120V 60Hz, or AC 100V 50/60H
- Output - DC 12V 500mA; Connector - Center positive, outside negative

Dimensions: 441mm x 123mm x 45mm

PRODUCT INFORMATION

- **TE-T2:** AUI-to-BNC Transceiver
- **TE-TT:** AUI-to-RJ-45 Transceiver
- **TE-TF:** AUI-to-ST Transceiver
- **TE-TFT:** UTP to ST Transceiver for Fiber Optic Cable
- **TE-TC:** BNC-to-UTP Transceiver

ORDERING INFORMATION

TRENDware International, Inc.
3135 Kashiwa Street
Torrance, CA. 90505. USA
Tel: 310-891-1100
Fax: 310-891-1111
Web: www.trendware.com
Email: sales@trendware.com

**To Order Please Call:
1-888-326-6061**