



## Quick Installation Guide



**TEW-637AP**

# Table of Contents

English .....	1
1. Before You Start .....	1
2. Hardware Installation .....	2
Português	
Para Guia de Instalação em Português, favor ver CD.	
Eesti	
Eestikeelse paigaldusjuhendi leiate kaasasolevalt CD-plaadilt.	
Troubleshooting .....	6

# 1. Before You Start



## Package Contents


- TEW-637AP
- User's Guide CD-ROM
- Quick Installation Guide
- AC Power Adapter (12V DC, 1A)
- 1 RJ-45 cable

## Installation Requirements

- Web Browser: Internet Explorer (6 or higher)
- A computer with a network adapter or wireless adapter properly installed.
- A router with an available network LAN port
- A RJ-45 network cable

## Application

### 300Mbps Wireless Easy-N-Upgrader™ (TEW-637AP)

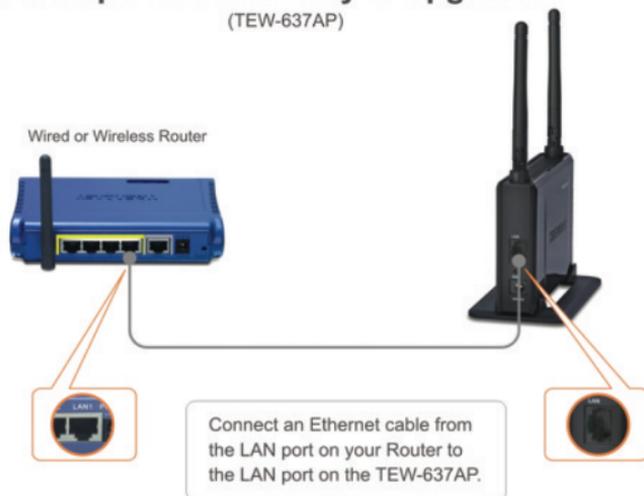

## 2. Hardware Installation

**Note:** Locate an optimum location for the Access Point. The best place for the Access Point is usually at the center of your wireless network. Please connect the computer configuring the TEW-637AP to the same router. It is recommended to use a wired computer to configure the TEW-637AP.

### For Windows Users

1. Insert Driver CD-ROM into your computer and then click **Setup Wizard**.



2. Click **I accept the terms in the License Agreement** and then click **Next**.



3. Connect an Ethernet cable from the LAN port on your Router to the LAN port on the TEW-637AP.



4. Connect the AC Power Adapter to the Access Point and then to a power outlet and then click **Next**.



5. Select the TEW-637AP from the List and then click **Configure**.



6. Enter the password and then click **Login**. By default, the password is **admin**.



7. The TEW-637AP will receive an IP Address automatically from your router. Copy down the IP Address and then click **Next**.




8. Select **Manual setup** and then click **Next**.



9. Enter a SSID and then click **Next**.  
By default, the SSID is  
**TRENDnet637**



10. Select a Security Mode and then  
click **Next** (example shows  
WPA-PSK).



11. Enter a Pre-Shared key and then  
click **Next**. For WPA-PSK or  
WPA2-PSK, the Pre-Shared Key  
must be between 8 and 64  
characters. Copy down the  
encryption key.




12. Click **Save** (optional).



**Note:** To connect a wireless computer to the TEW-637AP, refer to Question 1 in the Troubleshooting section.

13. Give the file a file name, then click **Save** (optional).




14. Click **Next**.



15. Click **Exit**.



16. Click **Yes** to exit.



## Register Your Product

To ensure the highest level of customer service and support, please take a moment to register your product Online at: [www.trendnet.com/register](http://www.trendnet.com/register)  
Thank you for choosing TRENDnet

**Q1: All the settings are correct, but I can not make a wireless connection to the Access Point.**

**A1:** First, double check that the wireless LED on the Access Point is lit. Second, power cycle the Access Point. Unplug the power to the Access Point. Wait 15 seconds, then plug the power back in. Third, contact the manufacturer of your wireless network adapter. Make sure the wireless network adapter is configured with the proper SSID. The default SSID of the Access Point is **TRENDnet637**. If you have enabled any encryption on the Access Point, make sure to configure the wireless network adapter with the same Pre-shared key.

**Q2: I am trying to connect additional wireless adapters, but I don't remember the encryption (network) key. What should I do?**

**A2:** From a wired computer, log on to the access point configuration page. Click **Wireless -> Security**. The encryption key will be listed here.

**Q3: I have a wireless adapter that supports WiFi Protected Setup (WPS) push button setup. How do I setup WPS between the TEW-637AP and my wireless adapter?**

**A3:** First, press on the **WPS** button on the front of the TEW-637AP for 10 seconds. Second, refer to your wireless adapters for instructions on setting up WPS.

If you still encounter problems or have any questions regarding the **TEW-637AP**, please contact TRENDnet's Technical Support Department.

## Certifications

This equipment has been tested and found to comply with FCC and CE Rules.

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received. Including interference that may cause undesired operation.



Waste electrical and electronic products must not be disposed of with household waste. Please recycle where facilities exist. Check with you Local Authority or Retailer for recycling advice.



**NOTE:** THE MANUFACTURER IS NOT RESPONSIBLE FOR ANY RADIO OR TV INTERFERENCE CAUSED BY UNAUTHORIZED MODIFICATIONS TO THIS EQUIPMENT. SUCH MODIFICATIONS COULD VOID THE USER'S AUTHORITY TO OPERATE THE EQUIPMENT.

### ADVERTENCIA

En todos nuestros equipos se mencionan claramente las características del adaptador de alimentación necesario para su funcionamiento. El uso de un adaptador distinto al mencionado puede producir daños físicos y/o daños al equipo conectado. El adaptador de alimentación debe operar con voltaje y frecuencia de la energía eléctrica domiciliar existente en el país o zona de instalación.



## TRENDnet Technical Support

US • Canada

24/7 Tech Support

Europe (Germany • France • Italy • Spain • Switzerland • UK)

**Toll Free Telephone:** +00800 60 76 76 67

English/Espanol - 24/7

Worldwide

English/Espanol - 24/7



## Product Warranty Registration

Please take a moment to register your product online.

Go to TRENDnet's website at <http://www.trendnet.com/register>

**TRENDnet**<sup>®</sup>  
20675 Manhattan Place  
Torrance, CA 90501  
USA