



## 4-Port PS/2 KVM Switch Kit with Audio TK-408K (v1.3R)

The 4-Port PS/2 Audio KVM Switch lets you control multimedia PCs with just one keyboard, monitor, mouse, microphone, and a set of speakers. The KVM switch not only allows you to share your monitor, keyboard and mouse but you can also share microphone and speakers. With just a simple press of a button, this KVM switch eliminates the hassle of cable swapping and switching between 4 PCs. With its Auto-Scan and Hot-Key operating features, the TK-408K is the perfect choice for managing 4 PCs. Separate KVM cables are included.

## PRODUCT OVERVIEW

- 4-Port KVM switch with VGA and PS/2 connections to computers and audio devices
- Listen to music from one computer while working on the other
- High quality 2048 x 1536 resolution for a crisp display
- All required cabling included

## FEATURES

- Manage up to 4 computers/servers with one set of console devices
- PS/2 keyboard/mouse emulation with 4 sets of detachable KVM cables
- Compliant with Windows and Linux
- High video quality, up to 2048 x 1536 resolution
- Listen to music from one computer while working on the other
- Auto-Scan and LED display for easy status monitoring
- Computer selection by face panel push buttons or keyboard hot key commands
- Keyboard status restored when switching between computers
- Plug & Play
- 2-year limited warranty



## SPECIFICATIONS

### HARDWARE

<b>Connections</b>	<ul style="list-style-type: none"> <li>• 4 computers</li> </ul>		
<b>Cables</b>	<ul style="list-style-type: none"> <li>• 2 sets of 1.2 m (4 ft.) PS/2 KVM cables</li> <li>• 2 sets of 1.8 m (6 ft.) PS/2 KVM cables</li> <li>• 2 sets of 1.2 m (4 ft.) audio cable</li> <li>• 2 sets of 1.8 m (6 ft.) audio cable</li> </ul>		
<b>Cable Interface (all male)</b>		To KVM	To Computer
	KVM Cable	<ul style="list-style-type: none"> <li>• 1 x VGA/SVGA HDB 15-pin</li> </ul>	<ul style="list-style-type: none"> <li>• 1 x PS/2 keyboard 6-pin mini-DIN</li> <li>• 1 x PS/2 mouse 6-pin mini-DIN</li> <li>• 1 x VGA/SVGA HDB 15-pin</li> </ul>
	Audio Cable	<ul style="list-style-type: none"> <li>• 1 x 3.5 mm speaker jack</li> <li>• 1 x 3.5 mm microphone jack</li> </ul>	<ul style="list-style-type: none"> <li>• 1 x 3.5 mm speaker jack</li> <li>• 1 x 3.5 mm microphone jack</li> </ul>
<b>PC Port Connections (all female)</b>	<ul style="list-style-type: none"> <li>• 4 x VGA/SVGA HDB 15-pin</li> <li>• 4 x 3.5 mm speaker jack</li> <li>• 4 x 3.5 mm microphone jack</li> </ul>		
<b>Console Port Connectors (all female)</b>	<ul style="list-style-type: none"> <li>• 1 x PS/2 keyboard 6-pin mini-DIN</li> <li>• 1 x PS/2 mouse 6-pin mini-DIN</li> <li>• 1 x VGA/SVGA HDB 15-pin</li> <li>• 1 x 3.5 mm speaker jack</li> <li>• 1 x 3.5 mm microphone jack</li> </ul>		
<b>Supported OS</b>	<ul style="list-style-type: none"> <li>• Windows and Linux</li> </ul>		
<b>Computer Selection</b>	<ul style="list-style-type: none"> <li>• Front panel push buttons or keyboard hot key commands</li> </ul>		
<b>Auto-Scan Interval</b>	<ul style="list-style-type: none"> <li>• 5 seconds</li> </ul>		
<b>Keyboard State</b>	<ul style="list-style-type: none"> <li>• Save and restore</li> </ul>		
<b>Power Type</b>	<ul style="list-style-type: none"> <li>• PS/2 interface power</li> </ul>		
<b>Dimensions</b>	<ul style="list-style-type: none"> <li>• 167 x 80 x 28 mm (6.6 x 3.2 x 1.1 in.)</li> </ul>		
<b>Weight</b>	<ul style="list-style-type: none"> <li>• 178 g (6.3 oz.)</li> </ul>		
<b>Temperature</b>	<ul style="list-style-type: none"> <li>• Operating: 0°C ~ 40°C (32°F ~104°F)</li> <li>• Storage: -20°C ~ 60°C (-4°F ~140°F)</li> </ul>		
<b>Humidity</b>	<ul style="list-style-type: none"> <li>• Max 90% (non-condensing)</li> </ul>		
<b>Certifications</b>	<ul style="list-style-type: none"> <li>• CE, FCC</li> </ul>		


# 4-Port PS/2 KVM Switch Kit with Audio

TK-408K (v1.3R)



## NETWORKING SOLUTIONS

### 4-Port PS/2 KVM Switch Kit with Audio TK-408K

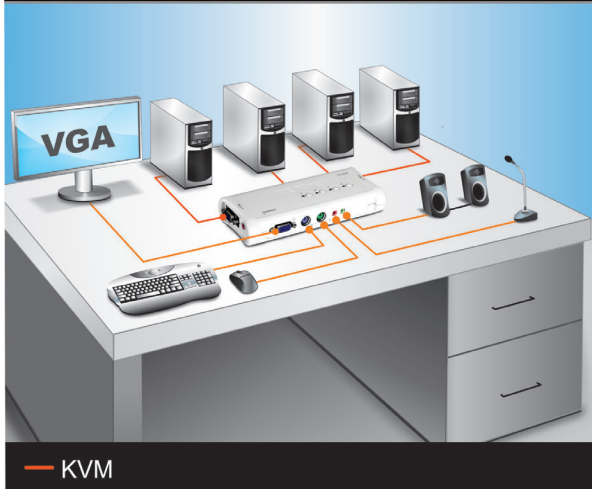

## PACKAGE CONTENTS

TK-408K

Quick Installation Guide

4 sets of PS/2 KVM cable (2 x 1.2 m / 4 ft., 2 x 1.8 m / 6 ft.)

4 sets of audio cable (2 x 1.2 m / 4 ft., 2 x 1.8 m / 6 ft.)

## RELATED PRODUCTS

TK-208K 2-Port PS/2 KVM Switch Kit with Audio

TK-407K 4-Port USB KVM Switch Kit

TK-409K 4-Port USB KVM Switch Kit w/ Audio

## CONTACT INFORMATION

**TRENDnet**

20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500

Fax: 1-310-961-5511

Web: [www.trendnet.com](http://www.trendnet.com)

Email: [sales@trendnet.com](mailto:sales@trendnet.com)

**1-888-326-6061**

