



Quick Installation Guide  

**TU2-HDMI**  
1.01

# Table of Contents

English	1
1. Before You Start	1
2. How to Install	2
3. Configure the Display Settings	4
.....	
Troubleshooting	6



### Package Contents

- TU2-HDMI
- Multi-Language Quick Installation Guide
- CD-ROM (Utility and Driver)
- 1 x USB cable (45 cm / 18 in.)

## System Requirements

- Computer with an available USB 1.1 or 2.0 port
- Monitor, Television, or Projector with a HDMI port and a resolution of 800 x 600 or higher
- HDMI Cable
- Power Adapter (5V DC) (Optional)
- Available Disk Space: 30MB

### Office, Productivity, and Web Browsing

Supported Operating Systems	CPU	Memory
Windows 7 (32/64-bit)	2.4GHz Core2Duo or above	1GB RAM or above
Windows Vista (32/64-bit)	1.6GHz Atom or Celeron or above	1GB RAM or above
Windows XP (32/64-bit)	1.6GHz Atom or Celeron or above	256MB RAM or above

### Full Screen Video Playback

Supported Operating Systems	CPU	Memory	Video Card
Windows 7 (32/64-bit)	2.4GHz Core2 Duo or above	2GB RAM or above	Intel GMA X4500, ATI Radeon HD3xxx, NVidia GeForce 9xxx or better
Windows Vista (32/64-bit)	1.8GHz Atom, Celeron, or above	1GB RAM or above	
Windows XP (32/64-bit)	1.8GHz Atom, Celeron, or above	1GB RAM or above	

## 2. How to Install

**Note:** DO NOT connect the TU2-HDMI to your computer until instructed to do so.

1. Insert the Utility and Driver CD-ROM into your computer's CD-ROM drive.


2. Click **Autorun.exe** (Windows 7/Vista only).




3. Click **Install Utility & Driver**.



4. Choose the desired language, read the **Software End User License Agreement** and then click **I Accept**.

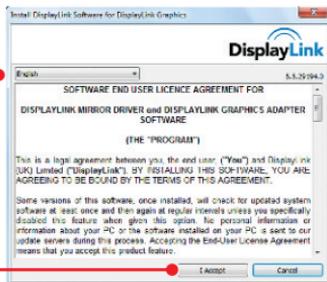

5. Connect the Mini-USB end of the USB cable to the TU2-HDMI.

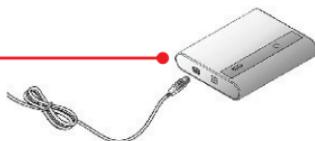


6. Connect the Type A end of the USB cable to an available USB port on your computer.




7. The computer will automatically detect and install the drivers.

8. Click **Restart Now** (Windows Vista only).

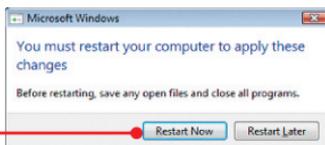

9. Connect one end of a HDMI cable to the TU2-HDMI's HDMI port.

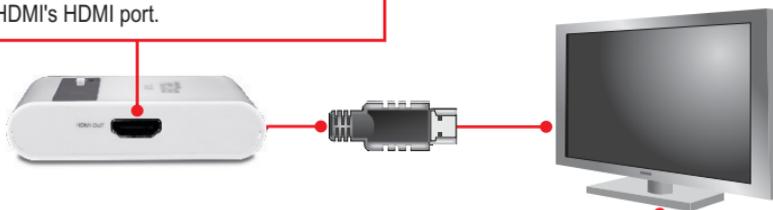

10. Connect the opposite end of a HDMI cable to your Monitor, Television or Projector's HDMI port.


11. (Optional) Repeat steps 6-10 for each additional adapter. Note: A maximum of 6 TU2-HDMIs can be simultaneously connected to one computer.

**Your installation is now complete**

## 3. Configure the Display Settings


### Extended Desktop

#### Extended View (Image divided over multiple TVs)

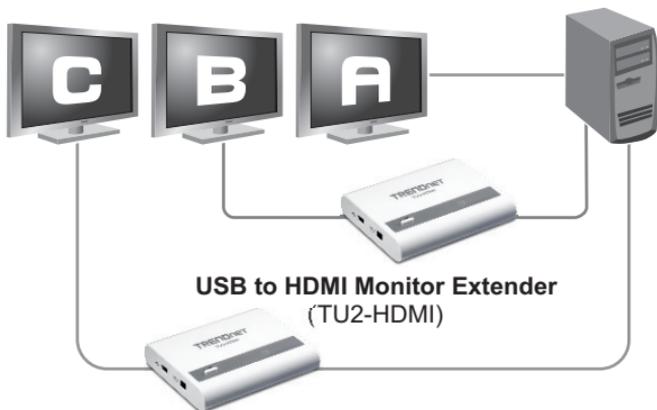

### Windows 7

1. Hold down the Windows key and press P on your keyboard. Press P until Extend is selected. Then let go of the Windows Key.

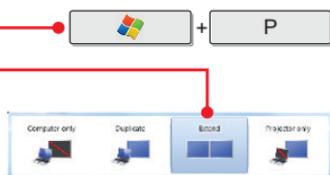


### Windows Vista/XP

1. Right click on the utility icon.




2. Select Extend.

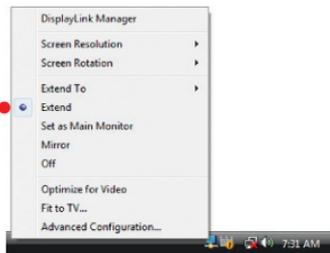


## Mirror

### Mirror View (Image repeated over multiple TVs)

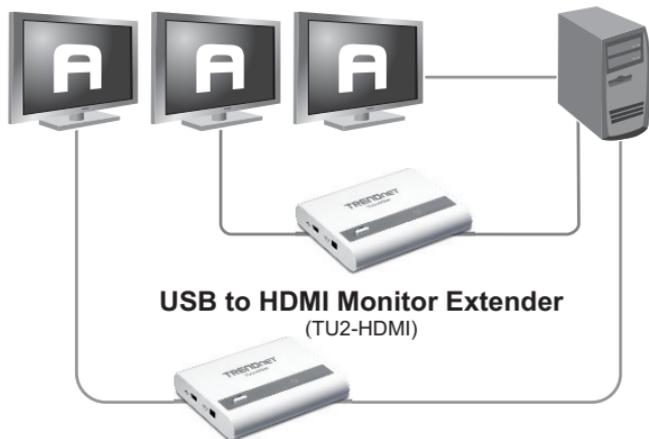

### Windows 7

1. Hold down the Windows key and press P on your keyboard. Press P until Duplicate is selected. Then let go of the Windows Key.

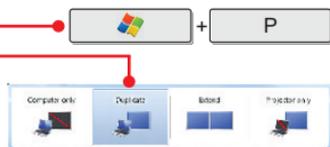


### Windows Vista/XP

1. Right click on the utility icon.



2. Select Mirror.

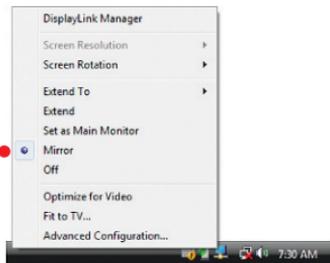

Your configuration is now complete.

## 1. Windows is unable to recognize my hardware. What should I do?

1. Verify that your computer meets the system requirements as specified in section 1.
2. Access the device manager and verify the USB device on the host computer are installed properly.
  1. To access the device manager on Windows 7, click on the Windows icon on the bottom left-hand corner, click **Computer**, click **System Properties** and then click **Device Manager**. Double click on **USB Display Adapters**. Make sure that **USB HDMI Adapter** is listed and there is no yellow question mark or exclamation point.
  2. To access the device manager on Windows Vista, right-click **Computer**, click **Properties** and then click **Device Manager**. Double click on **USB Display Adapters**. Make sure that **USB HDMI Adapter** is listed and there is no yellow question mark or exclamation point.
  3. To access the device manager on Windows XP, right-click **My Computer**, click **Properties**, click the **Hardware** tab, and then click **Device Manager**. Right click on **My Computer** → **Properties**. Double click on **USB Display Adapters**. Make sure that **USB HDMI Adapter** is listed and there is no yellow question mark or exclamation point.
3. Try plugging the device into a different USB port on the computer.

## 2. Can I connect or disconnect TU2-HDMI while the computer is on?

Yes, you can connect or disconnect TU2-HDMI while the computer is on because the USB interface is Plug-and-Play compliant and hot-pluggable

## 3. How many TU2-HDMIs can I connect to my computer?

You can connect up to 6 TU2-HDMIs to your computer.

If you still encounter problems or have any questions regarding the **TU2-HDMI**, please contact TRENDnet's Technical Support Department.

## Certifications

This equipment has been tested and found to comply with FCC and CE Rules.

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received. Including interference that may cause undesired operation.



Waste electrical and electronic products must not be disposed of with household waste. Please recycle where facilities exist. Check with you Local Authority or Retailer for recycling advice.



**NOTE:** THE MANUFACTURER IS NOT RESPONSIBLE FOR ANY RADIO OR TV INTERFERENCE CAUSED BY UNAUTHORIZED MODIFICATIONS TO THIS EQUIPMENT. SUCH MODIFICATIONS COULD VOID THE USER'S AUTHORITY TO OPERATE THE EQUIPMENT.

### ADVERTENCIA

En todos nuestros equipos se mencionan claramente las características del adaptador de alimentación necesario para su funcionamiento. El uso de un adaptador distinto al mencionado puede producir daños físicos y/o daños al equipo conectado. El adaptador de alimentación debe operar con voltaje y frecuencia de la energía eléctrica domiciliar existente en el país o zona de instalación.



## Product Warranty Registration

Please take a moment to register your product online.  
Go to TRENDnet's website at <http://www.trendnet.com/register>