





# **24-Port Gigabit GREENnet Switch** TEG-S24g(V1.OR)

The 24-Port Gigabit GREENnet Switch, model TEG-S24g, provides high bandwidth performance, ease of use and reliability, all while reducing power consumption by up to 70%\*.

GREENnet technology automatically adjusts power voltage as needed, resulting in substantial energy savings. Embedded GREENnet technology works right out of the box with no management requirement.

Boost office network efficiency and eliminate network congestion with Gigabit speeds and a total switching capacity of 48Gbps with Full-Duplex mode. A built in universal power supply reduces cable clutter and diagnostic LEDs help with network troubleshooting. Plug and Play this sturdy metal switch for reliable high-speed network connectivity.

# **FEATURES**

- 24 x 10/100/1000Mbps Auto-MDIX Gigabit Ethernet ports
- On / off power switch
- Features a 48Gbps forwarding capacity
- Internal power supply reduces clutter
- GREENnet technology reduces power consumption when:
  - a. Ethernet port is not in use
  - b. Connected device is turned off
  - c. Connected device is in power-saving mode
  - d. Based on Ethernet cable length
- IEEE 802.3x Flow Control for full-duplex mode
- Back pressure Flow Control for half-duplex mode
- Store-and-Forward switching architecture with non-blocking wire-speed performance
- Integrated address look-up engine with an 8K MAC address table
- 3.5MBits RAM data buffer
- · Operates and maximizes packet filtering and forwarding rate
- Jumbo Frame support up to 9216Bytes
- · Rackmount hardware included
- · Sturdy metal housing
- · Diagnostic LEDs and Plug & Play support
- · Limited lifetime warranty

# 24-Port Gigabit GREENnet Switch

TEG-S24g(V1.0R)


#### **SPECIFICATIONS**

HARDWARE	
Standards	<ul> <li>IEEE 802.3 10Base-T; IEEE 802.3u 100Base-TX</li> <li>IEEE 802.3ab 1000Base-T; IEEE 802.3x Flow Control;</li> </ul>
Network Media	<ul> <li>Ethernet: Cat. 5 up to 100 m</li> <li>Fast Ethernet: Cat. 5 and 5e up to 100 m</li> <li>Gigabit Ethernet: Cat. 5e and 6 up to 100 m</li> </ul>
Data Rate	Ethernet: 10Mbps/20Mbps (half/full-duplex)     Fast Ethernet: 100Mbps/200Mbps (half/full-duplex)     Gigabit Ethernet: 2000Mbps (full-duplex)
Protocol / Topology	CSMA /CD, Star
Power Consumption	• 13 Watts (max.)
Switch Fabric	• 48Gbps
Interface	• 24 x 10/100/1000Mbps Auto-MDIX RJ-45 ports
Power Button	On / off power button
Data RAM Buffer	• 3.5MBits
Filtering Table	8K entries
Jumbo Frame Support	• Up to 9216Bytes
Diagnostic LED	Power, Link/ACT, 100Mbps, 1000Mbps
Power	• 100~240VAC, 50/60Hz Internal universal switching power
Dimension	• 440 x 210 x 45 mm (17.4 x 8.3 x 1.8 in.)
Weight	• 2.3 kg (5 lbs.)
Temperature	• Operating: 0° ~ 40° C (32° ~ 104° F) Storage: -10° ~ 70° C (14° ~ 158° F)
Humidity	Max. 90% (non-condensing)
Certifications	• CE, FCC

<sup>\*</sup> Max power savings compared with standard TRENDnet switches.

TRENDnet offers a limited lifetime warranty for all of its metal-enclosed network switches that have been purchased in the United States/Canada on or after 1/1/2015. Cooling fan and internal power supply carry a one-year warranty

#### **NETWORKING SOLUTIONS**

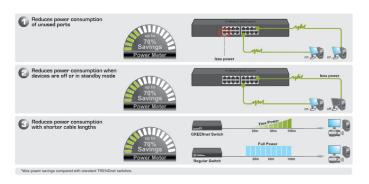

#### PACKAGE CONTENTS

Rackmount hardware
Power cord (1.8m / 6ft.)
Multi-Language Quick Installation Guide
TEG-S24g
TACKAOL CONTLINIO

## RELATED PRODUCTS

TEW-639GR	300Mbps Wireless N Gigabit Router
TEG-S16g	16-Port Gigabit GREENnet Switch
TEG-PCITXR	Gigabit PCI Adapter

#### **CONTACT INFORMATION**

## TRENDNET<sup>®</sup>

20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500 Fax: 1-310-961-5511 Web: www.trendnet.com Email: sales@trendnet.com 1-888-326-6061

