


## 6-Port Hardened Industrial Gigabit PoE+ DIN-Rail Switch

TI-PG62 (v1.0R)


- 4 x Gigabit PoE+ ports
- 1 x shared Gigabit port (RJ-45 / SFP)
- 1 x dedicated SFP slot
- 120 Watt power budget
- 12 Gbps switching capacity
- Hardened IP30 rated metal switch
- Includes wall and DIN-rail mounts
- Extreme -40 to 75 °C (-40 to 167 °F) operating temperature range
- Dual redundant power inputs with overload current protection
- Alarm output triggered by power failure
- Power supply sold separately (models: 48VDC3000 / TI-S24048 / TI-S12048)

TRENDnet's TI-PG62 is a reliable IP30 unmanaged DIN-rail PoE+ switch with a rugged housing rated for extreme industrial environments. It offers 4 Gigabit PoE+ ports, one shared Gigabit port (RJ-45 / SFP), one dedicated SFP slot, and a 12 Gbps switching capacity. Dual redundant power inputs and a power failure alarm relay.

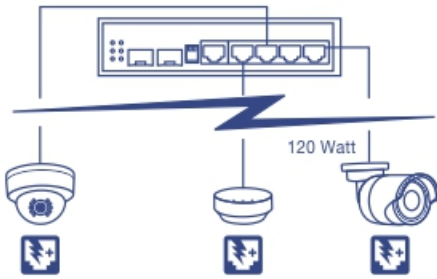

### PoE Power

A 120 Watt PoE+ power budget supplies up to four Power over Ethernet devices with PoE+ power.

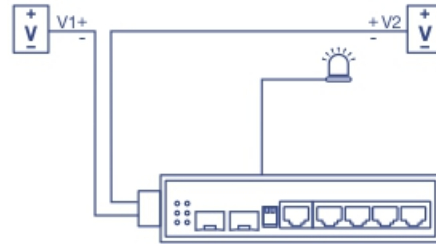

### Fault Tolerance


Features dual redundant power inputs (Primary and RPS) from external power sources and an output alarm relay to indicate the event of input power failure.



### Industrial Hardened Design

Equipped with a rugged IP30 rated enclosure and designed to withstand a high degree of vibration, shock, protection against ESD / EMI / surge, and operate with a wide temperature range (- 40 – 75 °C (- 40 - 167 °F)) for harsh environments.

## Networking Solution

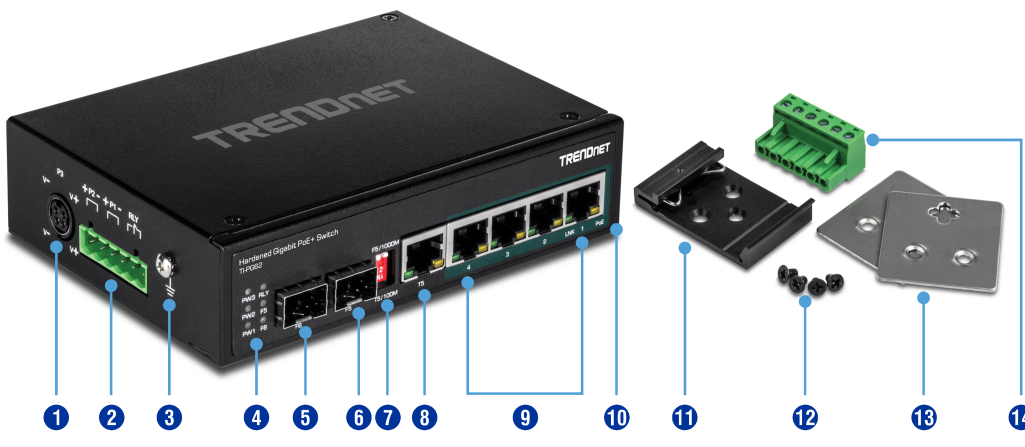

- 1 AC power port
- 2 Terminal slot for DC power
- 3 Grounding point
- 4 LED indicators
- 5 Gigabit SFP slot
- 6 Shared Gigabit SFP slot
- 7 Dip switches
- 8 Shared Gigabit port
- 9 Gigabit PoE+ ports
- 10 IP30 rated metal housing
- 11 Din-rail mount
- 12 Screws
- 13 Wall mount kit
- 14 Terminal block



### Network Ports

4 x Gigabit PoE+ ports, 1 x shared Gigabit port (RJ-45 / SFP) and 1 x dedicated SFP slot



### DIN-Rail / Wall Mounts

IP30 rated metal enclosure with included DIN-rail and wall mount hardware



### Switching Capacity

12 Gbps switching capacity



### Redundant Power

Dual redundant power inputs with overload current protection (power supply sold separately models: 48VDC3000 / TI-S24048 / TI-S12048)



### Alarm Relay

Alarm relay triggered by power failure of primary and / or redundant power



### Jumbo Frame

Sends larger packets, or Jumbo Frames (up to 9 KB), for increased performance



### Extreme Temperatures

Hardened switch is rated for an operating temperature range of -40 to 75 °C (-40 to 167 °F)



### Electro Magnetic Compliance

Complies with FCC Part 15 Subpart B Class A and CE EN 55022 Class A standards



### Certifications

Rated for information technology (ITE) equipment (EN55022 / 24); industrial, scientific, and medical (ISM) Equipment (EN55011)



### Shock and Vibration Resistant

Rated for shock (IEC 60068-2-27), freefall (IEC 60068-2-32), and vibration (IEC 60068-2-6)



### Grounding Point

Grounding point protects equipment from external electrical surges

## Specifications

### Standards

- IEEE 802.3
- IEEE 802.3u
- IEEE 802.3ab
- IEEE 802.3z
- IEEE 802.3x
- IEEE 802.3af
- IEEE 802.3at

### Device Interface

- 4 x Gigabit PoE+ ports
- 1 x Shared Gigabit port
- 1 x Shared SFP slot
- 1 x Dedicated SFP slot
- 6-pin removable terminal block
- LED indicators
- DIP switch
- DIN-Rail mount
- Wall mount
- Grounding point

### Data Transfer Rate

- Ethernet: 10 Mbps (half duplex), 20 Mbps (full duplex)
- Fast Ethernet: 100 Mbps (half duplex), 200 Mbps (full duplex)
- Gigabit: 2000 Mbps (full duplex)

### Performance

- Data RAM Buffer: 128 KB
- Switching Fabric: 12 Gbps
- MAC Address Table: 1 K entries
- Jumbo Frame: 9 KB
- Forwarding rate: 8.9 Mpps (64-byte packet size)

### Special Features

- Hardened components rated for extreme temperatures

- Dual redundant power inputs
- Auto-Negotiation
- Auto store and forward architecture
- Automatic address learning and address aging

### DC Power

- Input: 48 - 56 V DC
- Compatible power supply: TI-S12048 (sold separately)
- Consumption: Max. 5.76 Watts (no PoE)

### AC Power

- Input: 100 - 240 V AC, 50/60 Hz, 2 A
- Compatible power adapter: 48VDC3000 (sold separately)
- Output: 48V DC, 3.34 A 160 W max.

### PoE

- PoE budget: 120 Watts

### Terminal Block

- Redundant power inputs, alarm relay contact, 6 pin
- Wire range: 0.34 mm<sup>2</sup> to 2.5 mm<sup>2</sup>
- Solid wire (AWG): 12-24/14-22
- Stranded wire (AWG): 12-24/14-22
- Torque: 5 lb. – In / 0.5 Nm / 0.56 Nm
- Wire strip length: 7-8 mm

### DIP Switch

- 1: OFF (port 5 SFP on, default), ON (port 5 SFP off)
- 2: OFF (SFP 1000M, default), ON (SFP 100M)

### Alarm Relay Contact

- Relay outputs with current carrying capacity of 1A, 24V DC
- Open circuit mode when two power sources are connected

- Short circuit mode when only one power source is connected

### MTBF

- 460,304 hours

### Housing

- IP30 metal case
- DIN-rail mount
- Wall mount
- Grounding point
- ESD Protection: Contact: 6kV / Air: 8kV
- Surge Protection: 2kV

### Operating Temperature

- - 40 to 75 °C (-40 to 167 °F)

### Operating Humidity

- Max. 95 % non-condensing

### Dimensions

- 143 x 105 x 36 mm (5.6 x 4.1 x 1.4 in.)

### Weight

- 500 g (1.1 lb)

### Certifications

- CE
- FCC
- Shock (IEC 60068-2-27)
- Freefall (IEC 60068-2-32)
- Vibration (IEC 60068-2-6)

### Warranty

- 3 year limited

### Package Contents

- TI-PG62
- Quick Installation Guide
- Removable terminal block
- DIN-rail and wall mount kit

