



16-Port Stackable Rack Mount USB KVM Switch with OSD

TK-1604R

The 16-Port USB KVM Switch with On Screen Display (TK-1604R) lets you manage multiple computers with just one set of keyboard, monitor and mouse. This rack mount device supports USB and PS/2 interface on the console side and USB interface on the PC side. Users can switch between PCs using hot-key, push button or On Screen Display for flexible management. Hot-plug PCs quickly to avoid downtime. A maximum of 128 PC connections are supported when you daisy chain multiple TK-1604R(s). The 16-Port USB KVM Switch is the perfect choice for managing multiple PC's.

FEATURES

- 16-port stackable USB KVM switch with On Screen Display (OSD)
- Console port supports both USB & PS/2 interface
- Supports Microsoft IntelliMouse, IntelliMouse Explorer, Logitech NetMouse, Optical Mouse, and other MS compatible mice
- Supports Windows 98SE / ME / 2000 / XP / 2003 Server / Vista, Linux, Mac OS and more
- High video quality; up to 2048 x 1536 VGA resolution
- Firmware upgradeable via computer's serial port
- On Screen Display (OSD) control for easy management
- Adjustable auto-scan via OSD control for monitoring multiple computers
- Keyboards status restored when switching between computers
- LED display for easy status monitoring
- Password protection with auto timeout logout
- Auto-detect bank number when daisy-chaining
- Built-in daisy-chain port for cascading up to 8 levels (64 computers)
- Beeping sound for port switching confirmation (enable/disable)
- Plug & play and hot-pluggable
- Standard 19" (1U) rack mount design
- 2-year warranty

16-Port Stackable Rack Mount USB KVM Switch with OSD


TK-1604R

SPECIFICATIONS


Hardware	
Management	• 16 computers
Standard	• USB 1.1 compliant
PC Ports	• 16 x VGA HDB 15-pin (female)
Console Port	• 1 x USB (type A) / PS/2 (6-pin Mini Din) mouse • 1 x USB (type A) / PS/2 (6-pin Mini Din) keyboard • 1 x VGA HDB 15-pin (female)
Supported OS	• Windows 95/98(SE)/ME/ 2000/NT/XP/2003 Server/Vista, Linux, Mac and more
PC Selection	• Hot-key, push buttons or On Screen Display control (OSD)
Daisy Chain	• 8 levels (up to 128 computers)
Auto-Scan Interval	• 10-100 seconds (programmable through OSD menu)
LEDs	• On-line (red), select (green)
Keyboard Status	• Saved & restored
Power Adapter	• 9V DC 1A external power adapter
Dimension (W x H x D)	• 407 x 165 x 45mm (16.0 x 6.5 x 1.8in.)
Weight	• 2.06kg (4.54lb.)
Temperature	• Operating: 0 °C~40 °C (32 °F~104 °F) Storage: -20 °C~60 °C (-4 °F~140 °F)
Humidity	• 0%~80% (non-condensing)
Certification	• CE, FCC

NETWORKING SOLUTIONS

Stand Alone

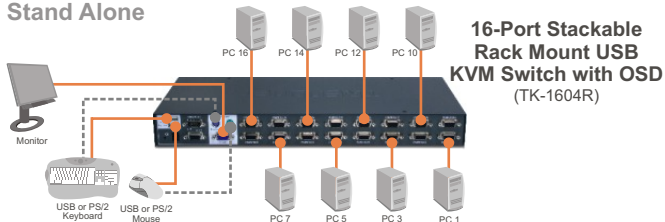

Daisy-Chain

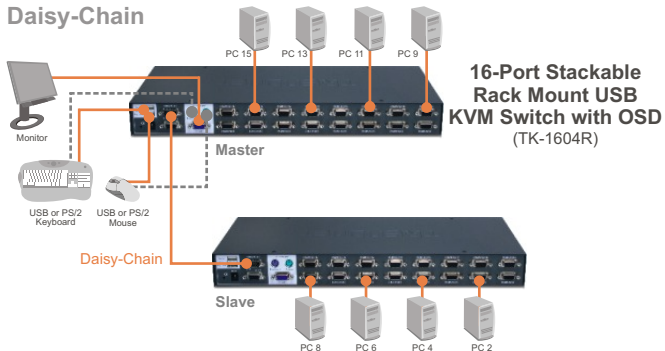

PACKAGE CONTENTS

- TK-1604R
- Multi-language quick installation guide
- 1 x daisy-chain cable, 1 x daisy-chain terminator, 1 x firmware upgrade cable
- Power adapter (9VDC, 1A)
- Rack mount kit

RELATED PRODUCTS

TK-802R	8-Port Stackable Rack Mount KVM Switch with OSD
TK-803R	8-Port Rack Mount USB KVM Switch
TK-804R	8-Port Stackable Rack Mount USB KVM Switch with OSD
TK-1602R	16-Port Stackable Rack Mount KVM Switch with OSD
TK-1603R	16-Port Rack Mount USB KVM Switch

ORDERING INFORMATION

TRENDnet®

20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500

Fax: 1-310-961-5511

Web: www.trendnet.com

Email: sales@trendnet.com

To Order Please Call:

1-888-326-6061

